
chanhvinh.com

SA5004

Flow sensor

SAD10XDB50KG/US-100

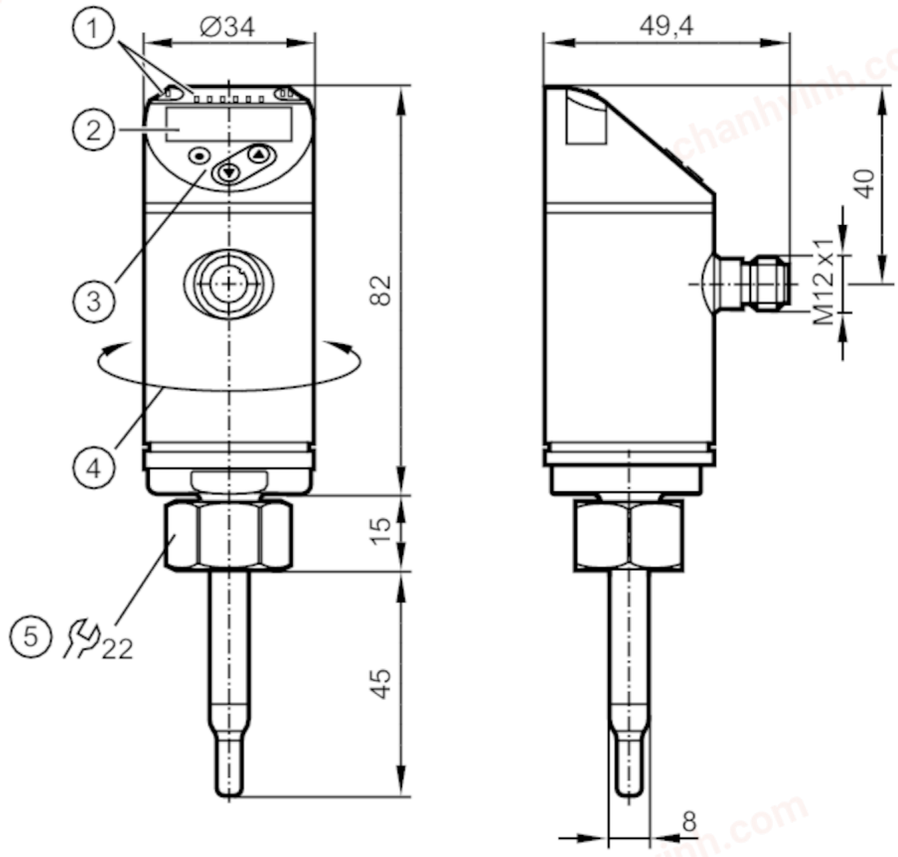

1 LEDs Display unit
I, II not used
2 alphanumeric display 4-digit red/green
3 programming buttons
4 upper part of the housing can be rotated 345°

Product characteristics		
Number of inputs and outputs		Number of analogue outputs: 2
Process connection		threaded connection M18 x 1,5 internal thread
Application		
Special feature		Gold-plated contacts
Media		water; glycol solutions; air; oils
Note on media		low-viscosity oils with viscosity: ≤ 40 mm²/s (40 °C) high-viscosity oils with viscosity: > 40 mm²/s (40 °C)
Medium temperature	[°C]	-20...90
Pressure rating	[bar]	100
Pressure rating	[Mpa]	10
MAWP (for applications according to CRN)	[bar]	100
Electrical data		
Operating voltage	[V]	18...30 DC
Current consumption	[mA]	< 100
Protection class		III

chanhvinh.com

SA5004

Flow sensor

SAD10XDB50KG/US-100

Reverse polarity protection		yes
Power-on delay time	[s]	10
Inputs / outputs		
Number of inputs and outputs		Number of analogue outputs: 2
Outputs		
Total number of outputs		2
Output signal		analogue signal
Number of analogue outputs		2
Analogue current output	[mA]	4...20; (scalable)
Max. load	[Ω]	350
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Measuring/setting range		
Probe length L	[mm]	45
Operating mode		relative; absolutely liquid; absolutely gaseous; (absolute: reference measurement recommended; Factory setting: relative)
Temperature monitoring		
Measuring range	[°C]	-20...90
Resolution	[°C]	0.2
Analogue start point	[°C]	-20...76
Analogue end point	[°C]	4...100
In steps of	[°C]	0.2
Liquid media - absolute operating mode		
Setting range	[m/s]	0.04...3
Greatest sensitivity	[m/s]	0.04...3
Liquid media - relative operating mode		
Setting range	[m/s]	0.04...6
Greatest sensitivity	[m/s]	0.04...3
Gases - operating mode "absolute"		
Setting range	[m/s]	0...100
Greatest sensitivity	[m/s]	30...100
Gases - operating mode "relative"		
Setting range	[m/s]	0...200
Greatest sensitivity	[m/s]	30...100
Accuracy / deviations		
Temperature drift	[cm/s x 1/K]	0,003 m/s x 1/K (< 20 °C; > 70 °C)
Temperature gradient	[K/min]	100
Absolute operating mode		
Repeatability		0,05 m/s; (water; flow velocity: 0,05...3 m/s)

chanhvinh.com

SA5004

Flow sensor

SAD10XDB50KG/US-100

Relative operating mode		
Accuracy		± (7 % MW + 2 % MEW); (for relative mode in the range of maximum sensitivity under the following conditions:; water: 20...70 °C; inlet length: 1.5 m; DN25 (DIN 2448); mounting position according to instructions; Accuracy can differ for other media and mounting positions.)
Repeatability		0,05 m/s; (water; flow velocity: 0,05...3 m/s)
Temperature monitoring		
Temperature drift		± 0,005 K/°C
Accuracy	[K]	± 0,3 / ± 1; (water; flow velocity: 0,3...3 m/s / air; flow velocity: > 10 m/s)
Response times		
Response time	[s]	0.5; (T09; water; glycol: 0,8 s; air: 7 s; oil: 1,8 s; each T09)
Temperature monitoring		
Dynamic response T05 / T09	[s]	1,5 (T09); (water; flow velocity: 0,3...3 m/s)
Software / programming		
Parameter setting options		medium selection; Damping; Teach function; display can be rotated and switched off; standard unit of measurement; process value colour
Operating conditions		
Ambient temperature	[°C]	-40...80
Storage temperature	[°C]	-40...100
Protection		IP 65; IP 67
Tests / approvals		
EMC		DIN EN 60947-5-9
Shock resistance		DIN EN 60068-2-27: 50 g (11 ms)
Vibration resistance		DIN EN 60068-2-6: 20 g (10...2000 Hz)
MTTF	[years]	180
UL approval		UL Approval no.: I004
		File number UL: E174189
Mechanical data		
Weight	[g]	281
Materials		stainless steel (1.4404 / 316L); stainless steel (1.4310 / 301); PBT-GF20; PBT-GF30
Materials (wetted parts)		stainless steel (1.4404 / 316L); Gasket: FKM
Process connection		threaded connection M18 x 1,5 internal thread
Displays / operating elements		
Display		Display unit: 6 x LED, green (%, m/s, l/min, m³/h, °C, 10³)
		measured values: alphanumeric display, red/green 4-digit
Remarks		
Remarks		MW = measured value
		MEW = Final value of the measuring range
Pack quantity		1 pcs.

chanhvinh.com

SA5004

Flow sensor


SAD10XDB50KG/US-100

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

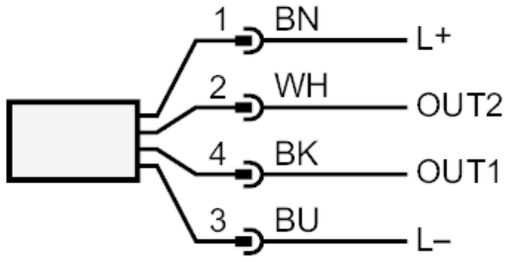

	colours to DIN EN 60947-5-2
OUT1:	analogue output Temperature monitoring
OUT2:	analogue output volumetric flow quantity monitoring
	Core colours :
BK =	black
BN =	brown
BU =	blue
WH =	white