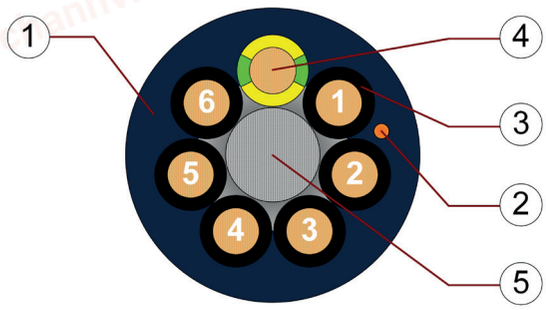
chanhvinh.com

Data sheet
chainflex® CF9

Control cable (Class 7.6.4.2) ● For heaviest duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● PVC and halogen-free ● Low-temperature-flexible ● Hydrolysis and microbe-resistant



Example image



1. Outer jacket: Pressure extruded, gusset-filling, halogen-free TPE mixture
2. CFRIP: Tear strip for faster cable stripping
3. Core insulation: Mechanically high-quality TPE mixture
4. Conductor: Stranded conductor in especially bend-resistant version consisting of bare copper wires
5. Strain relief: Tensile stress-resistant centre element
6. 12 cores or more: Bundles with optimised pitch length and pitch direction

Example image
For detailed overview please see design table

Cable structure

Conductor	Stranded conductor in especially bending-resistant version consisting of bare copper wires (following DIN EN 60228).
Core insulation	Mechanically high-quality TPE mixture.
Core structure	**Number of cores < 12:** Cores wound in a layer with short pitch length. **Number of cores ≥ 12:** Cores wound in bundles which are then wound around a high tensile strength centre element, all with optimised short pitch lengths and directions. Especially low-torsion structure.
Core identification	**Cores < 0.75 mm²:** Colour code in accordance with DIN 47100. **Cores ≥ 0.75 mm²:** Black cores with white numbers, one green-yellow core. **CF9.02.03.INI:** brown, blue, black **CF9.03.04.INI:** brown, blue, black, white **CF9.03.05.INI:** brown, blue, black, white, green-yellow **CF9.03.16.07.03.INI:** **0.34 mm²:** violet/red/grey/red-blue,green/grey-pink/white-green/white-yellow,white-grey/black/yellow-brown/brown-green,white/yellow/pink/grey-brown **0.75 mm²:**blue/green-yellow/brown
Outer jacket	Low-adhesion, extremely abrasion-resistant and highly flexible TPE mixture, adapted to suit the requirements in e-chains®. Colour: Steel-blue (similar to RAL 5011) Printing: white
CFRIP®	Strip cables faster: a tear strip is moulded into the outer jacket Video ▶ www.igus.eu/CFRIP

„00000 m“ igus chainflex CF9.--.--① -----② 300/500V EAC CE**

RoHS-II conform www.igus.de +++ chainflex cable works +++

*** Length printing:** Not calibrated. Only intended as an orientation aid.
① / ② Cable identification according to Part No. (see technical table).
Example: ... chainflex ... **CF9.02.08** ... **8x0.25** ... **300 V/500 V** ...

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

chanhvinh.com

Data sheet
chainflex® CF9

Control cable (Class 7.6.4.2) ● For heaviest duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● PVC and halogen-free ● Low-temperature-flexible ● Hydrolysis and microbe-resistant



Example image

Dynamic information

Bend radius		e-chain® linear	minimum 5 x d
		flexible	minimum 4 x d
		fixed	minimum 3 x d
Temperature		e-chain® linear	-35 °C up to +100 °C
		flexible	-50 °C up to +100 °C (following DIN EN 60811-504)
		fixed	-55 °C up to +100 °C (following DIN EN 50305)
v max.		unsupported	10 m/s
		gliding	6 m/s
a max.		100 m/s²	
Travel distance		Unsupported travel distances and up to 400 m for gliding applications, Class 6	
Torsion		± 90°, with 1 m cable length, Class 2	

These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.

Guaranteed service life according to guarantee conditions

Double strokes	5 million	7.5 million	10 million
Temperature, from/to [°C]	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]
-35/-25	6.8	7.5	8.5
-25/+90	5	6	7
+90/+100	6.8	7.5	8.5

Minimum guaranteed service life of the cable under the specified conditions.
The installation of the cable is recommended within the middle temperature range.

Electrical information

Nominal voltage		300/500 V (following DIN VDE 0298-3)
Testing voltage		2000 V (following DIN EN 50395)

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

chanhvinh.com

Data sheet
chainflex® CF9

Control cable (Class 7.6.4.2) ● For heaviest duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● PVC and halogen-free ● Low-temperature-flexible ● Hydrolysis and microbe-resistant



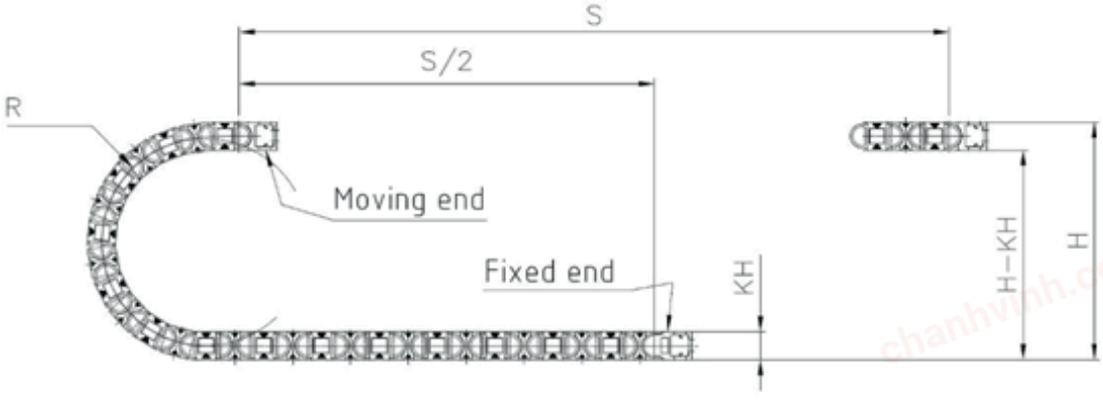
Example image

Properties and approvals

UV resistance	High
Oil resistance	Oil resistant (following DIN EN 60811-404), bio-oil resistant (following VDMA 24568 with Plantocut 8 S-MB tested by DEA), Class 4
Silicone-free	Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
Halogen-free	Following DIN EN 60754
EAC	Certificate No. RU C-DE.ME77.B.01254 (TR ZU)
Lead-free	Following 2011/65/EC (RoHS-II)
Clean room	According to ISO Class 1, material/cable tested by IPA according to DIN EN ISO standard 14644-1
CE	Following 2014/35/EU

Typical lab test setup for this cable series

Test bend radius R	approx. 18 - 125 mm
Test travel S	approx. 1 - 15 m
Test duration	minimum 2 - 4 million double strokes
Test speed	approx. 0.5 - 2 m / s
Test acceleration	approx. 0.5 - 1.5 m / s²



© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

chanhvinh.com

Data sheet
chainflex® CF9

Control cable (Class 7.6.4.2) ● For heaviest duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● PVC and halogen-free ● Low-temperature-flexible ● Hydrolysis and microbe-resistant



Example image

Typical application areas

- For heaviest duty applications, Class 7
- Unsupported travel distances and up to 400 m and more for gliding applications, Class 6
- Almost unlimited resistance to oil, also with bio-oils, Class 4
- Torsion ± 90°, with 1 m cable length, Class 2
- Indoor and outdoor applications, UV-resistant
- Storage and retrieval units for high-bay warehouses, Machining units/machine tools, quick handling, Clean room, semiconductor insertion, outdoor cranes, low temperature applications

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

chanhvinh.com

Data sheet
chainflex® CF9

Control cable (Class 7.6.4.2) ● For heaviest duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● PVC and halogen-free ● Low-temperature-flexible ● Hydrolysis and microbe-resistant



Example image

Technical tables:

Mechanical information

Part No.	Number of cores and conductor nominal cross section [mm²]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
CF9.02.02	2x0.25	4.5	5	18
CF9.02.03.INI	3x0.25	4.5	8	21
CF9.02.06	6x0.25	5.5	15	36
CF9.02.07	7x0.25	6.5	18	43
CF9.02.08	8x0.25	6.5	20	49
CF9.02.12	12x0.25	8.0	30	71
CF9.02.18	18x0.25	9.5	45	102
CF9.02.20	20x0.25	9.5	50	109
CF9.02.25	25x0.25	11.0	63	141
CF9.03.04.INI	4x0.34	5.0	14	31
CF9.03.05.INI	5x0.34	5.5	17	37
CF9.03.06	6x0.34	6.0	21	44
CF9.03.08	8x0.34	7.0	28	58
CF9.03.16.07.03.INI	16x0.34+3x0.75	11.0	77	154
CF9.05.02	2x0.5	5.0	10	26
CF9.05.03	3x0.5	5.0	15	31
CF9.05.04	4x0.5	5.5	20	39
CF9.05.05	5x0.5	6.0	25	47
CF9.05.07	7x0.5	7.0	35	64
CF9.05.12	12x0.5	10.0	60	117
CF9.05.18	18x0.5	11.5	90	172
CF9.05.25	25x0.5	13.0	124	227
CF9.05.36	36x0.5	15.5	178	322
CF9.07.04	4G0.75	6.0	30	54
CF9.07.05	5G0.75	6.5	38	66
CF9.07.07	7G0.75	8.0	53	91
CF9.07.12	12G0.75	11.0	90	165
CF9.07.20	20G0.75	13.5	149	257
CF9.07.25	25G0.75	14.5	186	317
CF9.10.03	3G1.0	6.0	30	52
CF9.10.04	4G1.0	6.5	40	67
CF9.10.05	5G1.0	7.5	50	81
CF9.10.12	12G1.0	12.0	119	206
CF9.10.18	18G1.0	14.5	178	302
CF9.10.25	25G1.0	17.0	248	433

Note: The given outer diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core **x =** without earth core

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

chanhvinh.com

Data sheet
chainflex® CF9

Control cable (Class 7.6.4.2) ● For heaviest duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● PVC and halogen-free ● Low-temperature-flexible ● Hydrolysis and microbe-resistant



Example image

Part No.	Number of cores and conductor nominal cross section [mm²]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
CF9.15.02	2x1.5	6.5	30	55
CF9.15.04	4G1.5	7.5	61	87
CF9.15.05	5G1.5	8.0	76	105
CF9.15.07 [17)]	7G1.5	9.5	107	144
CF9.15.12	12G1.5	13.5	179	278
CF9.15.18	18G1.5	16.5	268	395
CF9.15.25	25G1.5	20.0	371	607
CF9.15.36	36G1.5	23.5	530	798
CF9.25.04	4G2.5	9.0	100	152
CF9.25.05	5G2.5	10.0	124	197
CF9.25.07 [17)]	7G2.5	12.0	176	245
CF9.25.12	12G2.5	17.5	297	515
CF9.25.16	16G2.5	19.5	396	687
CF9.25.18 [7)]	18G2.5	23.0	445	830
CF9.25.25	25G2.5	24.5	612	1011
CF9.40.04	4G4.0	10.5	159	218
CF9.60.04	4G6.0	12.5	238	315
CF9.60.05	5G6.0	13.5	297	390
CF9.100.04	4G10.0	16.5	396	553
CF9.160.04	4G16.0	18.0	495	685

[17)] When using the cables with “7 G 1.5 mm²” and “7 G 2.5 mm²” minimum bend radius must be 17.5 x d with gliding travel distance ≥ 5 m.
[7)] Nominal voltage 600/1000 V

Note: The given outer diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core **x =** without earth core

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

chanhvinh.com

Data sheet
chainflex® CF9

Control cable (Class 7.6.4.2) ● For heaviest duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● PVC and halogen-free ● Low-temperature-flexible ● Hydrolysis and microbe-resistant



Example image

Electrical information

Conductor nominal cross section [mm²]	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km]	Maximum current rating at 30 °C (following DIN VDE 0298-4) [A]
0.25	79.0	5
0.34	57.0	7
0.5	39.0	10
0.75	26.0	14
1	19.5	17
1.5	13.3	21
2.5	8.0	30
4	4.95	41
6	3.3	53
10	1.91	74
16	1.21	99

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.

chanhvinh.com

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

chanhvinh.com











Data sheet
chainflex® CF9

Control cable (Class 7.6.4.2) ● For heaviest duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● PVC and halogen-free ● Low-temperature-flexible ● Hydrolysis and microbe-resistant



Example image

Design table

Part No.	Number of cores	Core design	Part No.	Number of cores	Core design
CF9.XX.16.XX.03.INI	4x4x0.34 +3x0.75		CF9.XX.05.INI	5	
CF9.XX.02	2		CF9.XX.05	5	
CF9.XX.03.INI	3		CF9.XX.06	6	
CF9.XX.03	3		CF9.XX.07	7	
CF9.XX.04.INI	4		CF9.XX.08	8	
CF9.XX.04	4		CF9.XX.12	4x3	

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.




chanhvinh.com



Data sheet
chainflex® CF9

Control cable (Class 7.6.4.2) ● For heaviest duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● PVC and halogen-free ● Low-temperature-flexible ● Hydrolysis and microbe-resistant



Example image

Part No.	Number of cores	Core design
CF9.XX.16	4x4	
CF9.XX.18	6x3	
CF9.XX.20	5x4	

Part No.	Number of cores	Core design
CF9.XX.25	5x5	
CF9.XX.36	6x6	

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.

chanhvinh.com

Data sheet
chainflex® CF9

Control cable (Class 7.6.4.2) ● For heaviest duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● PVC and halogen-free ● Low-temperature-flexible ● Hydrolysis and microbe-resistant



Example image

Colour code in accordance with DIN 47100.

Conductor no.	Colours according to DIN ISO 47100
1	white
2	brown
3	green
4	yellow
5	grey
6	pink
7	blue
8	red
9	black
10	violet
11	grey-pink
12	red-blue
13	white-green
14	brown-green
15	white-yellow
16	brown-yellow
17	white-grey
18	brown-grey
19	white-pink
20	white-brown
21	white-blue

Conductor no.	Colours according to DIN ISO 47100
22	brown-blue
23	white-red
24	brown-red
25	white-black
26	brown-black
27	grey-green
28	yellow-grey
29	pink-green
30	yellow-pink
31	green-blue
32	yellow-blue
33	green-red
34	yellow-red
35	green-black
36	yellow-black
37	grey-blue
38	pink-blue
39	grey-red
40	pink-red
41	grey-black
42	pink-black

Conductor no.	Colours according to DIN ISO 47100
43	blue-black
44	red-black
45	white-brown-black
46	yellow-green-black
47	grey-pink-black
48	red-blue-black
49	white-green-black
50	brown-green-black
51	white-yellow-black
52	yellow-brown-black
53	white-grey-black
54	grey-brown-black
55	white-pink-black
56	pink-brown-black
57	white-blue-black
58	brown-blue-black
59	white-red-black
60	brown-red-black
61	black-white

© igus® GmbH. Subject to misprints and errors. Technical modifications are possible at any time. Maybe older batches do not have all or other features. Please refer regarding the availability of the items especially the information in the latest chainflex® catalogue.