chanhvinh.com

MOSFET

OptiMOS™-T2 Power Transistor, 40 V

PG-TDSON-8-4



Features

· Dual N-channel, logic level
· Fast switching MOSFETs for SMPS
· Optimized technology for Synchronous Rectification
· Pb-free plating; RoHS compliant
· 100% Avalanche tested
· Halogen-free according to IEC61249-2-21
· Superior thermal resistance

Product Validation
Qualified for industrial applications according to the relevant tests of JEDEC47/20/22




Table 1 Key Performance Parameters

Parameter	Value	Unit
V_{DS}	40	V
$R_{DS(on),max}$	7.2	mΩ
I_D	20	A

Type / Ordering Code	Package	Marking	Related Links
BSC072N04LD	SSO8 dual (TDSON-8-4)	072N04LD	-

chanhvinh.com

Table of Contents

Description 1
Maximum ratings 3
Thermal characteristics 3
Electrical characteristics 3
Electrical characteristics diagrams 5
Package Outlines 9
Revision History 10
Trademarks 10
Disclaimer 10

chanhvinh.com

chanhvinh.com

1 Maximum ratings

at T_A=25 °C, unless otherwise specified, one transistor active

Table 2 Maximum ratings

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Continuous drain current	I_D	-	-	20	A	V_{GS}=10 V, T_C=25 °C
Pulsed drain current[1]	$I_{D,pulse}$	-	-	80	A	T_A=25 °C
Avalanche energy, single pulse[2]	E_{AS}	-	-	87	mJ	I_D=10 A, R_{GS}=25 Ω
Gate source voltage	V_{GS}	-16	-	16	V	-
Power dissipation	P_{tot}	-	-	65	W	T_C=25 °C
Operating and storage temperature	T_j, T_{stg}	-55	-	175	°C	IEC climatic category; DIN IEC 68-1: 55/175/56

2 Thermal characteristics

Table 3 Thermal characteristics

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Thermal resistance, junction - case, bottom	R_{thJC}	-	-	2.3	°C/W	-
Device on PCB, 6 cm² cooling area[3]	R_{thJA}	-	-	60	°C/W	-
Device on PCB, minimal footprint[4]	R_{thJA}	-	-	100	°C/W	-

3 Electrical characteristics

at T_j=25 °C, unless otherwise specified

Table 4 Static characteristics

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Drain-source breakdown voltage	$V_{(BR)DSS}$	40	-	-	V	V_{GS}=0 V, I_D=1 mA
Gate threshold voltage	$V_{GS(th)}$	1.2	1.7	2.2	V	V_{DS}=V_{GS}, I_D=30 µA
Zero gate voltage drain current	I_{DSS}	- -	0.1 10	1 100	µA	V_{DS}=40 V, V_{GS}=0 V, T_j=25 °C V_{DS}=40 V, V_{GS}=0 V, T_j=125 °C
Gate-source leakage current	I_{GSS}	-	-	100	nA	V_{GS}=20 V, V_{DS}=0 V
Drain-source on-state resistance	$R_{DS(on)}$	- -	6.5 8.0	7.2 9.2	mΩ	V_{GS}=10 V, I_D=17 A V_{GS}=4.5 V, I_D=10 A

[1] See Diagram 3 for more detailed information
[2] See Diagram 13 for more detailed information
[3] Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm² (one layer, 70 µm thick) copper area for drain connection. PCB is vertical in still air.
[4] device mounted on a minimum pad (one layer, 70 µm thick)

chanhvinh.com

Table 5 Dynamic characteristics

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Input capacitance[1)]	C_{iss}	-	3070	3990	pF	V_{GS}=0 V, V_{DS}=20 V, f=1 MHz
Output capacitance[1)]	C_{oss}	-	680	880	pF	V_{GS}=0 V, V_{DS}=20 V, f=1 MHz
Reverse transfer capacitance[1)]	C_{rss}	-	36	72	pF	V_{GS}=0 V, V_{DS}=20 V, f=1 MHz
Turn-on delay time	$t_{d(on)}$	-	9	-	ns	V_{DD}=20 V, V_{GS}=10 V, I_D=20 A, $R_{G,ext}$=11 Ω
Rise time	t_r	-	4	-	ns	V_{DD}=20 V, V_{GS}=10 V, I_D=20 A, $R_{G,ext}$=11 Ω
Turn-off delay time	$t_{d(off)}$	-	50	-	ns	V_{DD}=20 V, V_{GS}=10 V, I_D=20 A, $R_{G,ext}$=11 Ω
Fall time	t_f	-	25	-	ns	V_{DD}=20 V, V_{GS}=10 V, I_D=20 A, $R_{G,ext}$=11 Ω

Table 6 Gate charge characteristics[2)]

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Gate to source charge	Q_{gs}	-	9	13	nC	V_{DD}=20 V, I_D=20 A, V_{GS}=0 to 10 V
Gate to drain charge	Q_{gd}	-	4.1	8.2	nC	V_{DD}=20 V, I_D=20 A, V_{GS}=0 to 10 V
Gate charge total[1)]	Q_g	-	39	52	nC	V_{DD}=20 V, I_D=20 A, V_{GS}=0 to 10 V
Gate plateau voltage	$V_{plateau}$	-	3.1	-	V	V_{DD}=20 V, I_D=20 A, V_{GS}=0 to 10 V

Table 7 Reverse diode


Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Diode continuous forward current	I_S	-	-	20	A	T_C=25 °C
Diode pulse current	$I_{S,pulse}$	-	-	80	A	T_C=25 °C
Diode forward voltage	V_{SD}	-	0.85	1.1	V	V_{GS}=0 V, I_F=17 A, T_j=25 °C
Reverse recovery time[1)]	t_{rr}	-	35	-	ns	V_R=15 V, I_F=9 A, di_F/dt=100 A/µs
Reverse recovery charge[1)]	Q_{rr}	-	35	-	nC	V_R=15 V, I_F=9 A, di_F/dt=100 A/µs

[1)] Defined by design. Not subject to production test.
[2)] See ″Gate charge waveforms″ for parameter definition

chanhvinh.com


4 Electrical characteristics diagrams

Diagram 1: Power dissipation

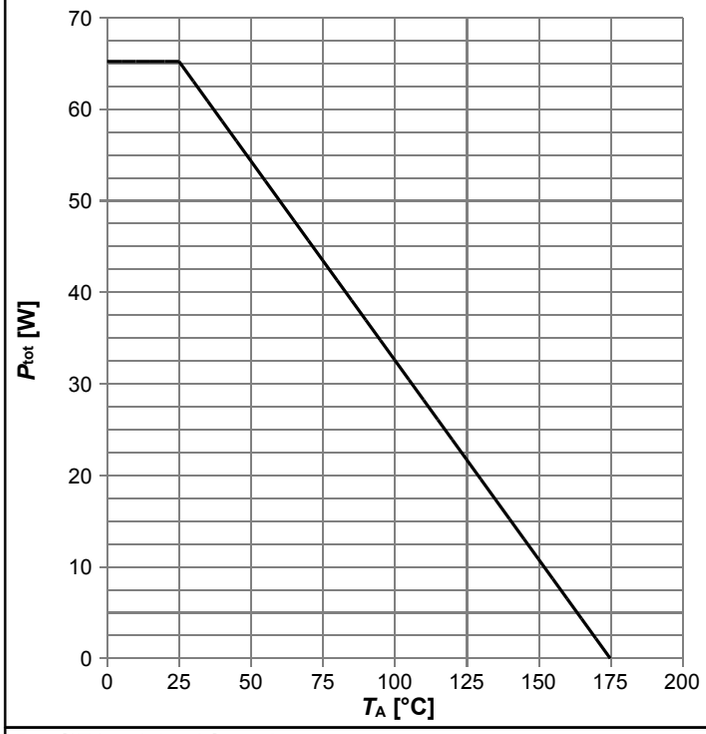


P_{tot}=f(T_A), minimal footprint

Diagram 2: Drain current

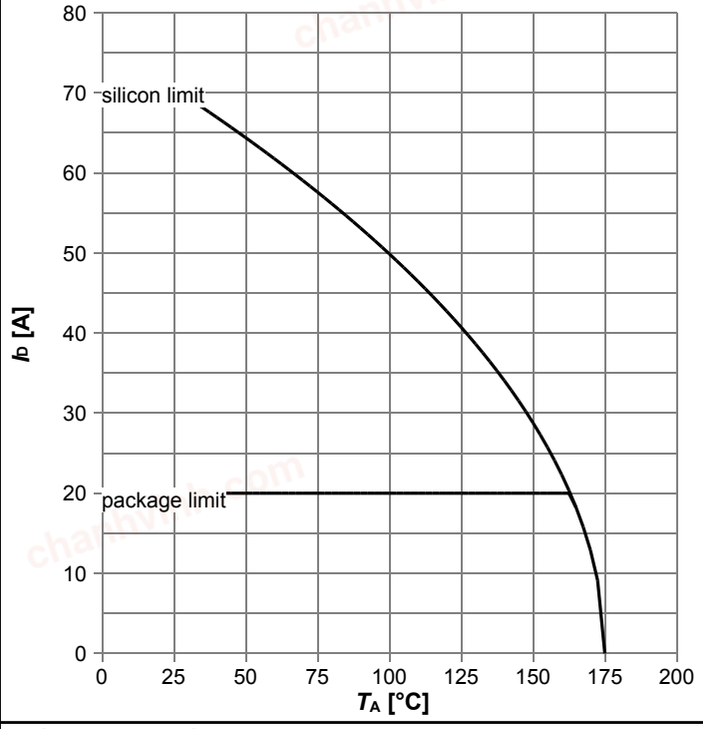


I_D=f(T_A); minimal footprint

Diagram 3: Safe operating area

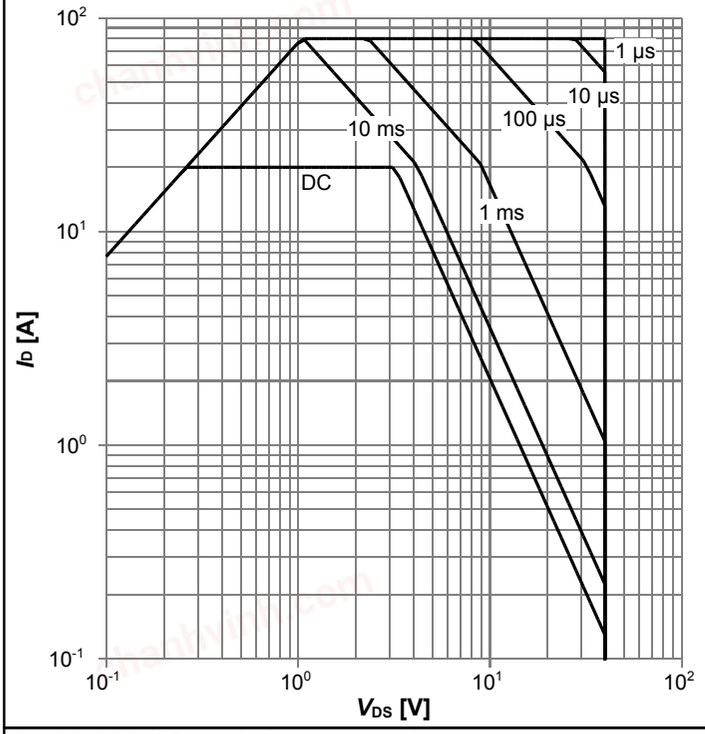

I_D=f(V_{DS}); T_C=25 °C; D=0; parameter: t_p


Diagram 4: Max. transient thermal impedance

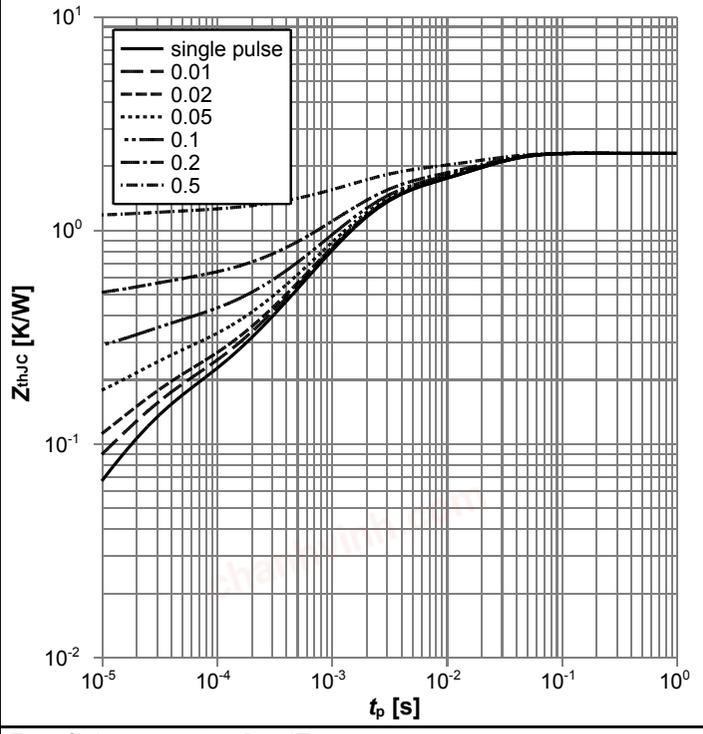

Z_{thJC}=f(t_p); parameter: D=t_p/T


chanhvinh.com

Diagram 5: Typ. output characteristics

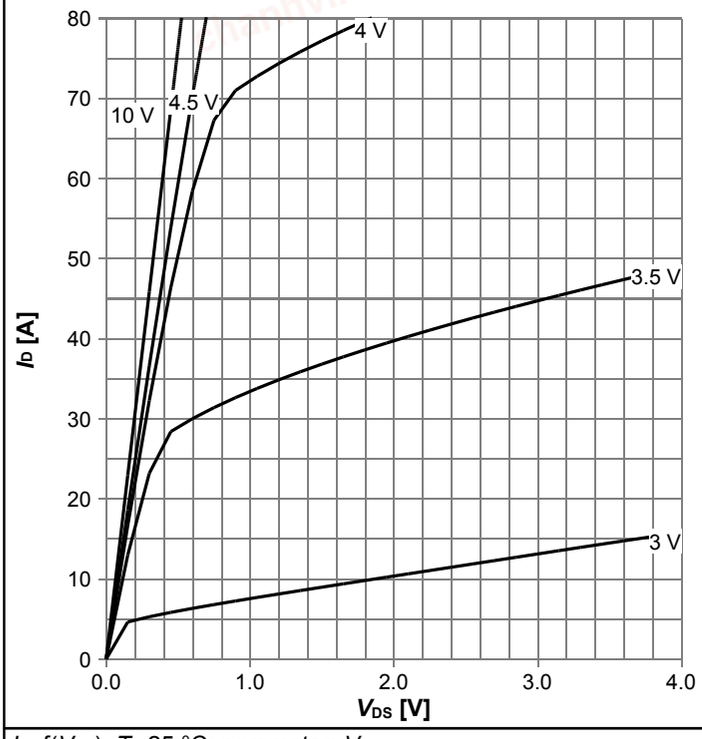


I_D=f(V_{DS}), T_j=25 °C; parameter: V_{GS}

Diagram 6: Typ. drain-source on resistance

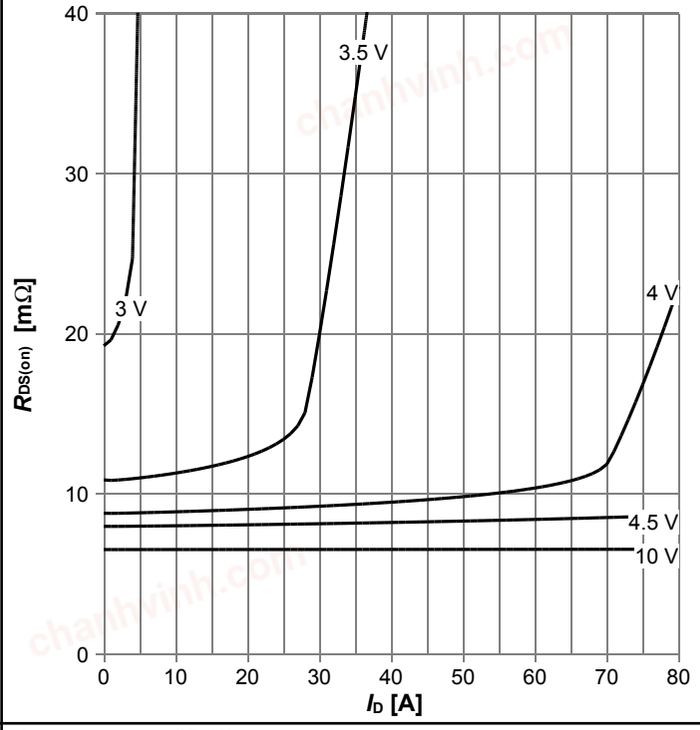


$R_{DS(on)}$=f(I_D), T_j=25 °C; parameter: V_{GS}

Diagram 7: Typ. transfer characteristics

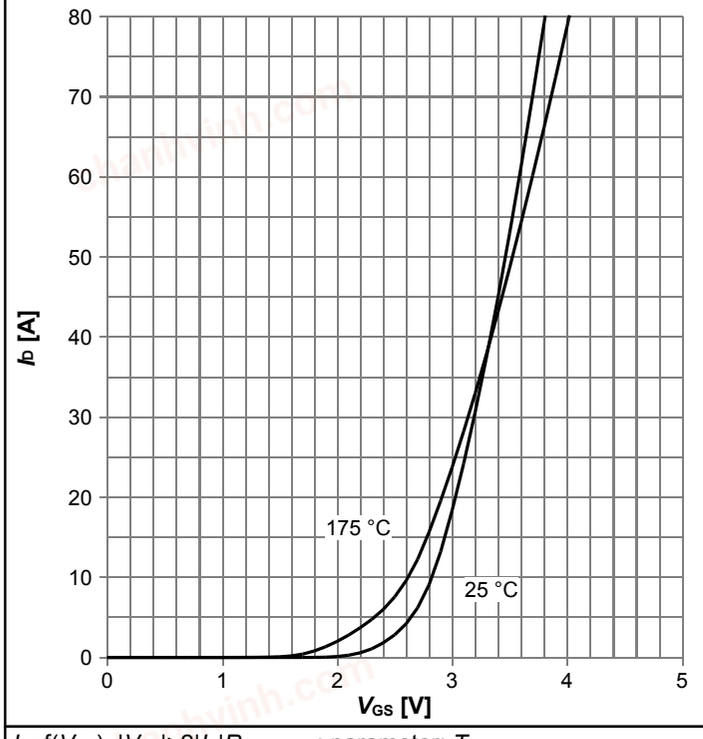

I_D=f(V_{GS}), |V_{DS}|>2|I_D|$R_{DS(on)max}$; parameter: T_j


Diagram 8: Typ. drain-source on resistance

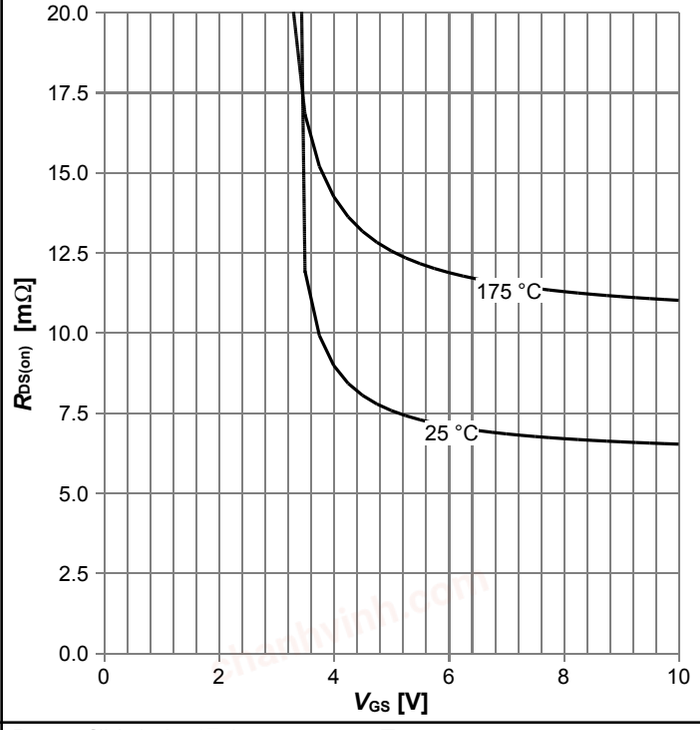

$R_{DS(on)}$=f(V_{GS}), I_D=17 A; parameter: T_j


chanhvinh.com

Diagram 9: Normalized drain-source on resistance

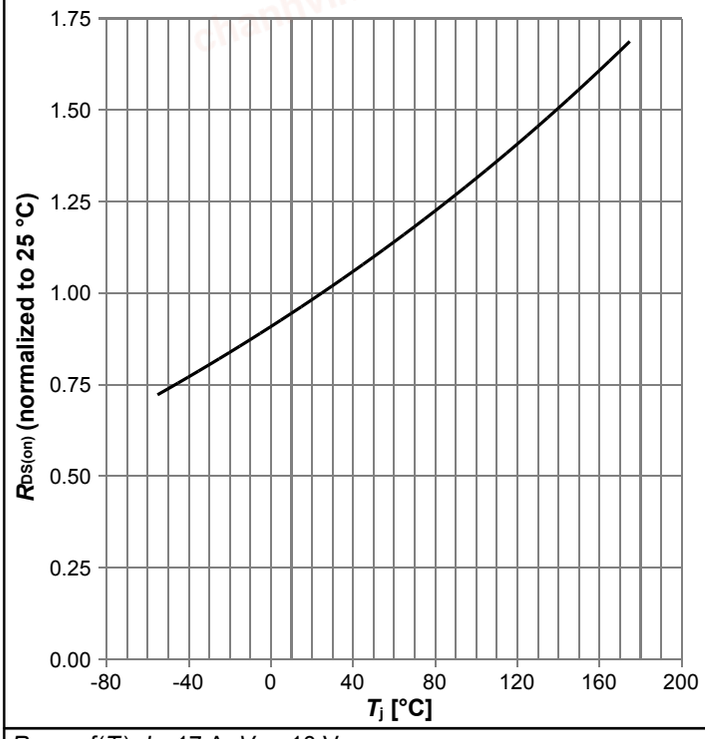


$R_{DS(on)}$=f(T_j), I_D=17 A, V_{GS}=10 V

Diagram 10: Typ. gate threshold voltage

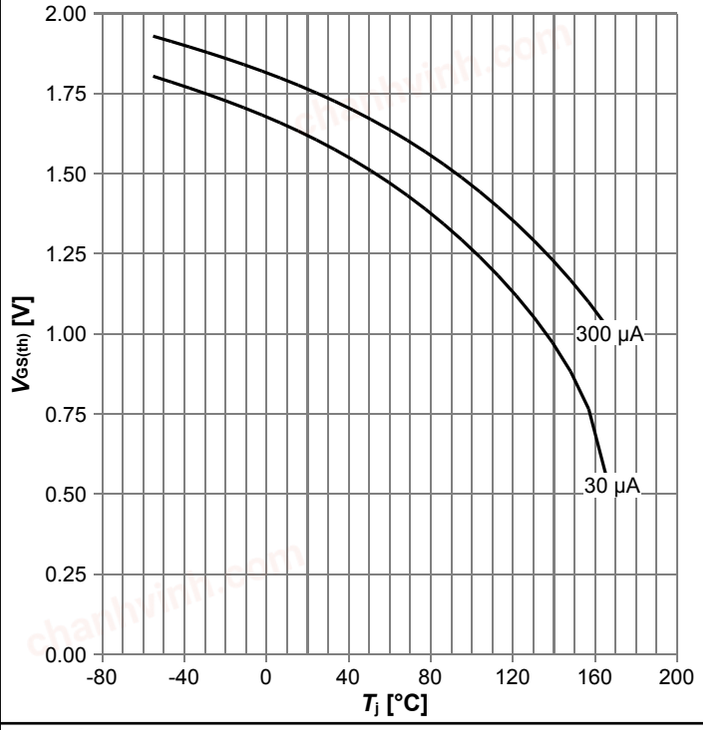


$V_{GS(th}$=f(T_j), V_{GS}=V_{DS}; parameter: I_D

Diagram 11: Typ. capacitances

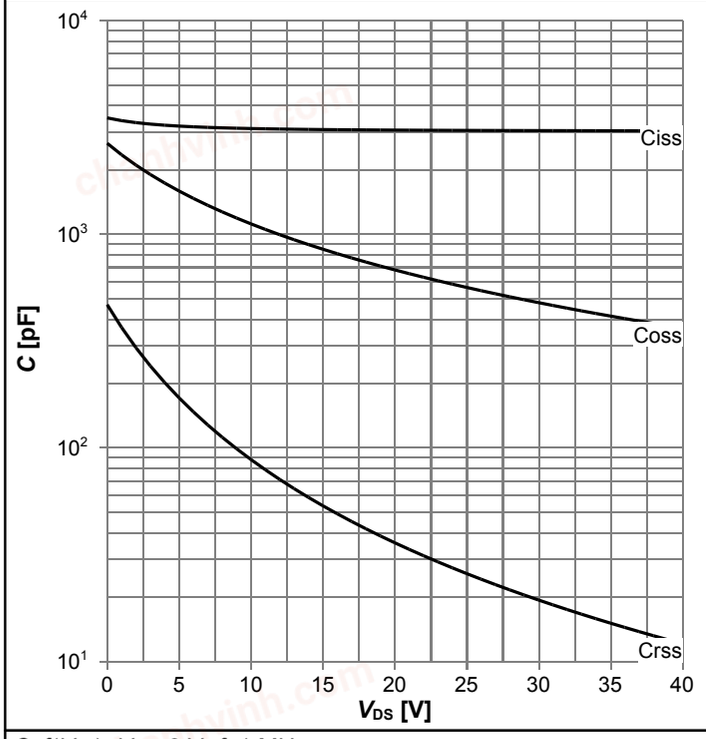

C=f(V_{DS}); V_{GS}=0 V; f=1 MHz


Diagram 12: Forward characteristics of reverse diode

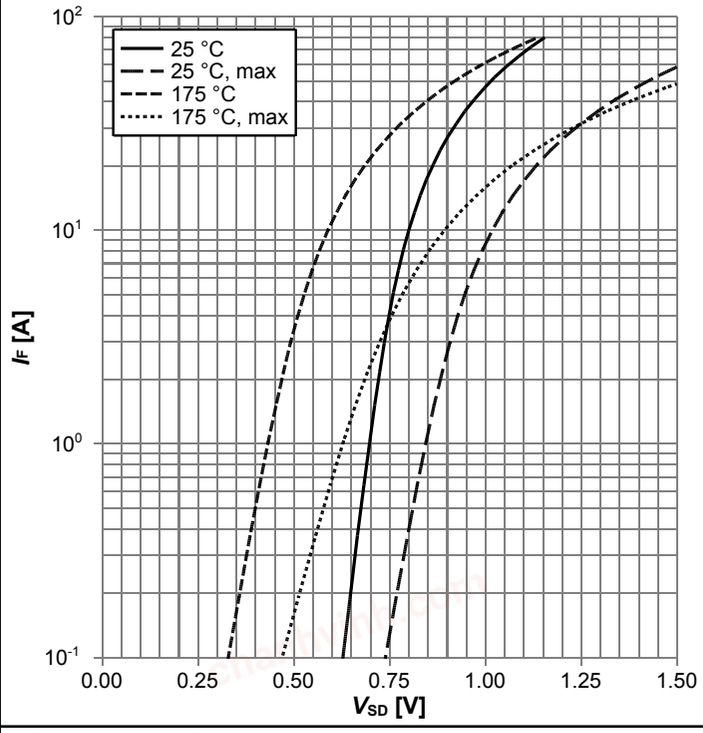

I_F=f(V_{SD}); parameter: T_j


chanhvinh.com

Diagram 13: Avalanche characteristics

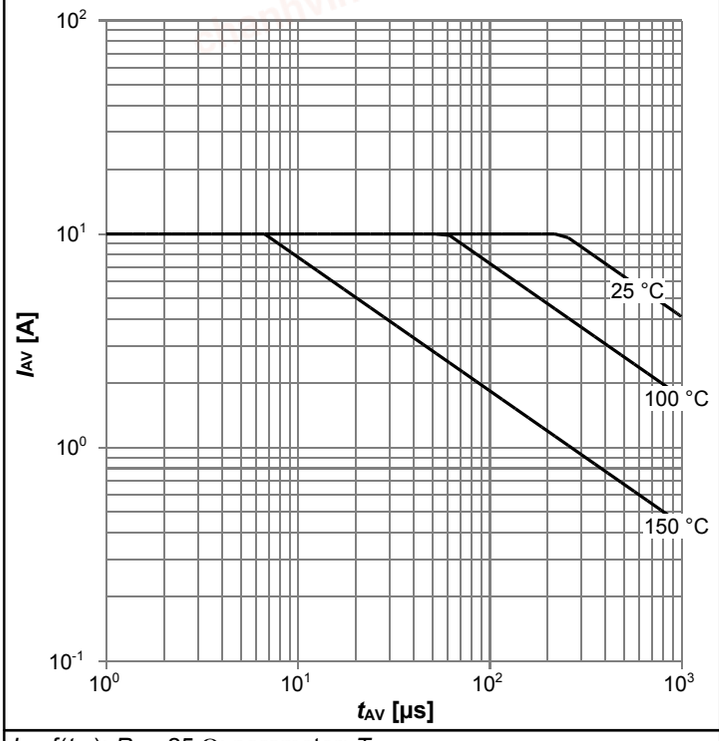


$I_{AS}=f(t_{AV})$; $R_{GS}=25\ \Omega$; parameter: $T_{j,start}$

Diagram 14: Typ. gate charge

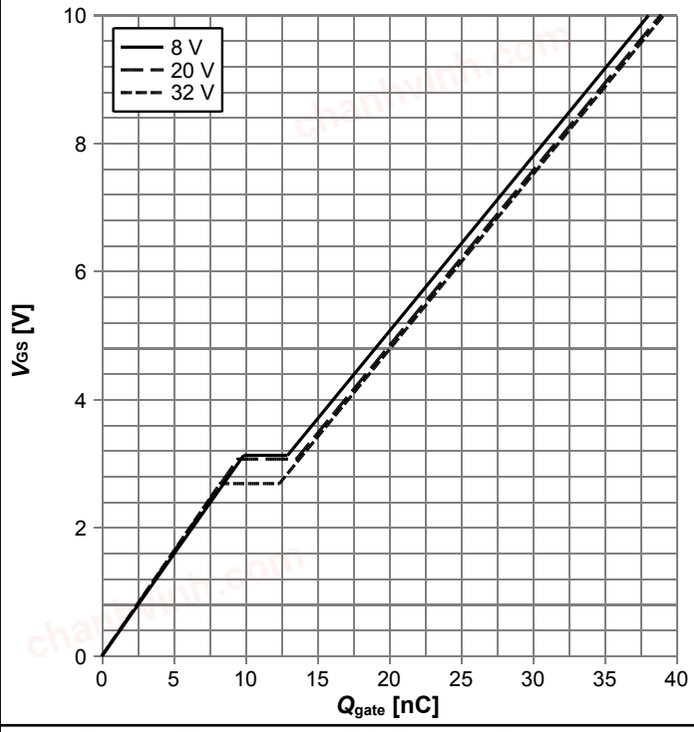


$V_{GS}=f(Q_{gate})$, $I_D=20$ A pulsed, $T_j=25$ °C; parameter: V_{DD}

Diagram 15: Drain-source breakdown voltage

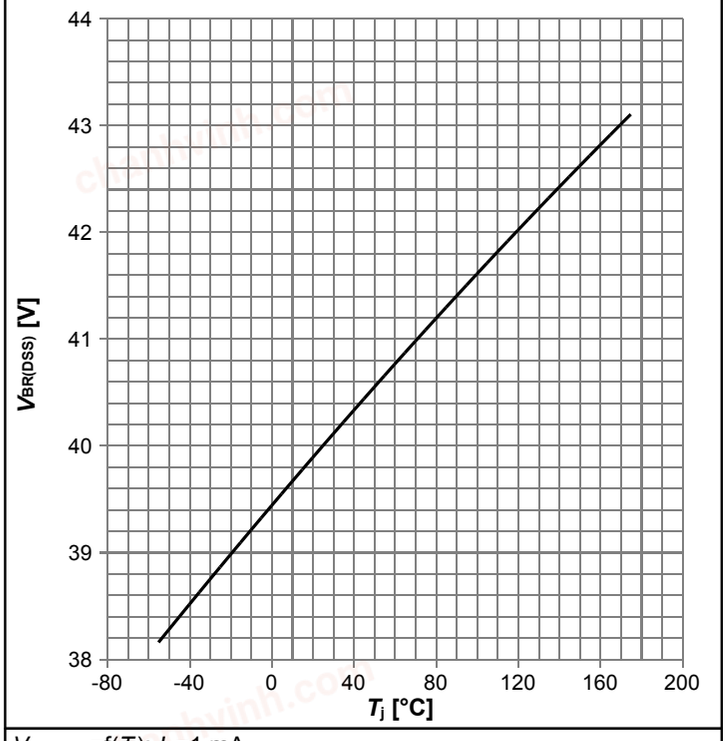


$V_{BR(DSS)}=f(T_j)$; $I_D=1$ mA


Diagram Gate charge waveforms

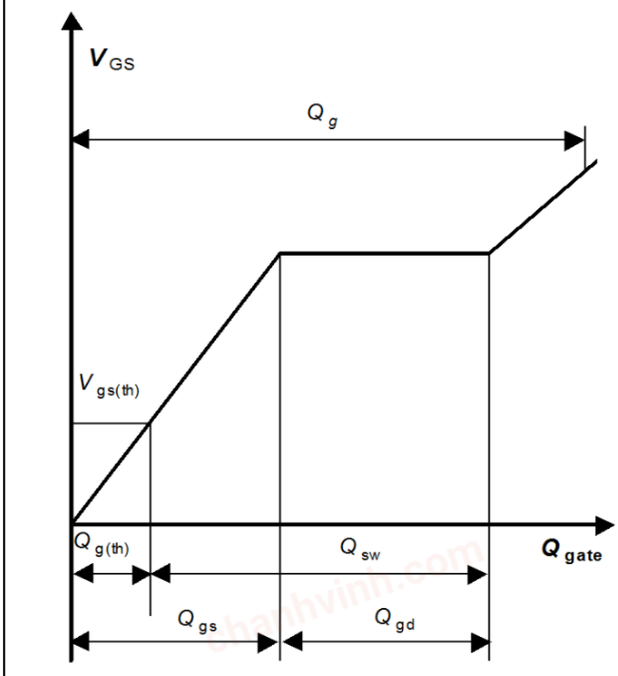

chanhvinh.com

5 Package Outlines

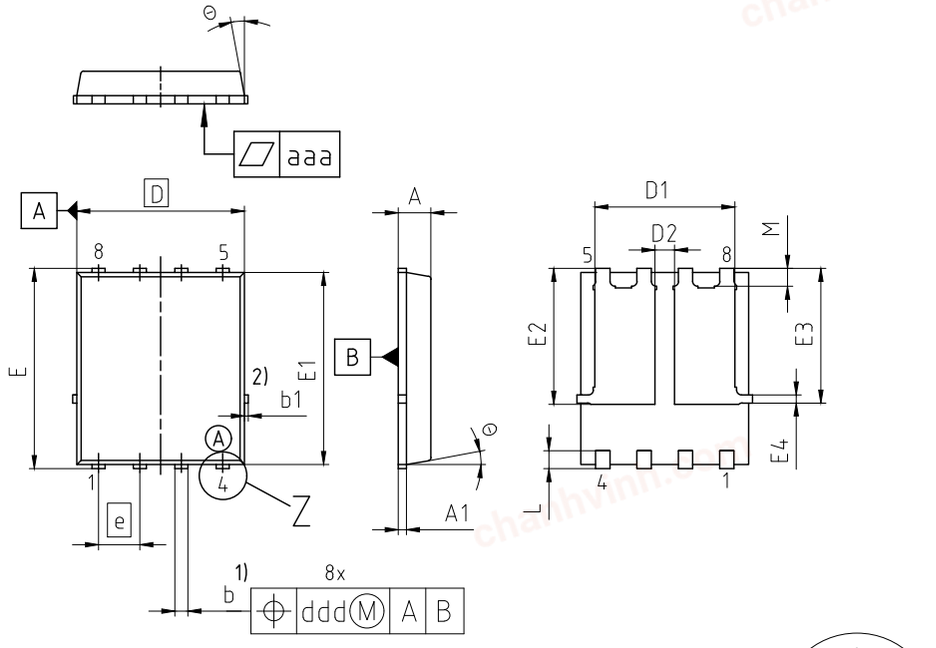

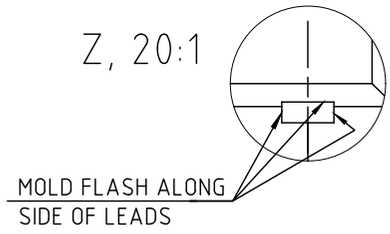

1) EXCLUDE MOLD FLASH

2) REMOVAL ON MOLD GATE, INTRUSION 0.1 mm
PROTRUSION 0.1 mm

ALL METAL SURFACES ARE PLATED EXCEPT AREA OF CUT

DIMENSIONS	MILLIMETERS	
	MIN.	MAX.
A	0.90	1.10
A1	0.15	0.35
b	0.34	0.54
b1	0.02	0.22
D	4.95	5.35
D1	4.20	4.40
D2	0.50	0.70
E	5.95	6.35
E1	5.70	6.10
E2	4.075	4.275
E3	4.035	4.235
E4	0.15	0.35
e	1.27	
L	0.45	0.65
M	0.45	0.65
Θ	8.5°	11.5°
aaa	0.05	
ddd	0.10	

DOCUMENT NO. Z8B00189767
REVISION 01
SCALE 5:1 0 1 2 3 4mm
EUROPEAN PROJECTION
ISSUE DATE 31.07.2018

Figure 1 Outline SSO8 dual (TDSON-8-4), dimensions in mm

chanhvinh.com

Revision History

BSC072N04LD

Revision: 2018-12-11, Rev. 2.0

Previous Revision

Revision	Date	Subjects (major changes since last revision)
2.0	2018-12-11	Release of final version

Trademarks
All referenced product or service names and trademarks are the property of their respective owners.

We Listen to Your Comments
Any information within this document that you feel is wrong, unclear or missing at all? Your feedback will help us to continuously improve the quality of this document. Please send your proposal (including a reference to this document) to:
erratum@infineon.com

Published by
Infineon Technologies AG
81726 München, Germany
© 2018 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer
The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics (“Beschaffenheitsgarantie”) .

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.
In addition, any information given in this document is subject to customer’s compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer’s products and any use of the product of Infineon Technologies in customer’s applications.
The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer’s technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

Information
For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (**www.infineon.com**).

Warnings
Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.
The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support, automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.