chanhvinh.com

OptiMOS™ 2 + OptiMOS™P 2 Small Signal Transistor

Features

· Complementary P + N channel

· Enhancement mode

· Super Logic level (2.5V rated)

· Common drain

· Avalanche rated

· 175 °C operating temperature


· Qualified according to AEC Q101

· 100% lead-free; RoHS compliant


· Halogen-free according to IEC61246-21

Product Summary

		P	N	
V_{DS}		-20	20	V
$R_{DS(on),max}$	V_{GS}=±4.5 V	150	55	mΩ
	V_{GS}=±2.5 V	310	95	
I_D		-3.2	5.1	A

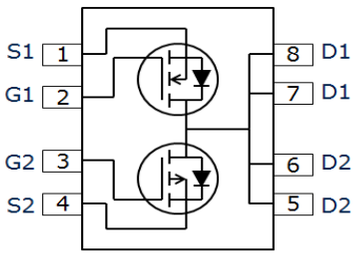

PG-TSDSON-8



Type	Package	Marking	Lead Free	Halogen Free	Packing
BSZ15DC02KD H	PG-TSDSON-8	15DC02K	Yes	Yes	Non dry

Maximum ratings, at T_A=25 °C, unless otherwise specified [1)]

Parameter	Symbol	Conditions	Value		Unit
			P	N	
Continuous drain current	I_D	T_A=25 °C	-3.2	5.1	A
		T_A=100 °C	-2.2	3.6	
Pulsed drain current	$I_{D,pulse}$	T_A=25 °C	-13	20	
Avalanche energy, single pulse	E_{AS}	P: I_D=-3.2 A, N: I_D=5.1 A, R_{GS}=25 Ω	11	11	mJ
Gate source voltage	V_{GS}		±12		V
Power dissipation	P_{tot} [2)]	T_A=25 °C	2.5		W
Operating and storage temperature	T_j, T_{stg}		-55 ... 175		°C
ESD class		JESD22-A114-HBM	0 (<250V)		
Soldering temperature	T_{solder}		260		°C
IEC climatic category; DIN IEC 68-1			55/175/56		

[1)] Remark: only one of both transistors active

Downloaded from Arrow.com.

chanhvinh.com

Parameter		Symbol	Conditions	Values			Unit
				min.	typ.	max.	
Thermal characteristics							
Thermal resistance, junction - case	P	R_{thJC}		-	-	8	K/W
	N						
Device on PCB		R_{thJA}	6 cm^2 cooling area[2)]	-	-	60	K/W
Electrical characteristics, at T_j=25 °C, unless otherwise specified							
Static characteristics							
Drain-source breakdown voltage	P	$V_{(BR)DSS}$	V_{GS}=0 V, I_D=-250 µA	-	-	-20	V
	N		V_{GS}=0 V, I_D=250 µA	20	-	-	
Gate threshold voltage	P	$V_{GS(th)}$	V_{DS}=V_{GS}, I_D=-110 µA	-1.4	-1.0	-0.7	
	N		V_{DS}=V_{GS}, I_D=110 µA	0.8	1.1	1.4	
Zero gate voltage drain current	P	I_{DSS}	V_{DS}=-20 V, V_{GS}=0 V, T_j=25 °C	-	-	-0.1	µA
	N		V_{DS}=20 V, V_{GS}=0 V, T_j=25 °C	-	-	0.1	
	P		V_{DS}=-20 V, V_{GS}=0 V, T_j=175 °C	-	-	-50	
	N		V_{DS}=20 V, V_{GS}=0 V, T_j=175 °C	-	-	50	
Gate-source leakage current	P	I_{GSS}	V_{GS}=±12 V, V_{DS}=0 V	-	-	±100	nA
	N						
Drain-source on-state resistance	P	$R_{DS(on)}$	V_{GS}=-2.5 V, I_D=2.1 A	-	164	310	mΩ
	N		V_{GS}=2.5 V, I_D=1.9 A	-	63	95	
	P		V_{GS}=-4.5 V, I_D=-3.2 A	-	97	150	
	N		V_{GS}=4.5 V, I_D=5.1 A	-	41	55	
Transconductance	P	g_{fs}	$\|V_{DS}\|>2\|I_D\|R_{DS(on)max}$, I_D=-2.2 A	3.4	6.9	-	S
	N		$\|V_{DS}\|>2\|I_D\|R_{DS(on)max}$, I_D=3.6 A	5.5	11	-	

[2)] Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm2 (one layer, 70 µm thick) copper area for drain connection. PCB is vertical in still air.

Downloaded from Arrow.com.

chanhvinh.com

Parameter		Symbol	Conditions	Values			Unit
				min.	typ.	max.	
Dynamic characteristics							
Input capacitance	P	C_{iss}	V_{GS}=0 V, P: V_{DS}=-10 V, N: V_{DS}= 10 V, f=1 MHz	-	270	360	pF
	N			-	315	419	
Output capacitance	P	C_{oss}		-	110	150	
	N			-	114	152	
Reverse transfer capacitance	P	C_{rss}		-	94	140	
	N			-	16	24	
Turn-on delay time	P	$t_{d(on)}$	P: V_{DD}=-10 V, V_{GS}=-4.5 V, R_G=6 Ω, I_D=-3.2 A N: V_{DD}=10 V, V_{GS}=4.5 V, R_G=6 Ω, I_D=5.1 A	-	7.4	-	ns
	N			-	4.9	-	
Rise time	P	t_r		-	3.7	-	
	N			-	2.0	-	
Turn-off delay time	P	$t_{d(off)}$		-	11.3	-	
	N			-	12.2	-	
Fall time	P	t_f		-	4.7	-	
	N			-	1.4	-	
Gate Charge Characteristics							
Gate to source charge	P	Q_{gs}	V_{DD}=-10 V, I_D=-3.2 A, V_{GS}=0 to -4.5 V	-	-0.59	-0.8	nC
Gate to drain charge		Q_{gd}		-	-1.4	-1.8	
Switching charge		Q_g		-	-3.0	-4.5	
Gate plateau voltage		$V_{plateau}$		-	-2.2	-	
Gate to source charge	N	Q_{gs}	V_{DD}=10 V, I_D=5.1 A, V_{GS}=0 to 4.5 V	-	0.7	1.0	
Gate to drain charge		Q_{gd}		-	0.4	-	
Switching charge		Q_g			2.1	2.8	
Gate plateau voltage		$V_{plateau}$			2.3		

Downloaded from Arrow.com.

chanhvinh.com


Parameter		Symbol	Conditions	Values			Unit
				min.	typ.	max.	
Reverse Diode							
Diode continuous forward current	P	I_S	T_C=25 °C	-	-	-2.1	A
	N					2.3	
Diode pulse current	P	$I_{S,pulse}$		-	-	-13	
	N					20	
Diode forward voltage	P	V_{SD}	V_{GS}=0 V, I_F=3.2 A, T_j=25 °C	-	-0.98	-1.2	V
	N		V_{GS}=0 V, I_F=5.1 A, T_j=25 °C	-	0.9	1.2	
Reverse recovery time	P	t_{rr}	V_R=±10 V, I_F=I_S, di_F/dt=100 A/µs		12.2		ns
	N			-	10.9	-	
Reverse recovery charge	P	Q_{rr}			4.6		nC
	N			-	3.4	-	

Downloaded from Arrow.com.

chanhvinh.com


1 Power dissipation (P)

$P_{tot}=f(T_A)$

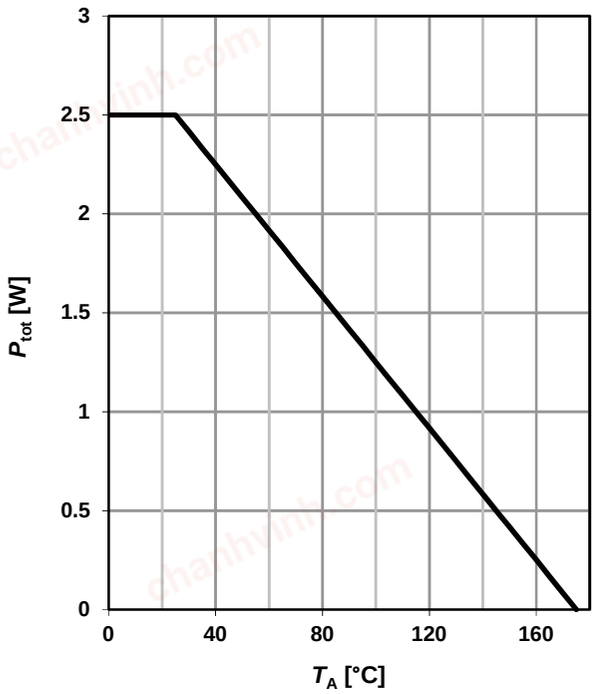

2 Power dissipation (N)


$P_{tot}=f(T_A)$

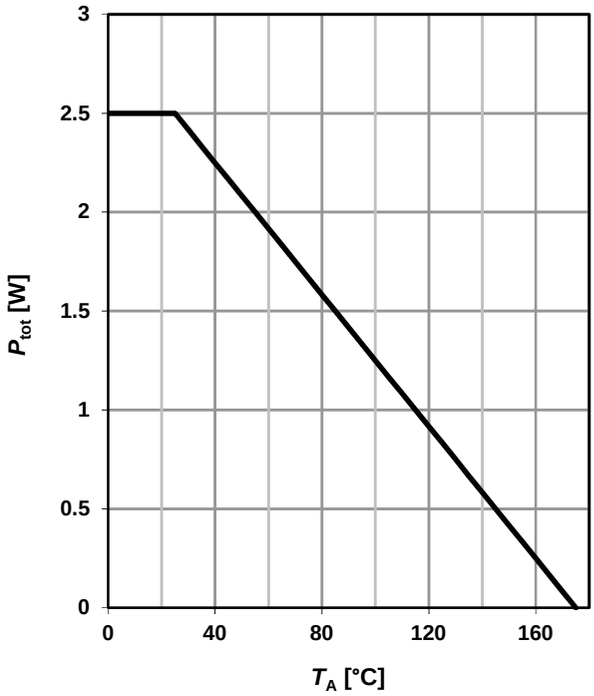

3 Drain current (P)

$I_D=f(T_A)$


parameter: V_{GS}≤-4.5 V

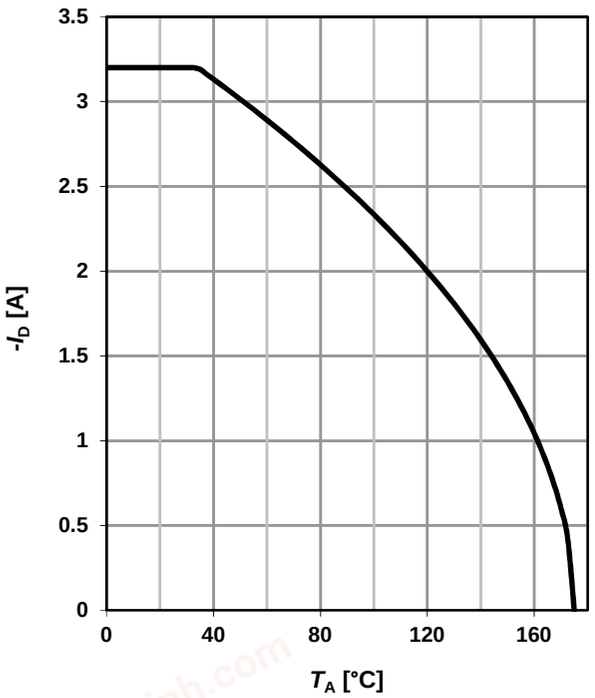

4 Drain current (N)

$I_D=f(T_A)$

parameter: V_{GS}≥4.5 V

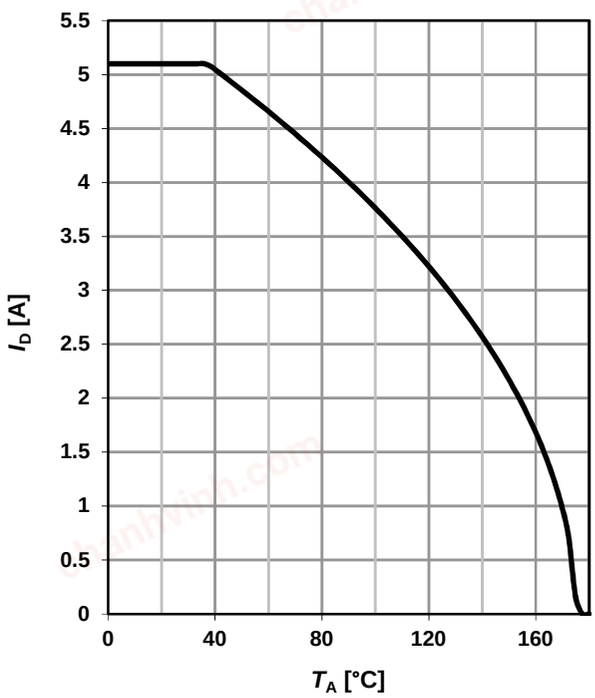


Downloaded from Arrow.com.

chanhvinh.com

6 Safe operating area (P)

I_D=f(V_{DS}); T_A=25 °C; D=0


parameter: t_p

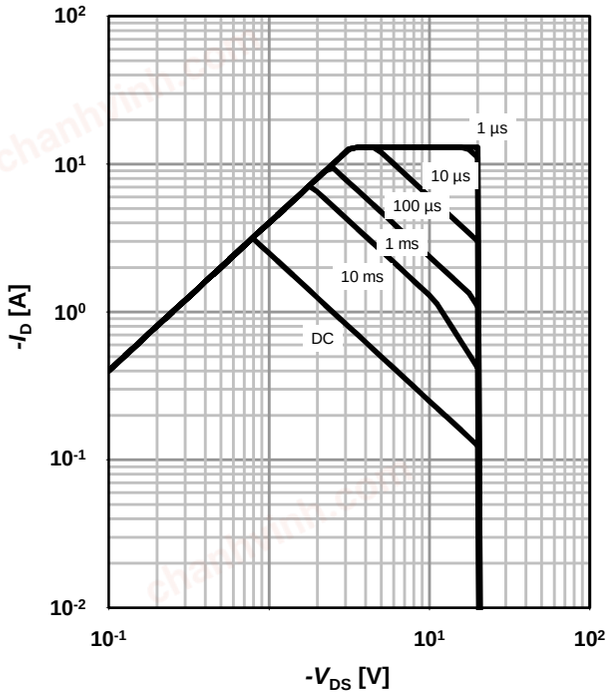

6 Safe operating area (N)

I_D=f(V_{DS}); T_A=25 °C; D=0


parameter: t_p

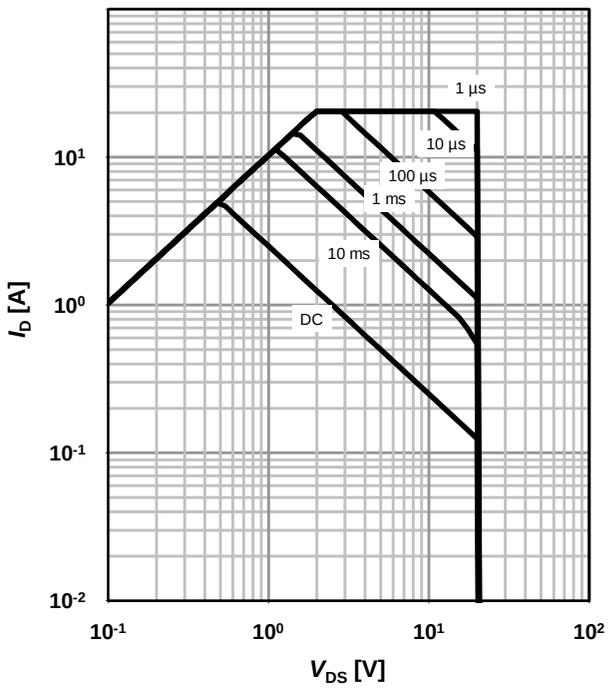

7 Max. transient thermal impedance (P)

Z_{thJA}=f(t_p)


parameter: $D=t_p/T$

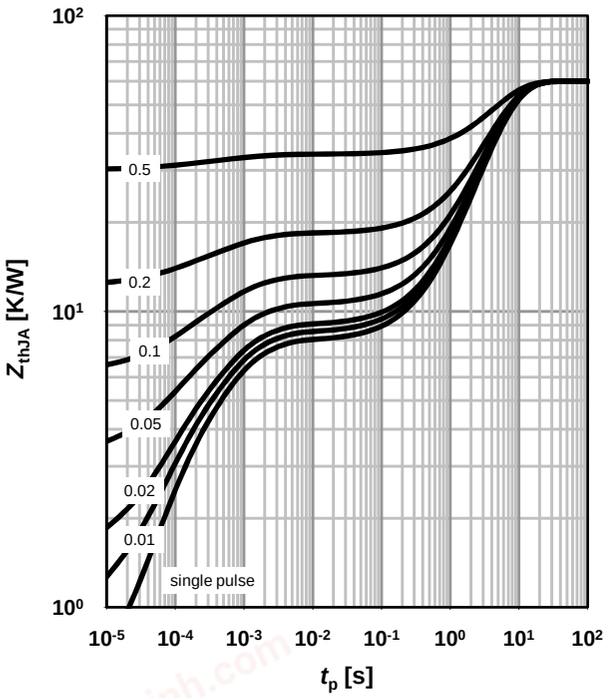

8 Max. transient thermal impedance (N)

Z_{thJA}=f(t_p)

parameter: $D=t_p/T$

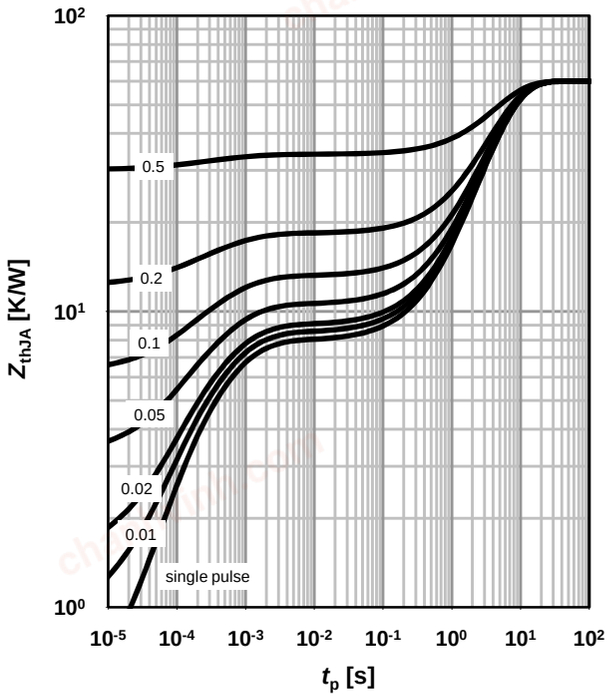


Downloaded from Arrow.com.

chanhvinh.com

10 Typ. Output characteristics (P)

I_D=f(V_{DS}); T_j=25 °C


parameter: V_{GS}

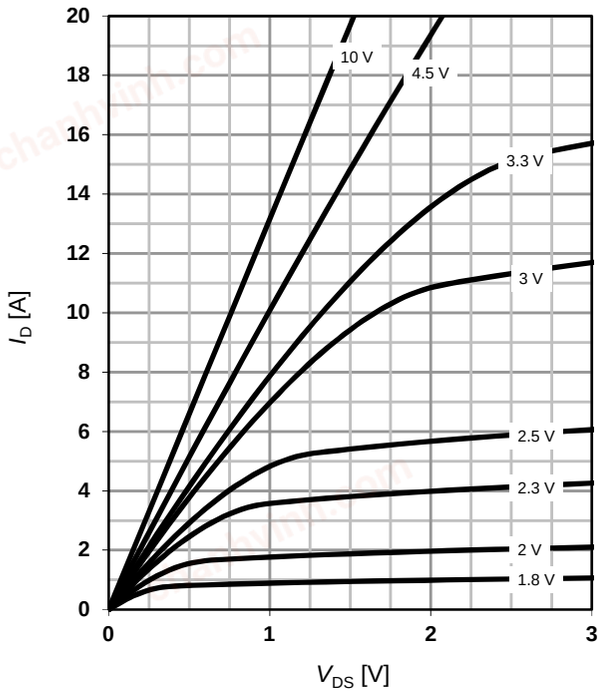

10 Typ. output characteristics (N)

I_D=f(V_{DS}); T_j=25 °C


parameter: V_{GS}

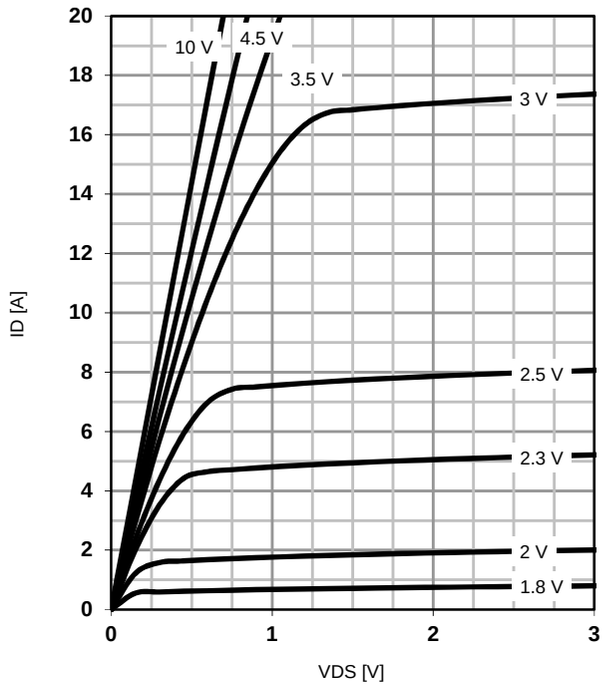

11 Typ. drain-source on resistance (P)

$R_{DS(on)}$=f(I_D); T_j=25 °C


parameter: V_{GS}

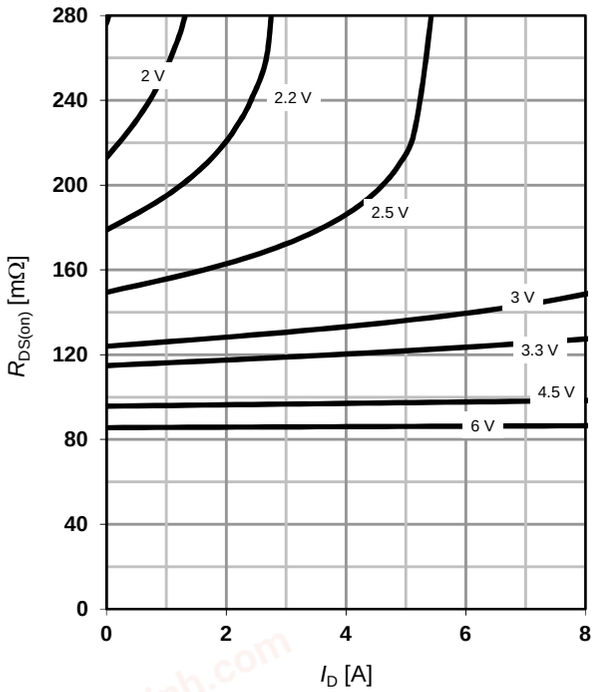

12 Typ. drain-source on resistance (N)

$R_{DS(on)}$=f(I_D); T_j=25 °C

parameter: V_{GS}

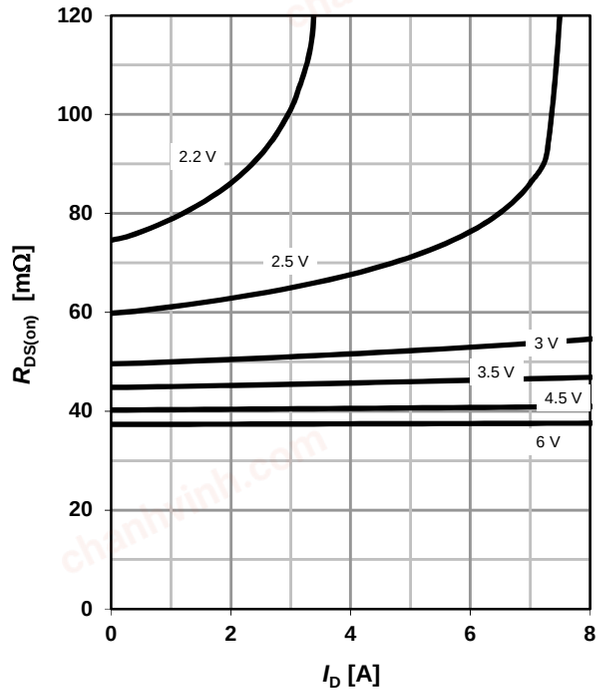


Downloaded from Arrow.com.

chanhvinh.com

14 Typ. Transfer characteristics (P)

$I_D=f(V_{GS})$; $|V_{DS}|>2 | I_D| R_{DS(on)max}$


parameter: T_j

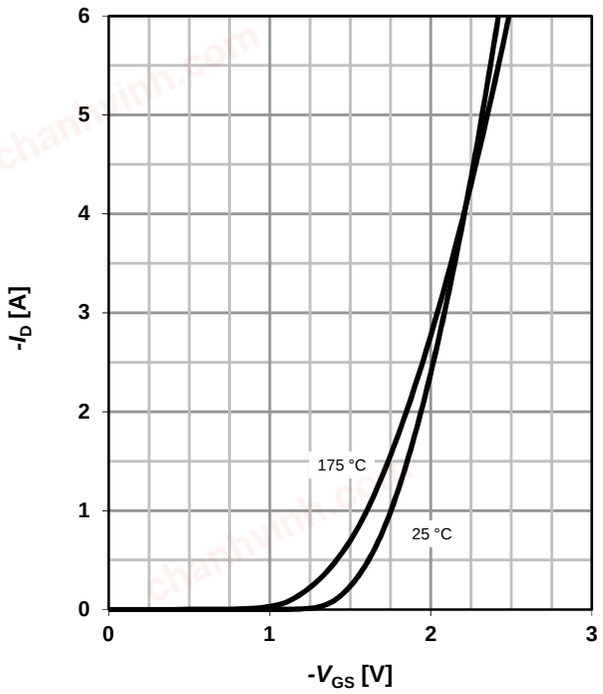

14 Typ. transfer characteristics (N)


$I_D=f(V_{GS})$; $|V_{DS}|>2 | I_D | R_{DS(on)max}$

parameter: T_j

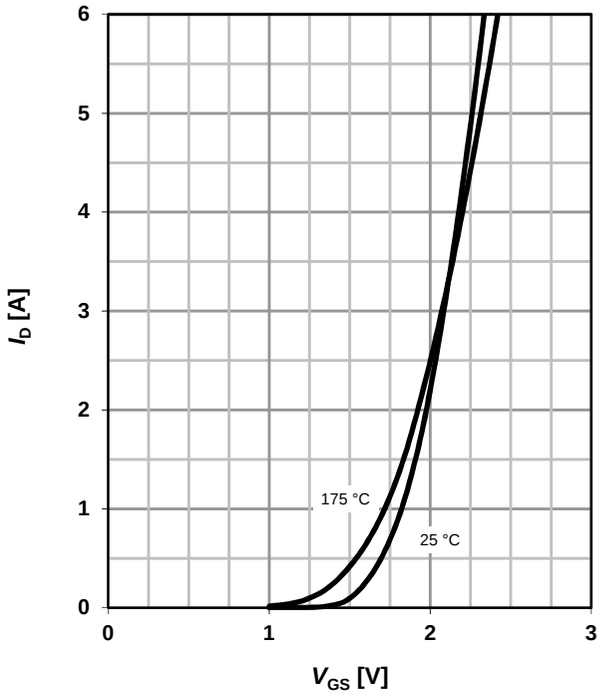


15 Drain-source on-state resistance (P)

$R_{DS(on)}=f(T_j)$; I_D=-3.2 A; V_{GS}=-4.5 V

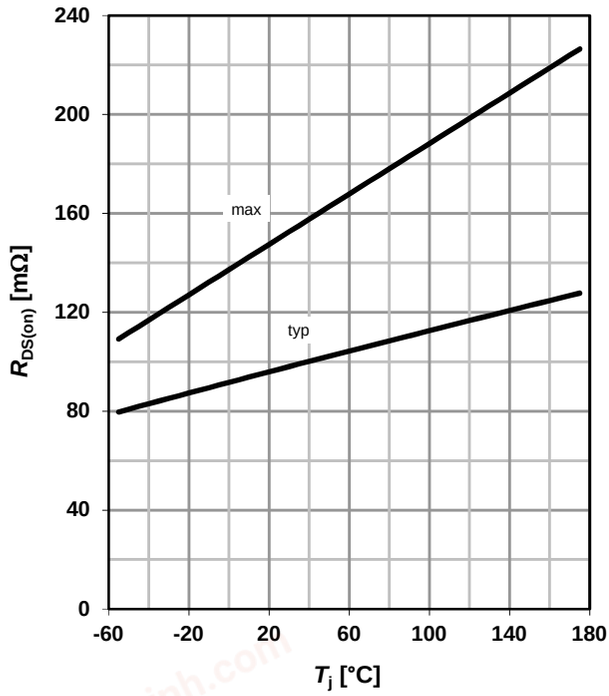

16 Drain-source on-state resistance (N)

$R_{DS(on)}=f(T_j)$; I_D=5.1A; V_{GS}=4.5 V

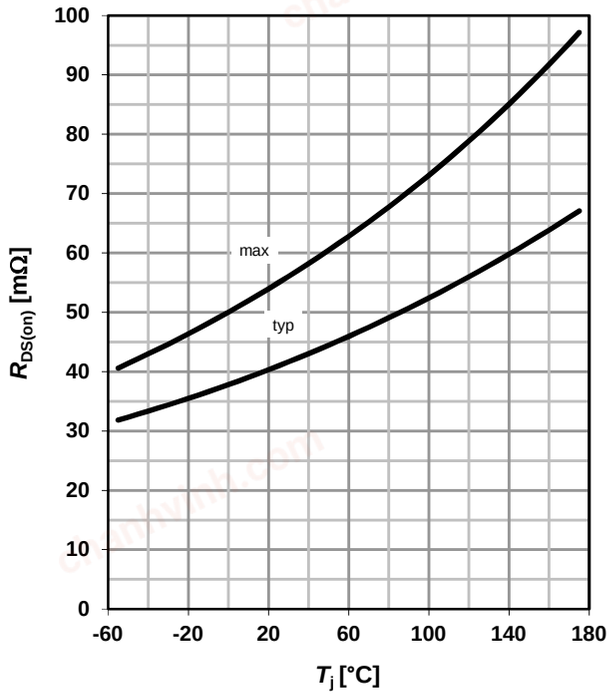


Downloaded from Arrow.com.

chanhvinh.com


18 Typ. gate threshold voltage (P)

$V_{GS(th)}=f(T_j)$; $V_{GS}=V_{DS}$; I_D=-110 µA

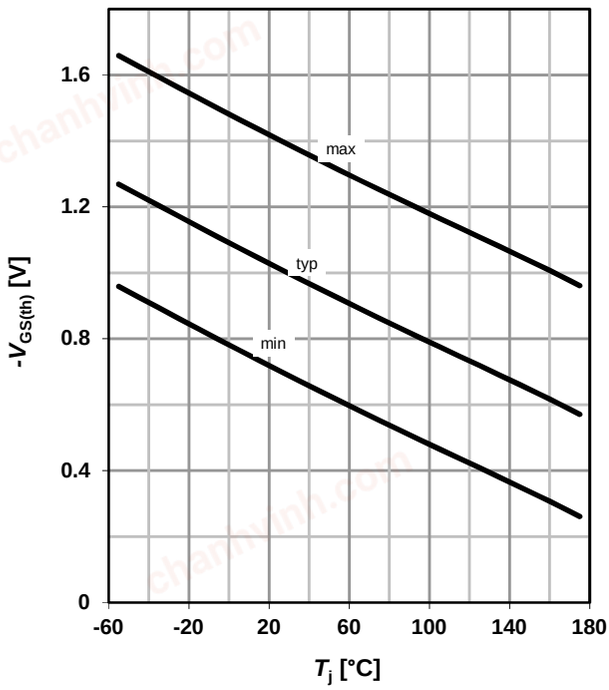


18 Typ. gate threshold voltage (N)

$V_{GS(th)}=f(T_j)$; $V_{GS}=V_{DS}$; I_D=110 µA

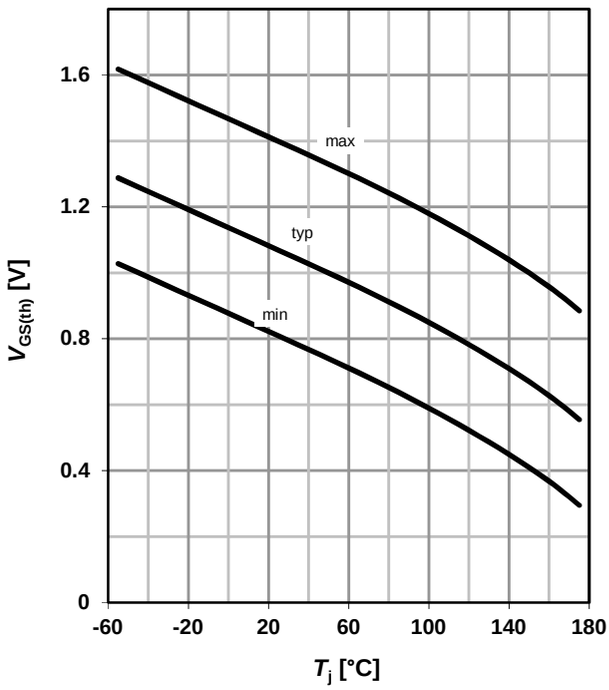


19 Typ. capacitances (P)

$C=f(V_{DS})$; V_{GS}=0 V; f=1 MHz

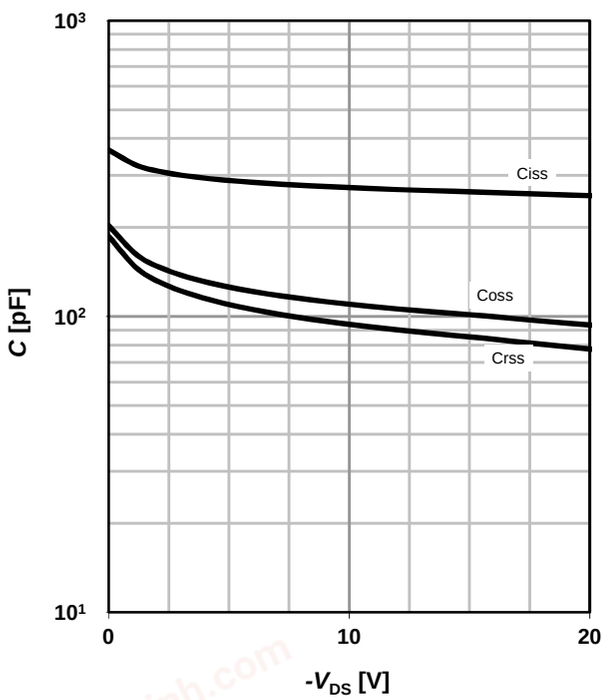

20 Typ. capacitances (N)

$C=f(V_{DS})$; V_{GS}=0 V; f=1 MHz

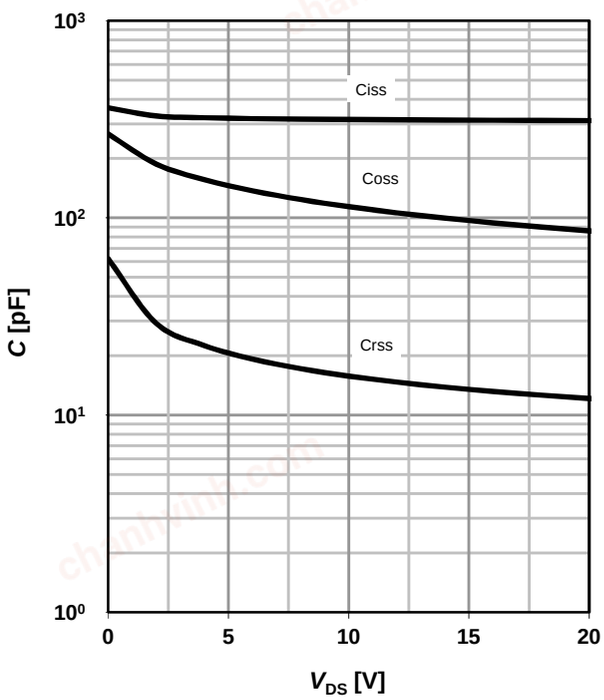


Downloaded from Arrow.com.

chanhvinh.com

22 Forward characteristics of reverse diode (P)

$I_F=f(V_{SD})$


parameter: T_j

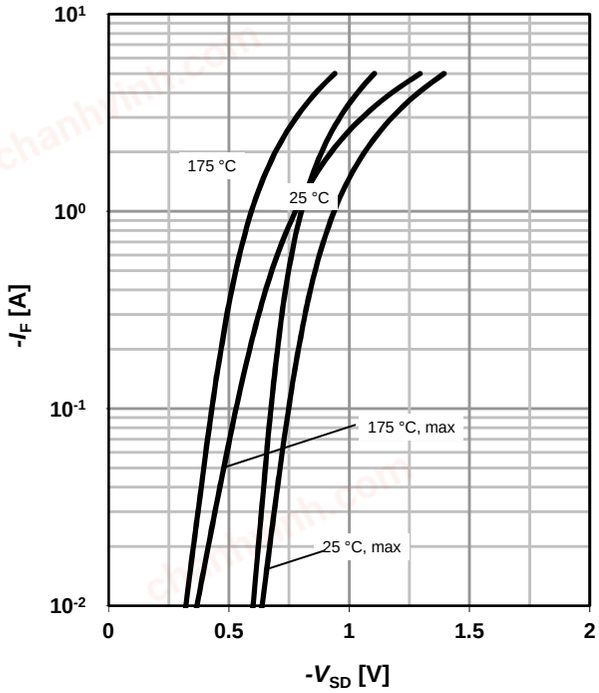

22 Forward characteristics of reverse diode (N)

$I_F=f(V_{SD})$


parameter: T_j

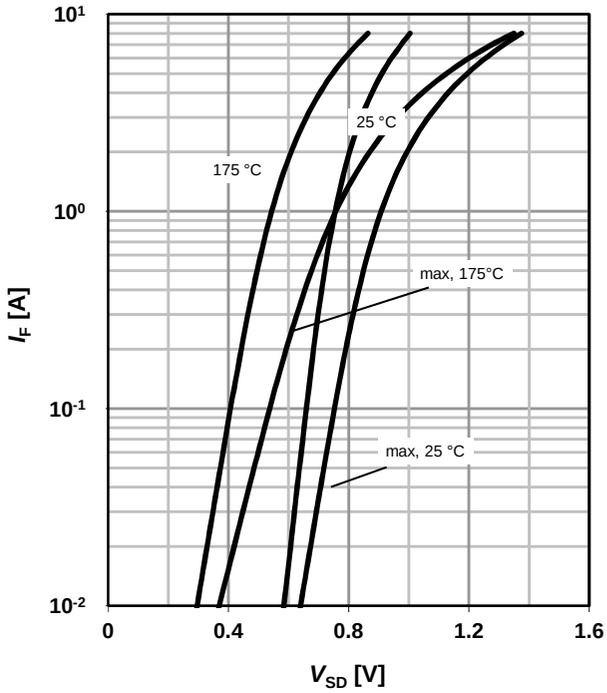

23 Avalanche characteristics (P)

$I_{AS}=f(t_{AV})$; $R_{GS}=25\ \Omega$


parameter: $T_{j(start)}$

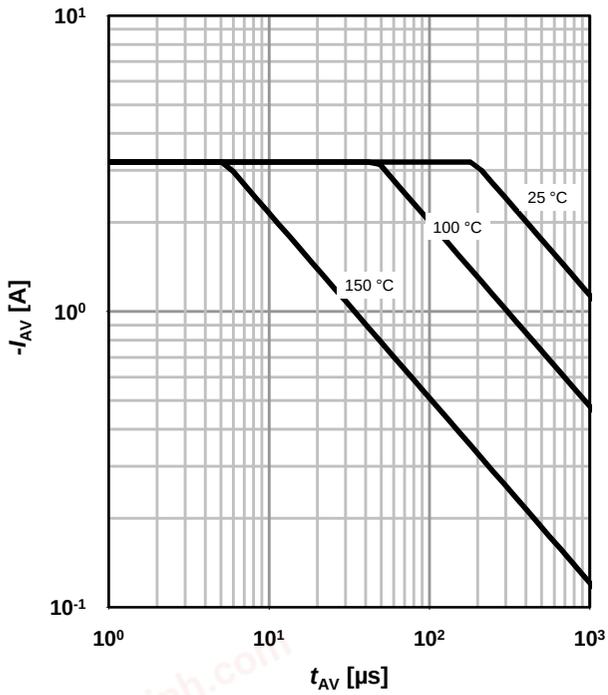

24 Avalanche characteristics (N)

$I_{AS}=f(t_{AV})$; $R_{GS}=25\ \Omega$

parameter: $T_{j(start)}$

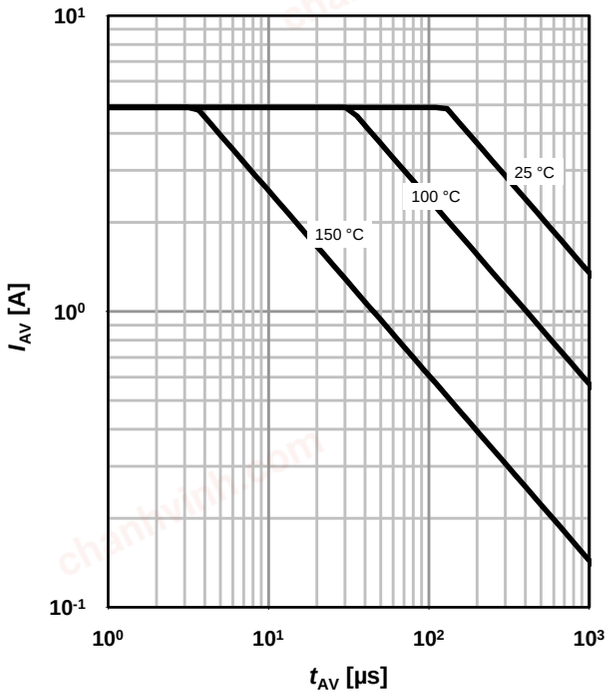


Downloaded from Arrow.com.

chanhvinh.com

26 Typ. gate charge (P)

V_{GS}=f(Q_{gate}); I_D=-3.2A pulsed


parameter: V_{DD}

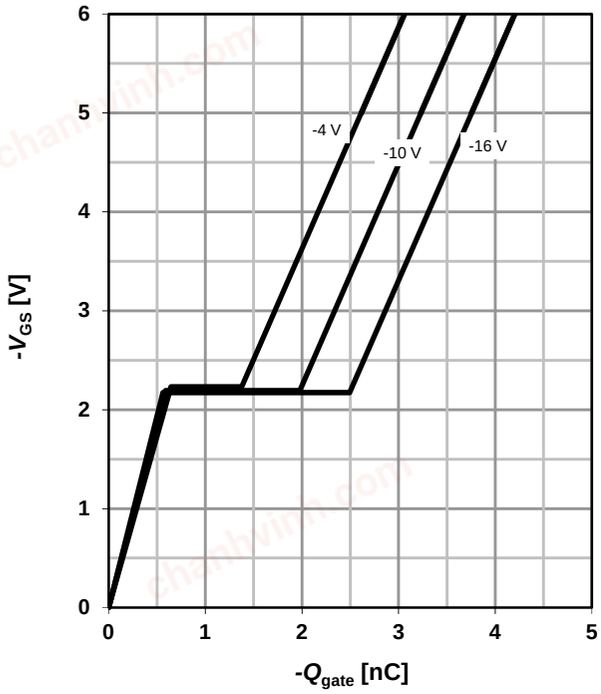

26 Typ. gate charge (N)


V_{GS}=f(Q_{gate}); I_D=5.1A pulsed

parameter: V_{DD}

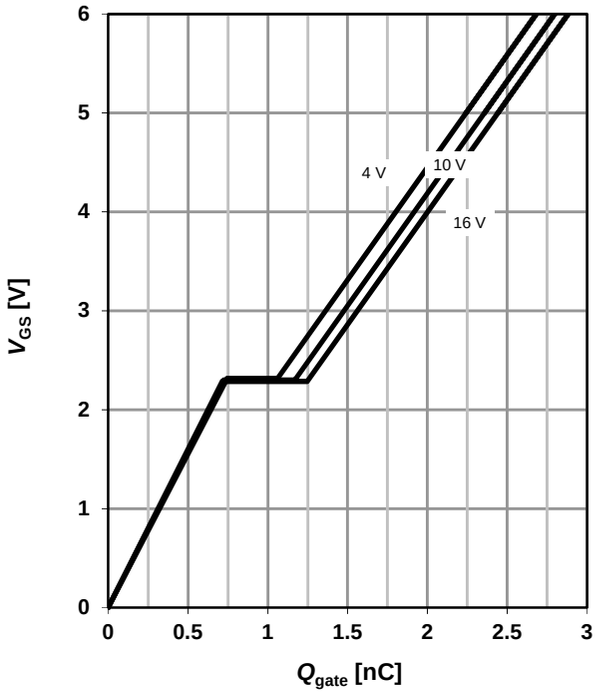


27 Drain-source breakdown voltage (P)

$V_{BR(DSS)}$=f(T_j); I_D=-250 µA

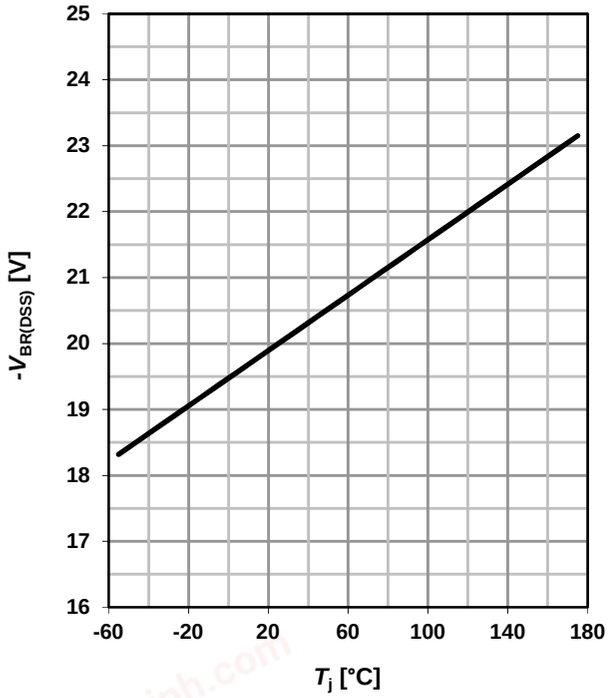

28 Drain-source breakdown voltage (N)


$V_{BR(DSS)}$=f(T_j); I_D=250 µA

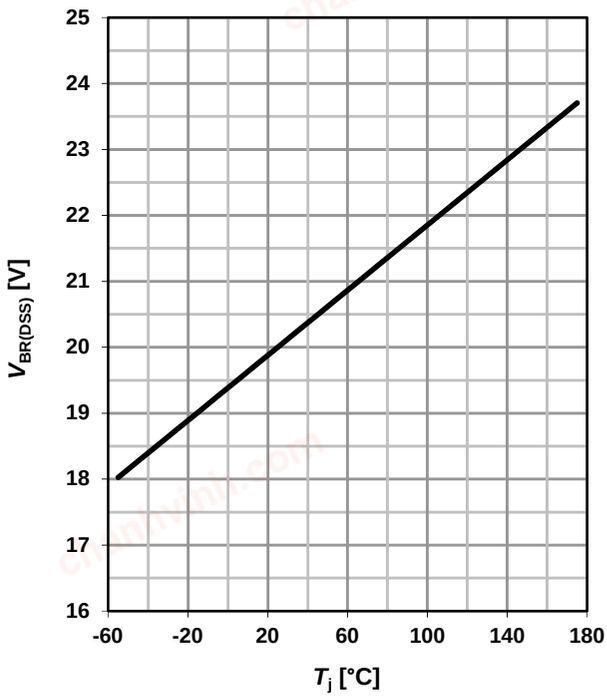

Downloaded from Arrow.com.

chanhvinh.com

Package Outline **PG-TSDSON-8**

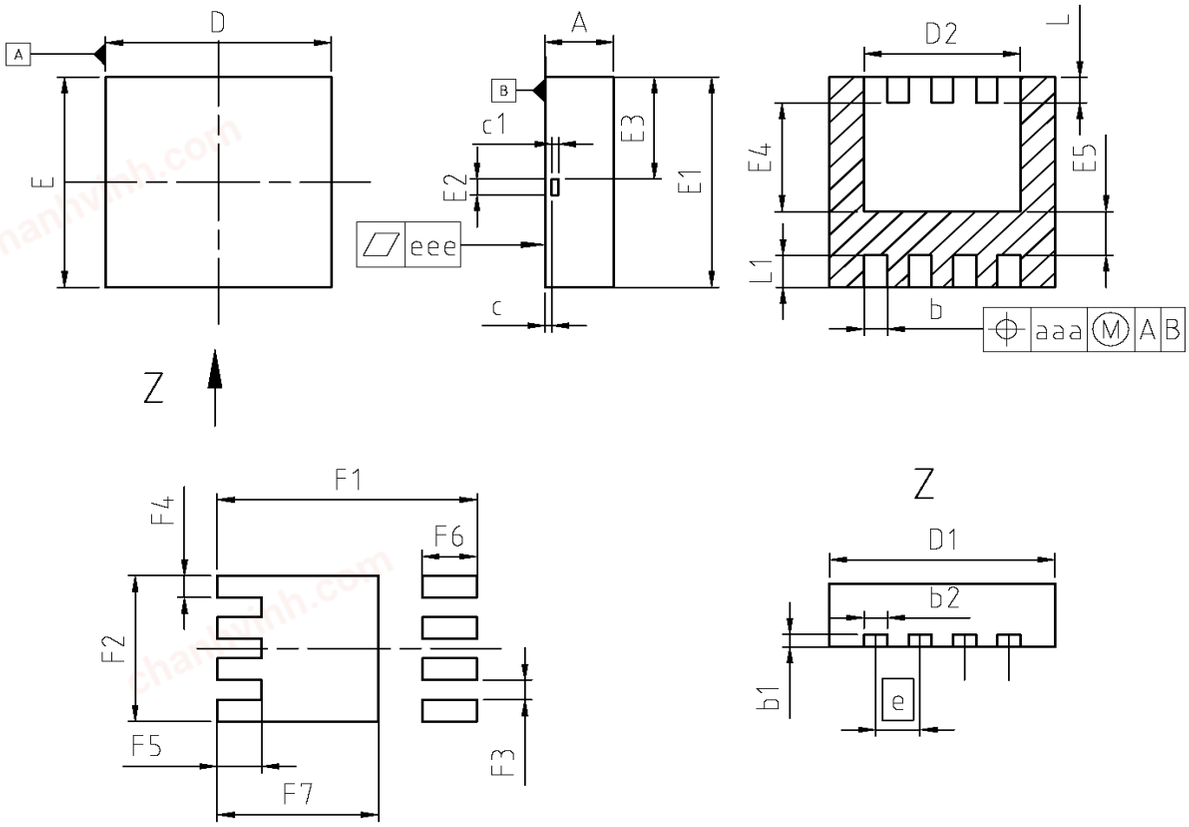

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.95	1.00	0.037	0.039
b	0.25	0.35	0.010	0.014
b1	0.10	0.30	0.004	0.012
b2	0.20	0.40	0.008	0.016
c	0.00	0.20	0.000	0.008
D=D1	3.20	3.40	0.126	0.134
D2	2.15	2.35	0.085	0.093
E=E1	3.20	3.40	0.126	0.134
E2	0.10	0.30	0.004	0.012
E3	1.35	1.55	0.053	0.061
E4	1.60	1.80	0.063	0.071
E5	0.66	0.86	0.026	0.034
e	0.60	0.70	0.024	0.028
N	8		8	
L	0.31	0.51	0.012	0.020
L1	0.33	0.53	0.013	0.021
aaa	0.25		0.010	
eee	0.05		0.002	
F1	3.70	3.90	0.146	0.154
F2	2.19	2.39	0.086	0.094
F3	0.21	0.41	0.008	0.016
F4	0.24	0.44	0.009	0.017
F5	0.55	0.75	0.022	0.030
F6	0.70	0.90	0.028	0.035
F7	2.26	2.46	0.089	0.097

DOCUMENT NO.	Z8B00131645
SCALE	0 2.5 0 2.5 5mm
EUROPEAN PROJECTION	
ISSUE DATE	09-03-2007
REVISION	01

Downloaded from Arrow.com.

chanhvinh.com

Revision History

BSZ15DC02KD H

Revision: 2019-01-30, Rev. 2.3

Previous Revision

Revision	Date	Subjects (major changes since last revision)
2.3	2019-01-30	Update Marking

Trademarks
All referenced product or service names and trademarks are the property of their respective owners.

We Listen to Your Comments
Any information within this document that you feel is wrong, unclear or missing at all? Your feedback will help us to continuously improve the quality of this document. Please send your proposal (including a reference to this document) to:
erratum@infineon.com

Published by
Infineon Technologies AG
81726 München, Germany
© 2018 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer
The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics (“Beschaffenheitsgarantie”) .

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.
In addition, any information given in this document is subject to customer’s compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer’s products and any use of the product of Infineon Technologies in customer’s applications.
The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer’s technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

Information
For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (**www.infineon.com**).

Warnings
Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.
The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support, automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Downloaded from Arrow.com.