chanhvinh.com

QJ—11107F—2007

SPECIFICATION

OF PRODUCTS

CUSTOMER : RS Components c/o WDI AG

PRODUCT NAME: CERAMIC RESONATOR

PART NUMBER : 117-ZTACC4.00MGF-W

Approved by	Checked by	Drawn by

Interquip Electronics Co Ltd.

Flat A, 9/F, On Shing Industrial Building,
2-16 Wo Liu Hang Road,
Fotan, N.T, Hong Kong
Tel: (852) 24135515 Fax: (852) 24137053
Email: iql@interquip.com

chanhvinh.com

INTERQUIP ELECTRONICS CO., LTD.

Part Number Sheet	
Customer	
Supplier P/N	117-ZTACC4.00MGF-W
Customer P/N	

Customer's Approval Certificate	
Checked & Approval by	
Date	

Mark Of Modification	Reason Of Modification	Modification	Drawn	Checked	Approval	Date

Please return this copy after signing as a certification of your approval.

chanhvinh.com

INTERQUIP ELECTRONICS CO., LTD.

1．SCOPE

This specification shall cover the characteristics of the ceramic resonator with the type 117-ZTACC4.00MGF-W.

2．PART NO.

PART NUMBER	PREVIOUS PART NUMBER
117- ZTACC4. 00MGF-W	
CUSTOMER PART NO	SPECIFICATION NO


3．OUTLINE DIMENSIONS AND MARK

3.1 Appearance: No visible damage and dirt.

3.2 Construction: SMD ceramic packaging.

3.3 The products conform to the RoHS directive and national environment protection law.

3.4 Dimensions and mark

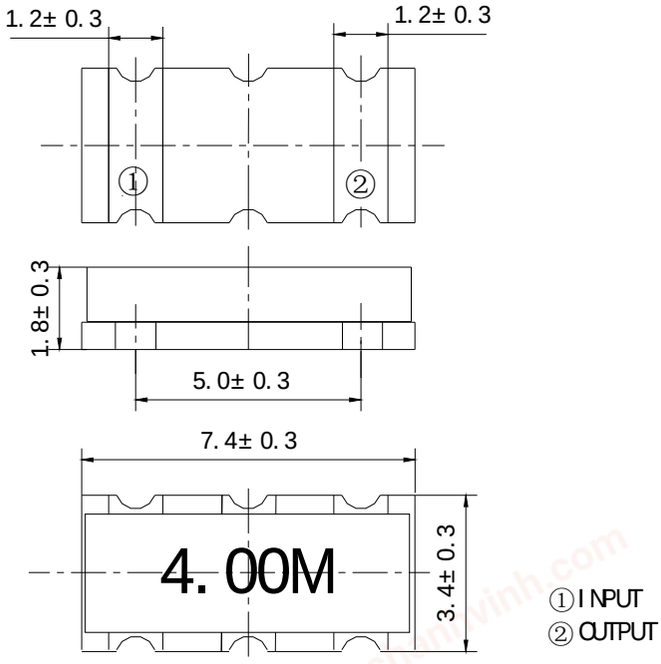

chanhvinh.com

4. ELECTRICAL SPECIFICATIONS

4.1 RATING

Items	Requirement
Withstanding Voltage (V)	50 (DC，1min)
Insulation Resistance Ri,（MΩ）min.	100 （10V，1min）
Operating temperature	-25℃～85℃
Storage temperature	-55℃～85℃
Rating Voltage U_R（V）	6V DC
	15V p-p

4.2 ELECTRICAL SPECIFICATIONS


Items	Requirement
Oscillation Frequency Fosc（MHz）	4.000
Frequency Accuracy （%）	±0.5
Resonant Impedance Ro（Ω）max.	30
Temperature Coefficient of Oscillation Frequency （%） max.	±0.3（Oscillation Frequency drift，-25℃～+85℃）
Aging Rate （%）max.	±0.3 （For Ten Years）

5. TEST

5.1 Test Conditions

Parts shall be tested under the condition (Temp.：20±15℃,Humidity ： 65±20% R.H.) unless the standard condition(Temp.：25±2℃,Humidity ： 65±5% R.H.) is regulated to measure.


5.2 Test Circuit

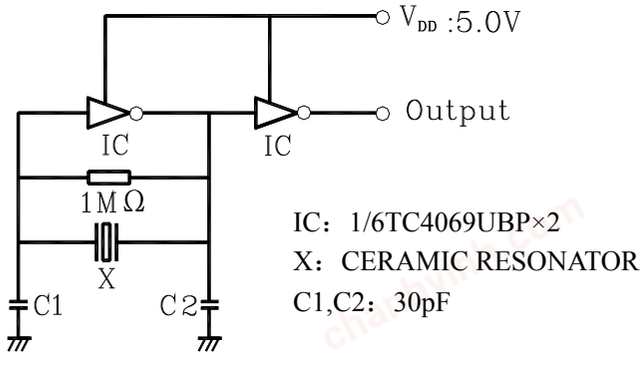

IC：1/6TC4069UBP×2
X：CERAMIC RESONATOR
C1,C2：30pF

chanhvinh.com

6 PHYSICAL AND ENVIRONMENTAL CHARACTERISTICS
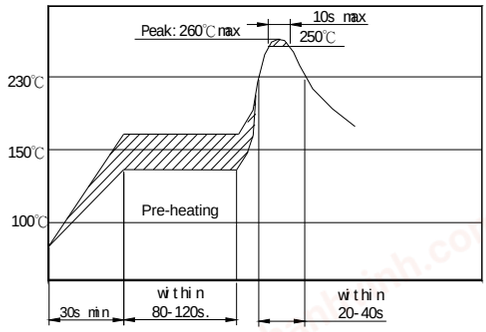
<table>
<tr><th>No</th><th>Item</th><th>Condition of Test</th><th>Performance Requirements</th></tr>
<tr><td>6.1</td><td>Humidity</td><td>Keep the resonator at 40℃±2℃ and 90%-95% RH for 96h. Then Release the resonator into the room Condition for 1h prior to the Measurement.</td><td>It shall fulfill the specifications in Table 1.</td></tr>
<tr><td>6.2</td><td>High Temperature Exposure</td><td>Subject the resonator to 85℃±2℃ for 96h, then release the resonator into the room conditions for 1h prior to the measurement.</td><td>It shall fulfill the specifications in Table 1.</td></tr>
<tr><td>6.3</td><td>Low Temperature Exposure</td><td>Subject the resonator to -25℃±2℃ for 96h, then release the resonator into the room conditions for 1h prior to the measurement.</td><td>It shall fulfill the specifications in Table 1.</td></tr>
<tr><td>6.4</td><td>Temperature Cycling</td><td>After temperature cycling of blow table was performed 5 times, resonator shall be measured after being placed in natural conditions for 1h.
<table>
<tr><th>Temperature</th><th>Time</th></tr>
<tr><td>–25±3℃</td><td>30±3 min</td></tr>
<tr><td>85±3℃</td><td>30±3 min</td></tr>
</table></td><td>It shall fulfill the specifications in Table 1.</td></tr>
<tr><td>6.5</td><td>Vibration</td><td>Subject the resonator to vibration for 2h each in x、y and z axis With the amplitude of 1.5mm, the frequency shall be varied uniformly between the limits of 10 Hz—55Hz.</td><td>It shall fulfill the specifications in Table 1.</td></tr>
<tr><td>6.6</td><td>Mechanical Shock</td><td>Drop the resonator randomly onto a wooden floor from the height of 100cm 3 times.</td><td>It shall fulfill the specifications in Table 1.</td></tr>
<tr><td>6.7</td><td>Soldering Test</td><td>Passed through the re-flow oven under the following condition and left at room temperature for 1h before measurement.

</td><td>It shall fulfill the specifications in Table 1.</td></tr>
</table>

（To be continued）

chanhvinh.com

6 PHYSICAL AND ENVIRONMENAL CHARACTERISICS

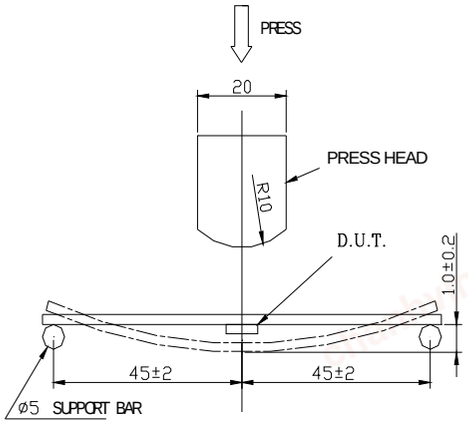
No	Item	Condition of Test	Performance Requirements
6.8	Solder Ability	Dipped in 245℃±5℃ solder bath for 3s±0.5 s with rosin flux (25wt% ethanol solution.)	The terminals shall be at least 95% covered by solder.
6.9	Board Bending	Mount a glass-epoxy board (Width=40mm,thickness=1.6mm),then bend it to 1mm displacement and keep it for 5s. (See the following figure) 	Mechanical damage such as breaks shall not occur.


Table 1

Item	Specification after test
Oscillation Frequency Change Δ fosc/fosc （%）max.	±0.3
Resonant Impedance Ro（Ω）max.	35
The limits in the above table are referenced to the initial measurements.	


chanhvinh.com

7 RECOMMENDED LAND PATTERN AND REFLOW SOLDERING STANDARD CONDITIONS

7.1Recommended land pattern

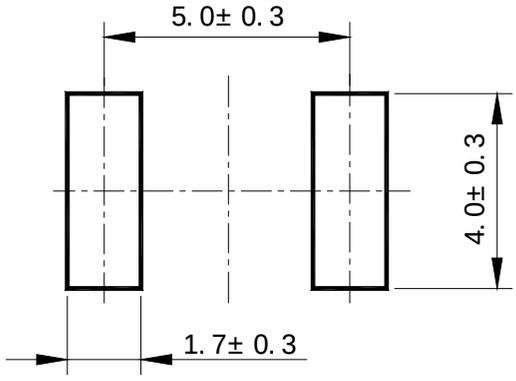

7.2Recommended reflow soldering standard conditions

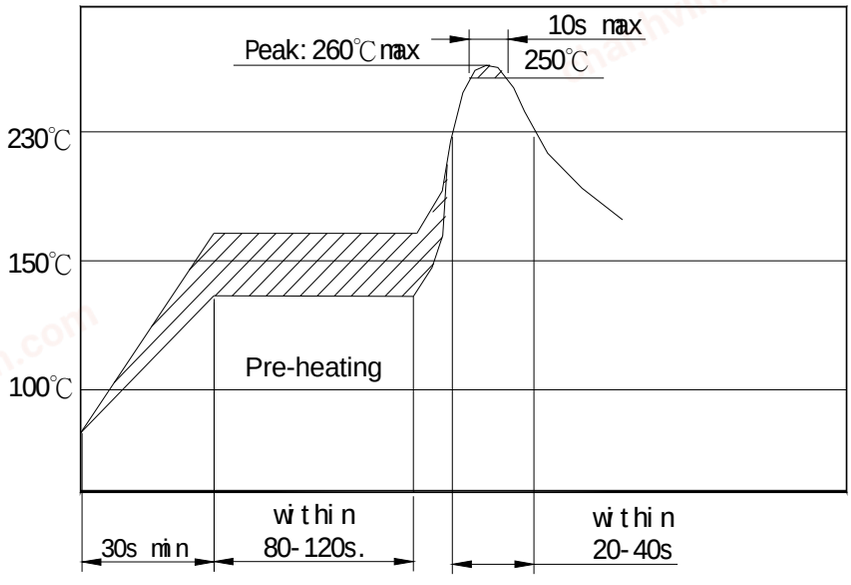


chanhvinh.com

8. PACKAGE

To protect the products in storage and transportation，it is necessary to pack them （outer and inner package）.

8.1 On paper pack, the following requirements are requested.

8.1.1 Dimensions and Mark

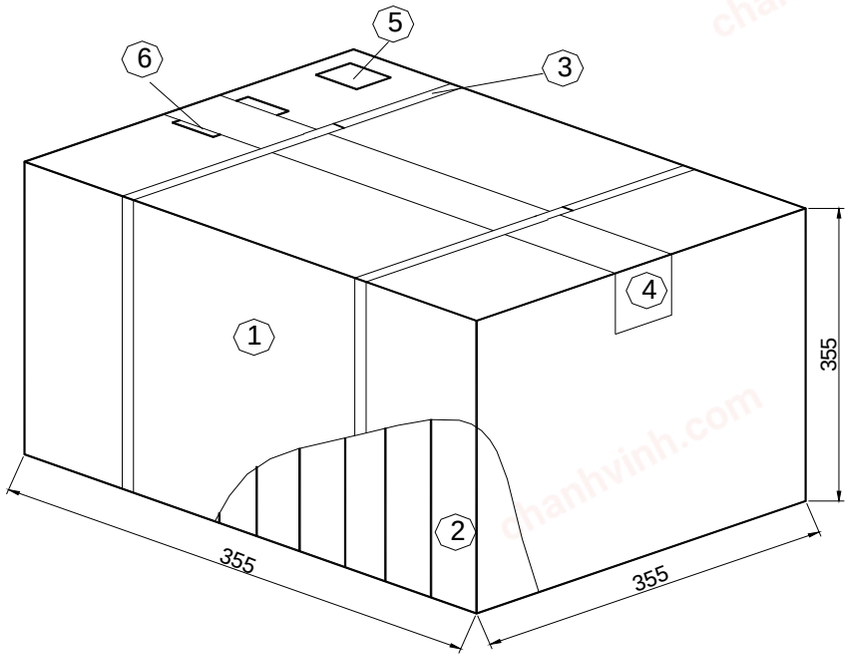

NO.	Name	Quantity
①	Package	1
②	Inner Box	12
③	Belt	2.9 m
④	Adhesive tape	1.2 m
⑤	Label	1
⑥	Certificate of approval	1

chanhvinh.com

8.1.2 Section of package

Package is made of corrugated paper with thickness of 0.8cm.Package has 10 inner boxes, each box has 1 reel(each reel for plastic bag)

8.1.3 Quantity of package


Per plastic reel 4000 pieces of piezoelectric ceramic part

Per inner box 1 reel

Per package 10 inner boxes

（40000 pieces of piezoelectric ceramic part ）

8.1.4 Inner Box Dimensions

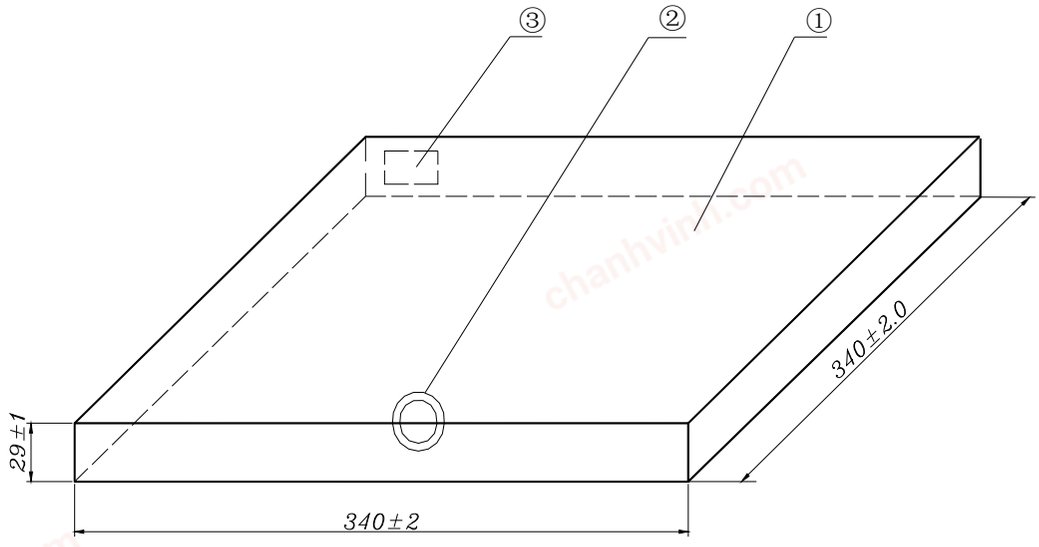


NO.	Name	Quantity
①	Inner Box	1
②	QC Label	1
③	Label	1

chanhvinh.com


8.2 On reel pack, the following requirements are requested.

8.2.1 Reel Dimensions

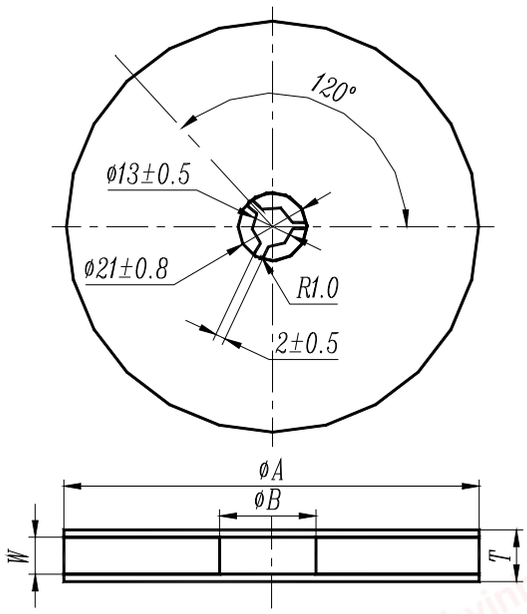


ϕ A	ϕ B	W	T	Pieces per reel	Carrier tape size
330±3	80min	16.4min	22.4max	4000typ.	16

8.2.3 Packing Method Sketch Map

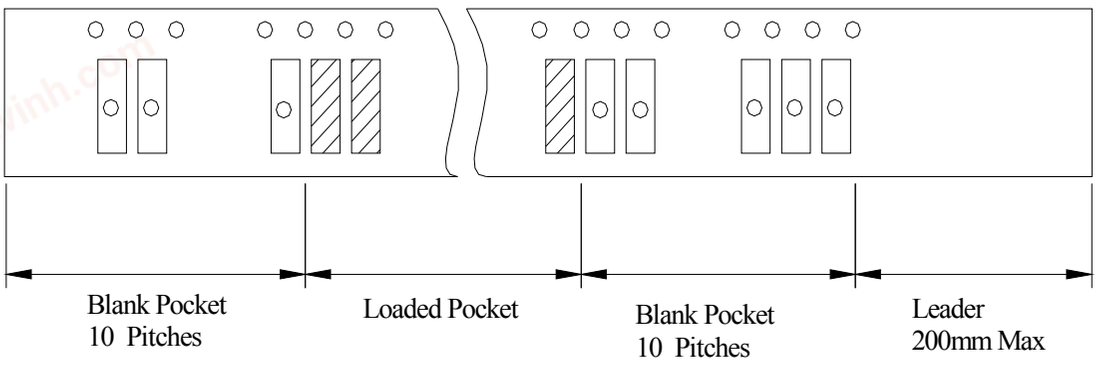

chanhvinh.com

8.2.4Test Condition Of Peeling Strength

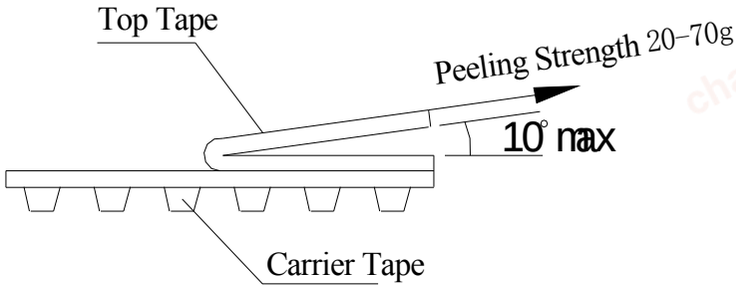

9．OTHER

9.1 Caution

9.1.1 Don’t apply excess mechanical stress to the component and terminals at soldering. Do not use this product with bend.

9.1.2 Do not clean or wash the component for it is not hermetically sealed.

9.1.3 Do not use strong acidity flux，more than 0.2wt% chlorine content，in flow soldering.

9.1.4 Don’t be close to fire.

9.1.5 This specification mentions the quality of the component as a single unit. Please insure the component is thoroughly evaluated in your application circuit

9.1.6 Expire date (Shelf life) of the products is six months after delivery under the conditions of a sealed and an unopened package. Please use the products within six months after delivery. If you store the products for a long time (more than six months), use carefully because the products may be degraded in the solderability or rusty. Please confirm solderability and characteristics for the products regularly.

9.1.7 Please contact us before using the product as automobile electronic component.

9.2 Notice

9.2.1 Please return one of this specification after your signature of acceptance.

9.2.2 When something gets doubtful with this specifications, we shall jointly work to get an agreement.