chanhvinh.com

Kingbright

2.0x1.25mm SMD CHIP LED LAMP

Part Number: KP-2012SGC

Super Bright Green


Features

- 2.0mmx1.25mm SMT LED,1.1mm thickness.
- Low power consumption.
- Wide viewing angle.
- Ideal for backlight and indicator.
- Various colors and lens types available.
- Package : 2000pcs / reel.
- Moisture sensitivity level : level 3.
- RoHS compliant.

Description

The Super Bright Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

Package Dimensions

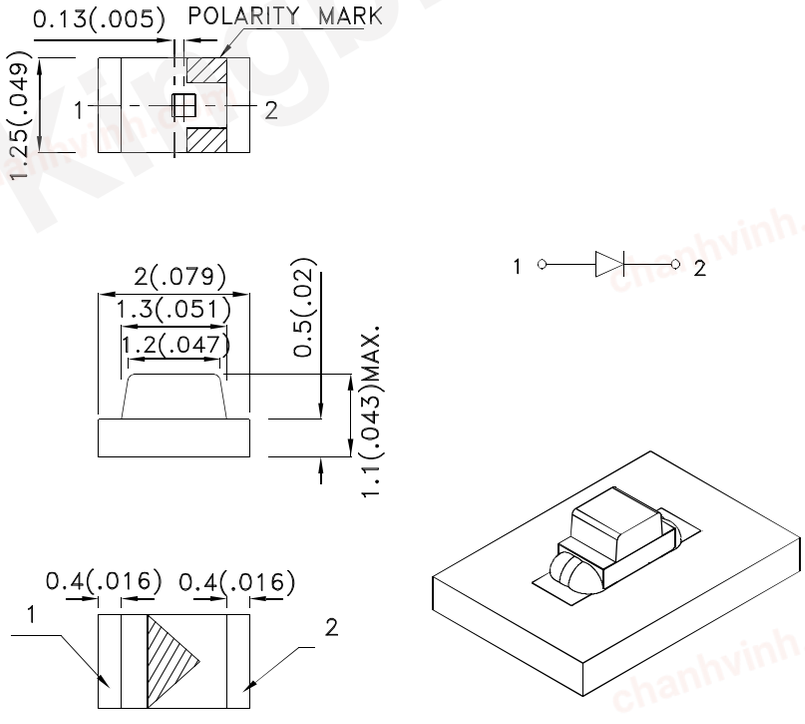

Notes:
1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.1(0.004") unless otherwise noted.
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.
4. The device has a single mounting surface. The device must be mounted according to the specifications.

chanhvinh.com

Kingbright

Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) [2] @ 20mA		Viewing Angle [1]
			Min.	Typ.	2θ1/2
KP-2012SGC	Super Bright Green (GaP)	Water Clear	5	12	120°

Notes:
1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.
2. Luminous intensity/ luminous Flux: +/-15%.
3. Luminous Intensity value is traceable to the CIE127-2007 compliant national standards.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Super Bright Green	565		nm	I_F=20mA
λD [1]	Dominant Wavelength	Super Bright Green	568		nm	I_F=20mA
Δλ1/2	Spectral Line Half-width	Super Bright Green	30		nm	I_F=20mA
C	Capacitance	Super Bright Green	15		pF	V_F=0V;f=1MHz
V_F [2]	Forward Voltage	Super Bright Green	2.2	2.5	V	I_F=20mA
I_R	Reverse Current	Super Bright Green		10	uA	V_R=5V

Notes:
1.Wavelength: +/-1nm.
2.Forward Voltage: +/-0.1V.
3.Wavelength value is traceable to the CIE127-2007 compliant national standards.


Absolute Maximum Ratings at TA=25°C

Parameter	Super Bright Green	Units
Power dissipation	62.5	mW
DC Forward Current	25	mA
Peak Forward Current [1]	140	mA
Reverse Voltage	5	V
Operating Temperature	-40°C To +85°C	
Storage Temperature	-40°C To +85°C	

Note:
1. 1/10 Duty Cycle, 0.1ms Pulse Width.


chanhvinh.com

Kingbright

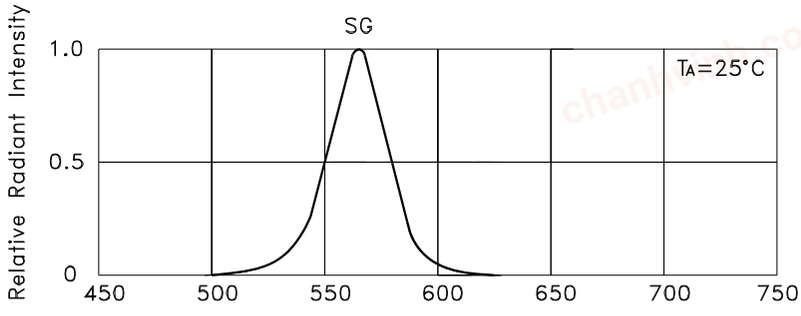


RELATIVE INTENSITY Vs. WAVELENGTH


Super Bright Green KP-2012SGC




FORWARD CURRENT Vs. FORWARD VOLTAGE




LUMINOUS INTENSITY Vs. FORWARD CURRENT



FORWARD CURRENT DERATING CURVE

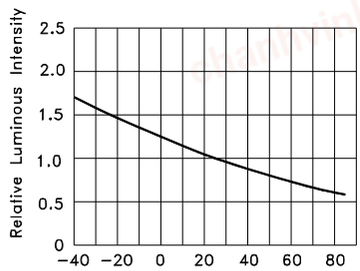

LUMINOUS INTENSITY Vs. AMBIENT TEMPERATURE



SPATIAL DISTRIBUTION


chanhvinh.com

Kingbright

KP-2012SGC


Reflow soldering is recommended and the soldering profile is shown below.
Other soldering methods are not recommended as they might cause damage to the product.

Reflow Soldering Profile For Lead-free SMT Process.

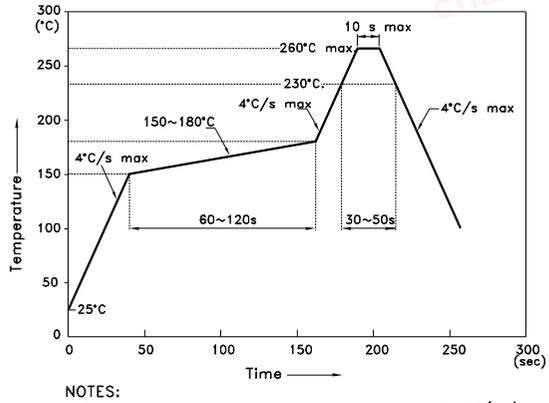


NOTES:
1. We recommend the reflow temperature 245°C(+/-5°C).The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.


Recommended Soldering Pattern
(Units : mm; Tolerance: ± 0.1)

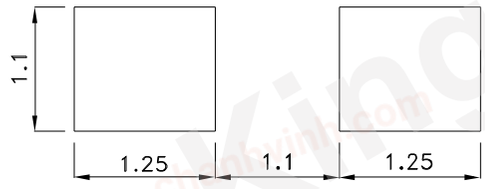

Reel Dimension

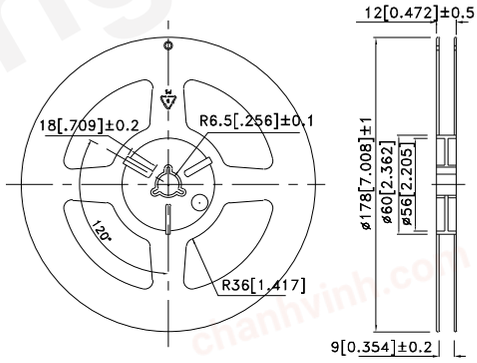


Tape Dimensions
(Units : mm)

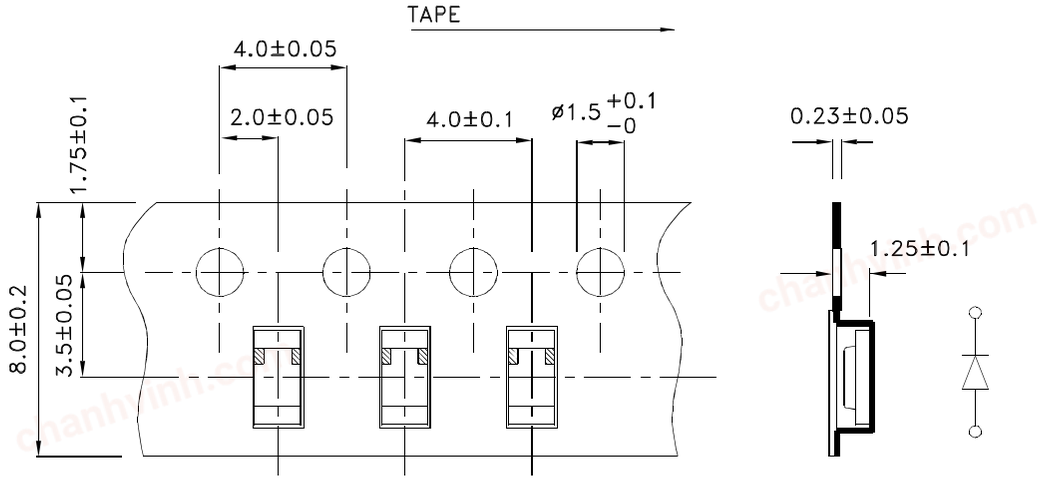


chanhvinh.com

Kingbright

PACKING & LABEL SPECIFICATIONS **KP-2012SGC**

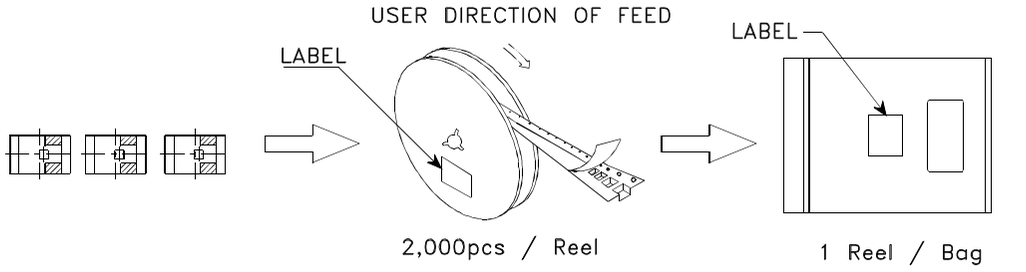

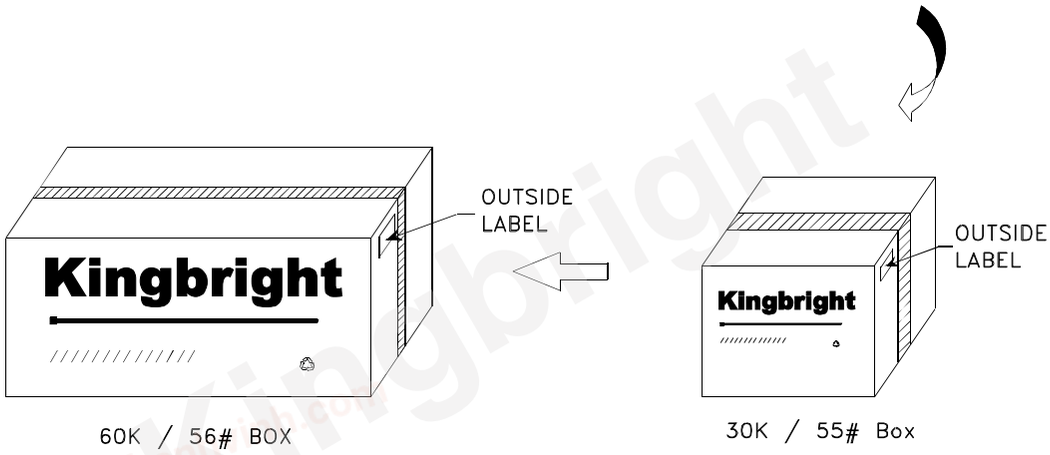

Kingbright

P/NO: KP-2012xxx

QTY: 2,000 pcs Q.C. Q C XX XX XXXX PASSED

S/N: XXXX

CODE: XXX

LOT NO:

XXXXXXXXXXXXXXXXXXXXXXXX

RoHS Compliant