chanhvinh.com

THICK FILM (WIDE TERMINAL TYPE LOW RESISTANCE)


EU RoHS

WU73 Wide Terminal Type Low Resistance Flat Chip Resistors (Low T.C.R.)



Coating color : Black

■Construction

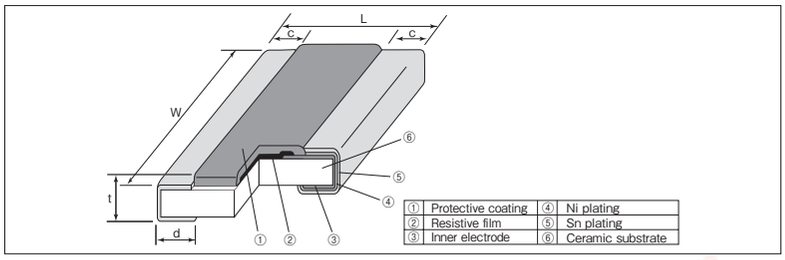

■Features

- Flat chip resistors of wide terminal type.
- High reliability and performance with T.C.R. $\pm 75\times10^{-6}$/K～, resistance tolerance ±1%.
- Suitable for flow and reflow solderings.
- Products meet EU-RoHS requirements.
- AEC-Q200 Tested.

■Applications

- Power supply, ECU etc.

■Reference Standards

IEC 60115-8
JIS C 5201-8
EIAJ RC-2134C

■Dimensions

Type (Inch Size Code)	Dimensions (mm)					Weight (g) (1000pcs)
	L±0.15	W$^{+0.1}_{-0.3}$	c±0.2	d±0.15	t±0.1	
2B (0612)	1.6	3.2	0.4	0.45	0.6	12.0
2B15 (0612)	1.6	3.2	0.4	0.45	0.6	12.0

■Type Designation

Example

WU73	2B	T	TD	10L0	F
Product Code	Power Rating	Terminal Surface Material	Taping	Nominal Resistance	Resistance Tolerance
WU73	2B:1W 2B15:1.5W※2	T : Sn	TD: 4mm pitch punch paper BK: Bulk	4 digits Ex. 10L0 : 10mΩ R100 : 100mΩ	F : ±1%

Resistance Value (Ω)	4 digits
10m～91m	10L0～91L0
0.1	R100

Contact us when you have control request for environmental hazardous material other than the substance specified by EU-RoHS.
For further information on taping, please refer to APPENDIX C on the back pages.

■Ratings

Type	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. ($\times10^{-6}$/K)	Resistance Range (Ω) E24 & 25m, 50m※1	Resistance Tolerance	Operating Temp. Range	Taping & Q'ty/Reel (pcs)
WU73 2B	1W	70℃	115℃	±100	10m～12m	F : ±1%	−55℃～155℃	5,000
				±75	13m～27m			
				±100	30m～100m			
WU73 2B15	1.5W※2	70℃	95℃	±100	10m～12m			
				±75	13m～27m			
				±100	30m～100m			


Rated voltage = $\sqrt{\text{Power Rating}\times\text{Resistance value}}$
※1 25mΩ and 50mΩ are available.
※2 If you use at the rated power, please keep the condition that the terminal of the resistor is below the rated terminal part temperature. Please refer to the derating curves based on the terminal temperature of right side on the next page.
If any questions arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature" in your usage conditions, please give priority to the "Rated Terminal Part Temperature".
For more details, please refer to "Introduction of the derating curves based on the terminal part temperature" on the beginning of our catalog.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.
Contact our sales representatives before you use our products for applications including automotives, medical equipment and aerospace equipment.
Malfunction or failure of the products in such applications may cause loss of human life or serious damage.

chanhvinh.com


■Derating Curve

Ambient temperature

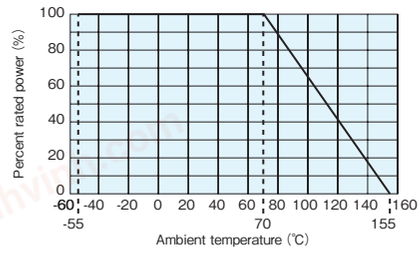

For resistors operated at an ambient temperature of 70℃ or higher, the power shall be derated in accordance with the derating curve.


Terminal part temperature

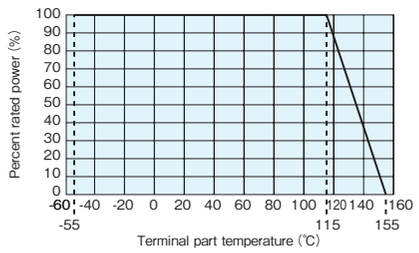

When the terminal part temperature of the resistor exceeds the rated terminal part temperature shown above, the power shall be derated according to the derating curve.


※Please refer to"Introduction of the derating curves based on the terminal part temperature"on the beginning of our catalog before use.

Terminal part temperature
WU73 2B15(1.5W)

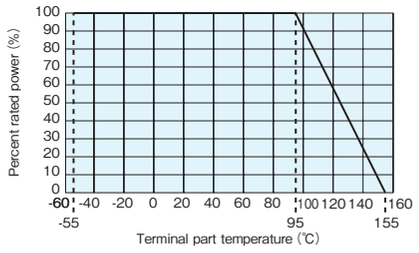


■Temperature Rise

WU73 2B

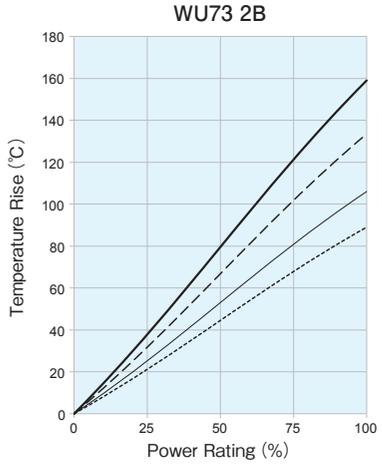


Regarding the temperature rise, the value of the temperature varies per conditions and board for use since the temperature is measured under our measuring conditions.

Measurement condition
Room temperature: 25℃
PCB: FR-4t = 1.6mm
Cu foil thickness: 35μm



■One-Pulse Limiting Electric Power

WU73 2B/2B15

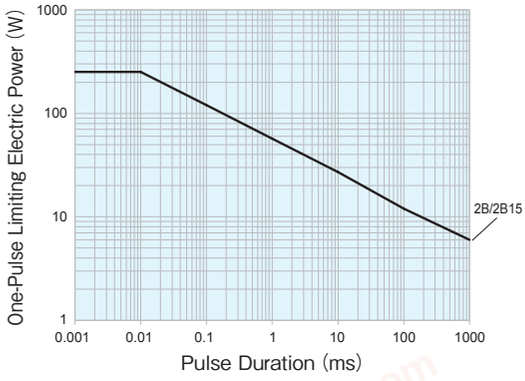

Please ask us about the resistance characteristic of continuous applied pulse. The pulse endurance values are not assured values,so be sure to check the products on actual equipment when you use them.

■Performance

Test Items	Performance Requirements ΔR± (%+0.005Ω)		Test Methods
	Limit	Typical	
Resistance	Within specified tolerance	—	25℃
T.C.R.	Within specified T.C.R	—	+25℃/−55℃ and +25℃/+125℃
Overload (Short time)	2	0.2	Rated voltage×2 for 5s
Resistance to soldering heat	1	0.2	260℃±5℃, 10s±1s
Bending test	1	0.1	Holding point 90mm, Bending 1time. Bending 5mm
Rapid change of temperature	2	0.3	−55℃ (30min.) /+125℃ (30min.) 1000 cycles
Moisture resistance	2	0.1	40℃±2℃, 90~95%RH, 1000h 1.5h ON/0.5h OFF cycle
Endurance at 70℃ or rated terminal part temperature	2	0.2	70℃±2℃ or rated terminal part temperature ±2℃ 1000h 1.5h ON/0.5h OFF cycle
High temperature exposure	1	0.1	+155℃, 1000h

■Precautions for Use

- The substrate of chip resistors is alumina. Cracks may occur at the connection of solder (solder fillet portion) due to the difference of the coefficient of thermal expansion from a mounting board when heat stress like heat cycle, etc. are repeatedly given to them. Care should be taken to the occurrence of the cracks when the change in ambient temperature or ON/OFF of load is repeated, especially when WU73 which have self-heating. The occurrence of the crack by heat stress may be influenced by the size of a pad, solder volume, heat radiation of mounting board etc., so please pa careful attention to designing when a big change in ambient temperature and conditions for use like ON/OFF of load can be assumed.
- In the resistance values of 50mΩ or under, the resistance value after soldering may change depending on the size of pad pattern or solder amount. Make sure the effect of decline/increase of resistance value before designing.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.
Contact our sales representatives before you use our products for applications including automotives, medical equipment and aerospace equipment.
Malfunction or failure of the products in such applications may cause loss of human life or serious damage.