
chanhvinh.com

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/26/12	D. DESJARDIN

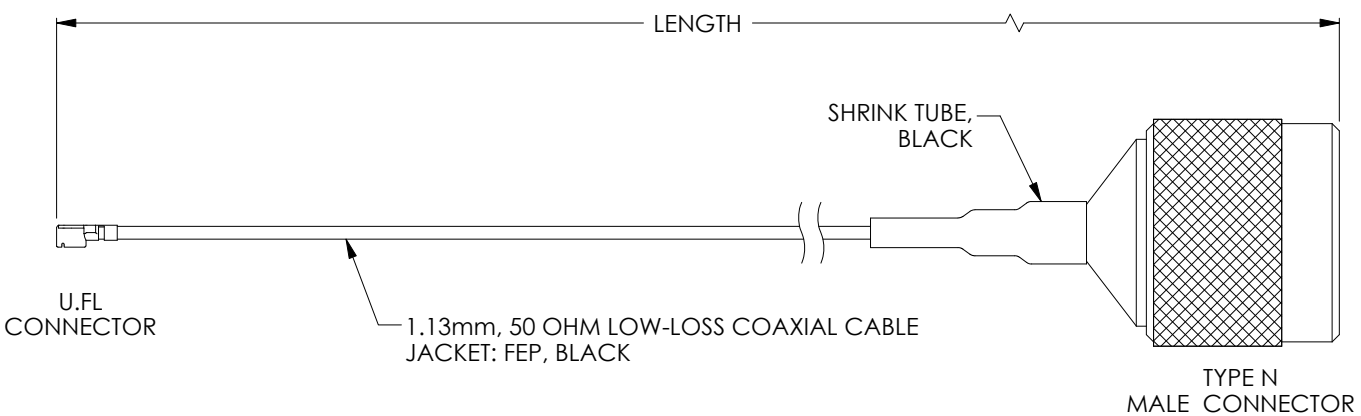

LENGTH CODE CHART		
CABLE# & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART# USED
CA-UFLNMQXXX	WHERE XXX = LENGTH IN FEET	CA-UFLNMQ010 (10 FEET)
CA-UFLNMQNXX	WHERE NXX = LENGTH IN INCHES	CA-UFLNMQN16 (16 INCHES)
CA-UFLNMQMXX	WHERE MXX = LENGTH IN METERS	CA-UFLNMQM07 (7 METERS)
CA-UFLNMQXMX	WHERE XMX = LENGTH IN DECIMAL METERS	CA-UFLNMQ3M5 (3.5 METERS)
CA-UFLNMQCXX	WHERE CXX = LENGTH IN CENTIMETERS	CA-UFLNMQC30 (30 CENTIMETERS)

RoHS Compliant ✔

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL RECEIVE INSERTION LOSS TEST PER L-COM SPECIFICATIONS.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2
.XX = ± .02
.XXX = ±.005
PROJECTION

APPROVALS	DATE
DRAWN BY D.PARHAM	07/25/2012
CHECKED BY K.BURGNER	07/26/2012
APPROVED BY K.BURGNER	07/26/2012

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY
COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: COAXIAL

PRODUCT DESCRIPTION: CA,U.FL TO N-MALE

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	CA-UFLNMQ	A

SCALE: NONE | CAD FILE: CA-UFLNMQ.SLDDRW | SHEET 1 OF 1