
chanhvinh.com

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 10454: UPDATE B PLUG VIEW	04/01/2020	DGUTTADAURO



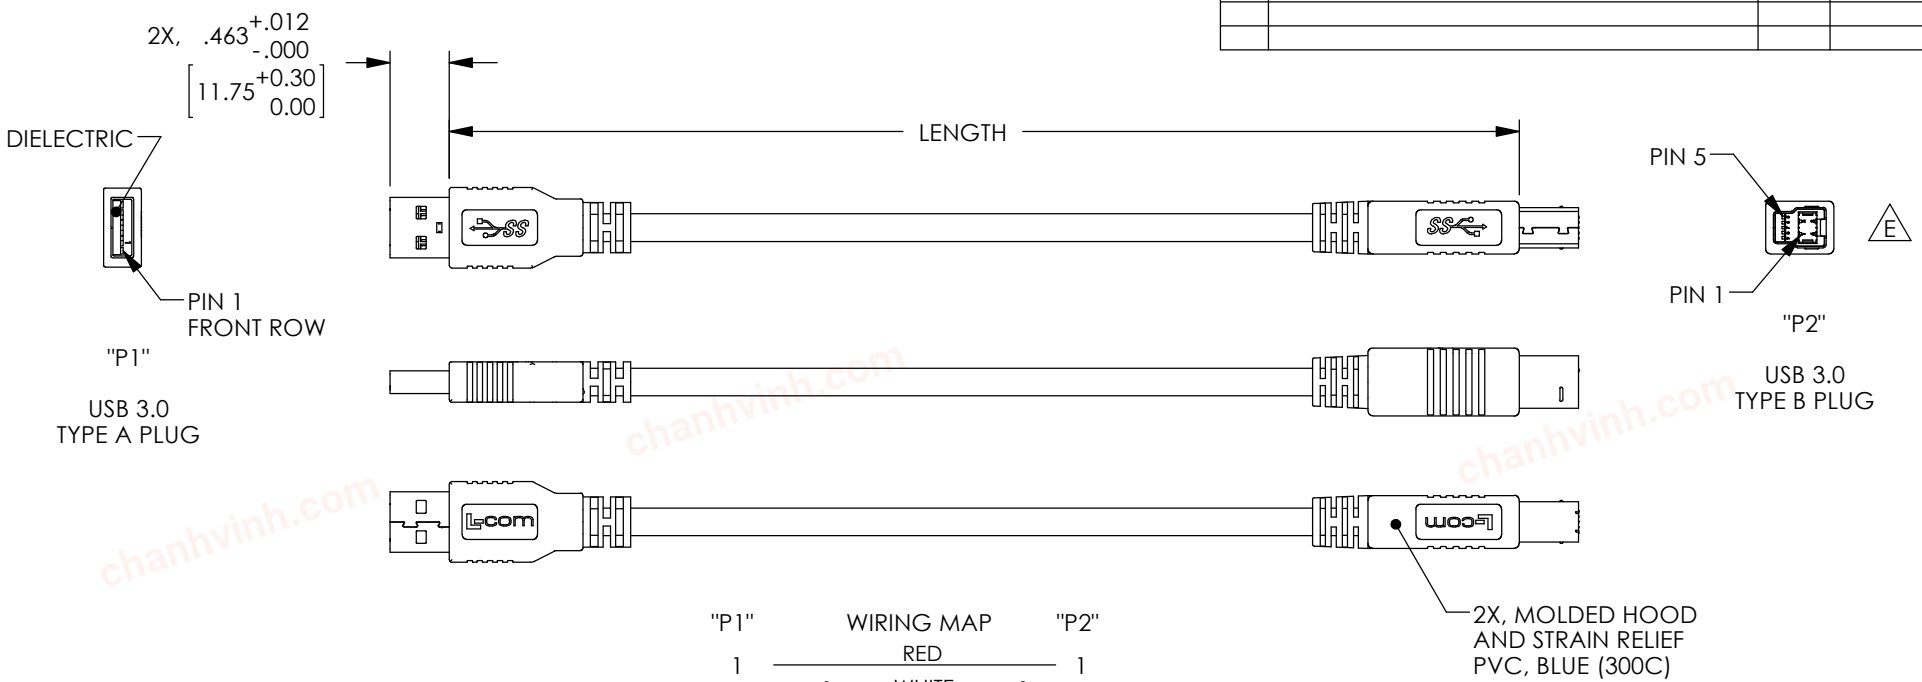

MODEL NUMBER	LENGTH METERS [FEET]
CAU3AB-03M	0.3 [.98]
CAU3AB-05M	0.5 [1.64]
CAU3AB-075M	0.75 [2.46]
CAU3AB-1M	1.0 [3.28]
CAU3AB-2M	2.0 [6.56]
CAU3AB-3M	3.0 [9.84]
CAU3AB-5M	5.0 [16.41]

NOTES:

CABLE: UL STYLE 20276, 2X, TWISTED PAIR, 30AWG WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE. ONE UNSHIELDED TWISTED PAIR, 30AWG. 2 COND., 24AWG. OVERALL BRAID SHIELD, 65%
JACKET: PVC, BLUE (PANTONE 300C)

MISCELLANEOUS:
CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS.
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5] | FRACTIONS ± 1/32
.XX = ± .02 [.5] | ANGLES ± 1°
.XXX = ± .005 [.13]
THIRD-ANGLE PROJECTION

APPROVALS	DATE
DRAWN BY D.FRISIELLO	4/2/10
CHECKED BY M.MARTINEZ	4/2/10
APPROVED BY S.SMITH	4/2/10

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY
COLOR VARIATIONS MAY OCCUR

L-com an INFINITE brand
50 High Street, West Mill, North Andover, MA 01845 USA.
Phone: 1.800.341.5266
1.978.682.6936

CATEGORY: USB

PRODUCT DESCRIPTION: CA, USB 3.0 TYPE A-M TO TYPE B-M

SIZE	CAGE CODE	DWG. NO.	REV.
A	43321	CAU3AB	E

SCALE: NONE | CAD FILE: CAU3AB.SLDDRW | SHEET 1 OF 1

T-Rev.D