

chanhvinh.com

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/1/13	D.GRIFFIN
B	ECN 10770: ADD CABLE FLAME, TEMP RATING AND LSZH IEC STANDARDS; REMOVE -5M	11/04/2020	DGUTTADAURO

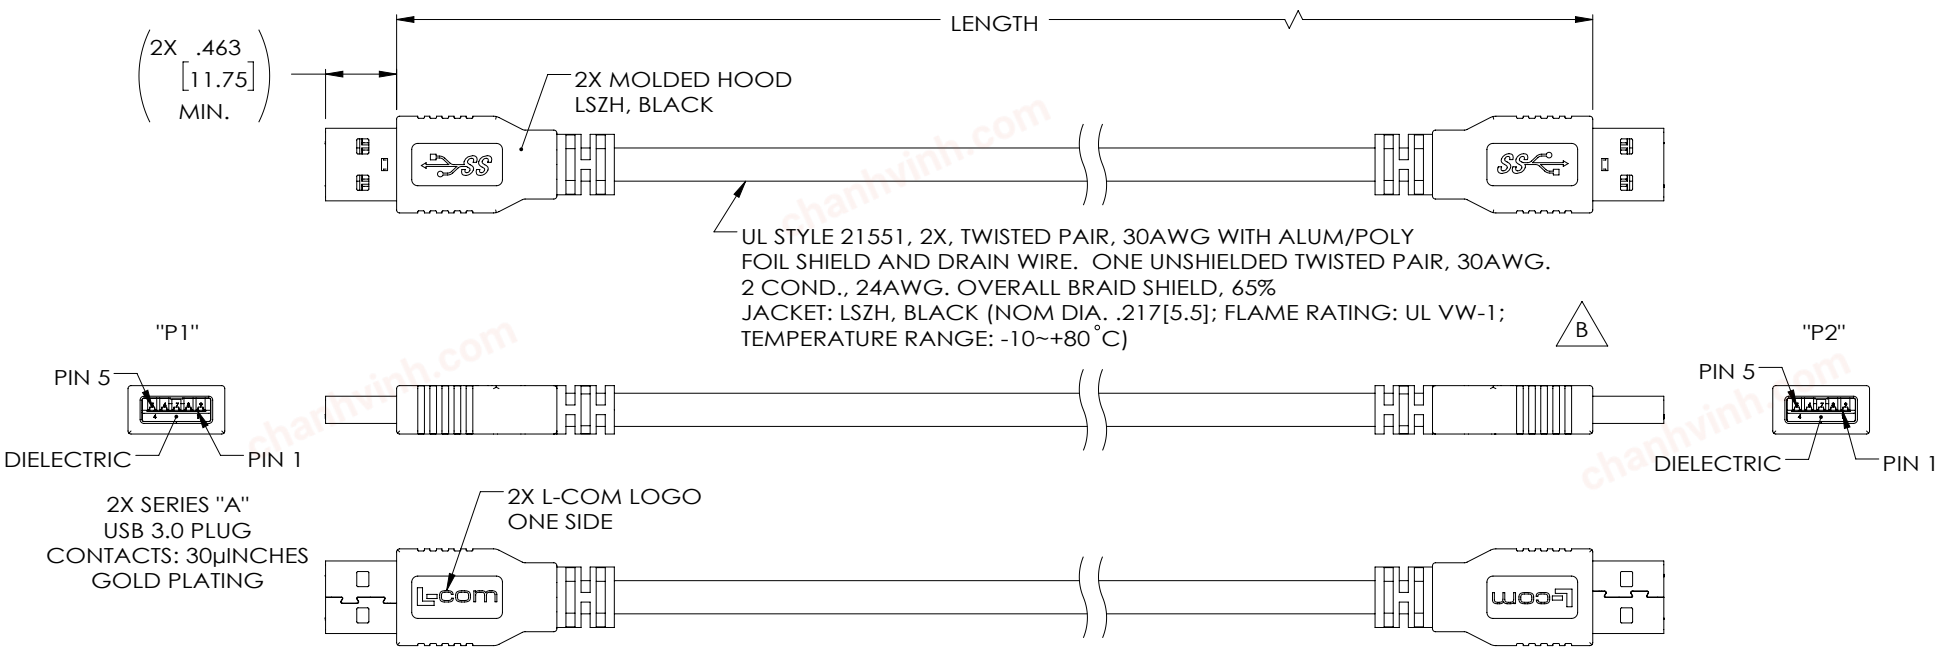

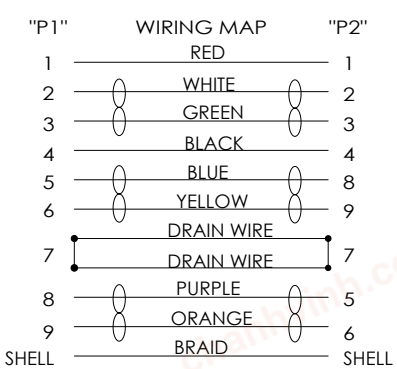

MODEL NUMBER	LENGTH METERS [FEET]
CAU3ZAA-03M	0.3 [.98]
CAU3ZAA-05M	0.5 [1.64]
CAU3ZAA-1M	1.0 [3.28]
CAU3ZAA-2M	2.0 [6.56]
CAU3ZAA-3M	3.0 [9.84]

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
3. CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

LSZH CABLE CHARACTERISTICS:
FLAME RATING: IEC 60332-1
CORROSIVE GAS: IEC 60754
SMOKE EMISSION: IEC 61034

B

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5] | FRACTIONS ± 1/32
.XX = ± .02 [.5] | ANGLES ± 1°
.XXX = ± .005 [.13]
THIRD-ANGLE PROJECTION

APPROVALS	DATE
DRAWN BY D. DESJARDIN	8/22/13
CHECKED BY D. PARHAM	9/4/13
APPROVED BY S. SMITH	9/25/13

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-com an INFINITE brand
50 High Street, West Mill, North Andover, MA 01845 USA.
Phone: 1.800.341.5266
1.978.682.6936

CATEGORY: USB

PRODUCT DESCRIPTION: CBL USB 3.0 A/A LSZH

SIZE	CAGE CODE	DWG. NO.	REV.
A	43321	CAU3ZAA	B

SCALE: NONE | CAD FILE: CAU3ZAA.SLDDRW | SHEET 1 OF 1

T-Rev.D