

chanhvinh.com


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 6991: CHANGED SR TO PVC. UPD CONNECTOR PICTORALLY. ROHS NOTE	8/2/13	D. DESJARDIN

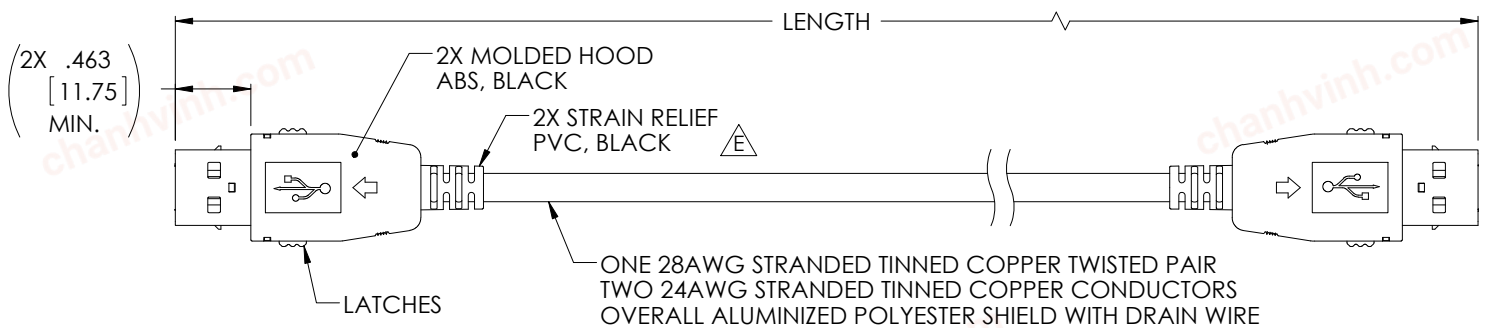

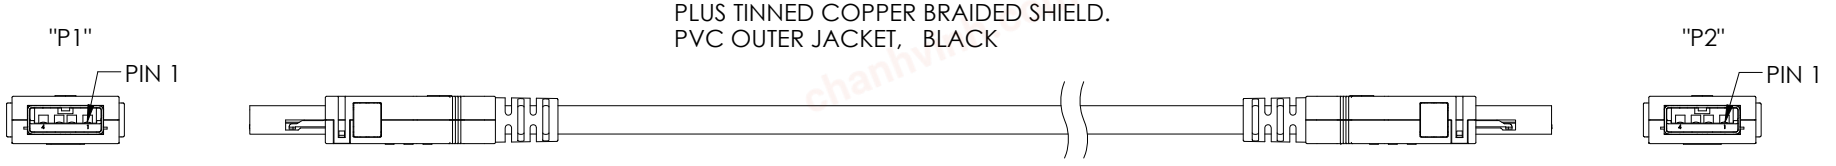

2X USB SERIES "A" LATCHING PLUG
CONTACTS: 30 µINCHES GOLD PLATING

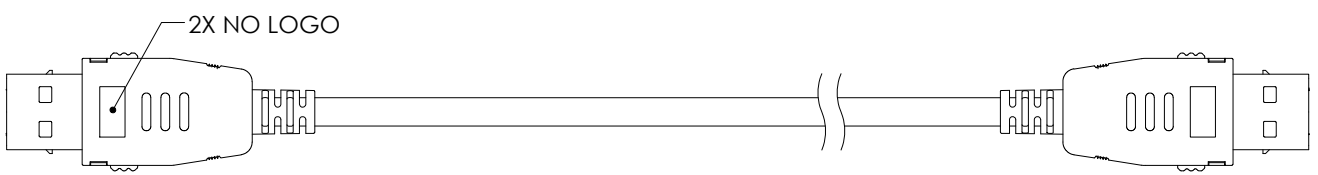

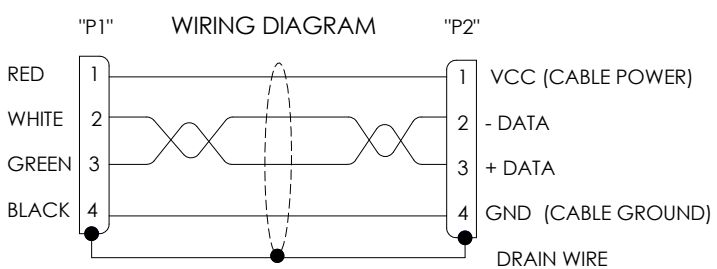

MODEL NUMBER	LENGTH METERS [FEET]
CAUALAL-03M	0.3 [.98]
CAUALAL-05M	0.5 [1.64]
CAUALAL-075M	0.75 [2.46]
CAUALAL-1M	1.0 [3.28]
CAUALAL-2M	2.0 [6.56]
CAUALAL-3M	3.0 [9.84]
CAUALAL-4M	4.0 [13.12]
CAUALAL-5M	5.0 [16.40]

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
ROHS, CE

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]

PROJECTION

APPROVALS		DATE
DRAWN BY	D.FRISIELLO	10/23/09
CHECKED BY	M.MARTINEZ	10/23/09
APPROVED BY	S.SMITH	10/23/09

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: USB

PRODUCT DESCRIPTION: CBL,USB A/A LATCHING BLK

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	CAUALAL	E

SCALE: NONE | CAD FILE: CAUALAL.SLDDRW | SHEET 1 OF 1