
chanhvinh.com

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


RoHS Compliant ✔

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/22/10	D.GRIFFIN
B	ECN 5868: ADDED LENGTHS 03 M, 075 M	12/2/11	D.FRISIELLO
C	ECN6237: ADDED CONTACT PLATING NOTE. UPDATED L-COM LOGO	09/14/12	DFP

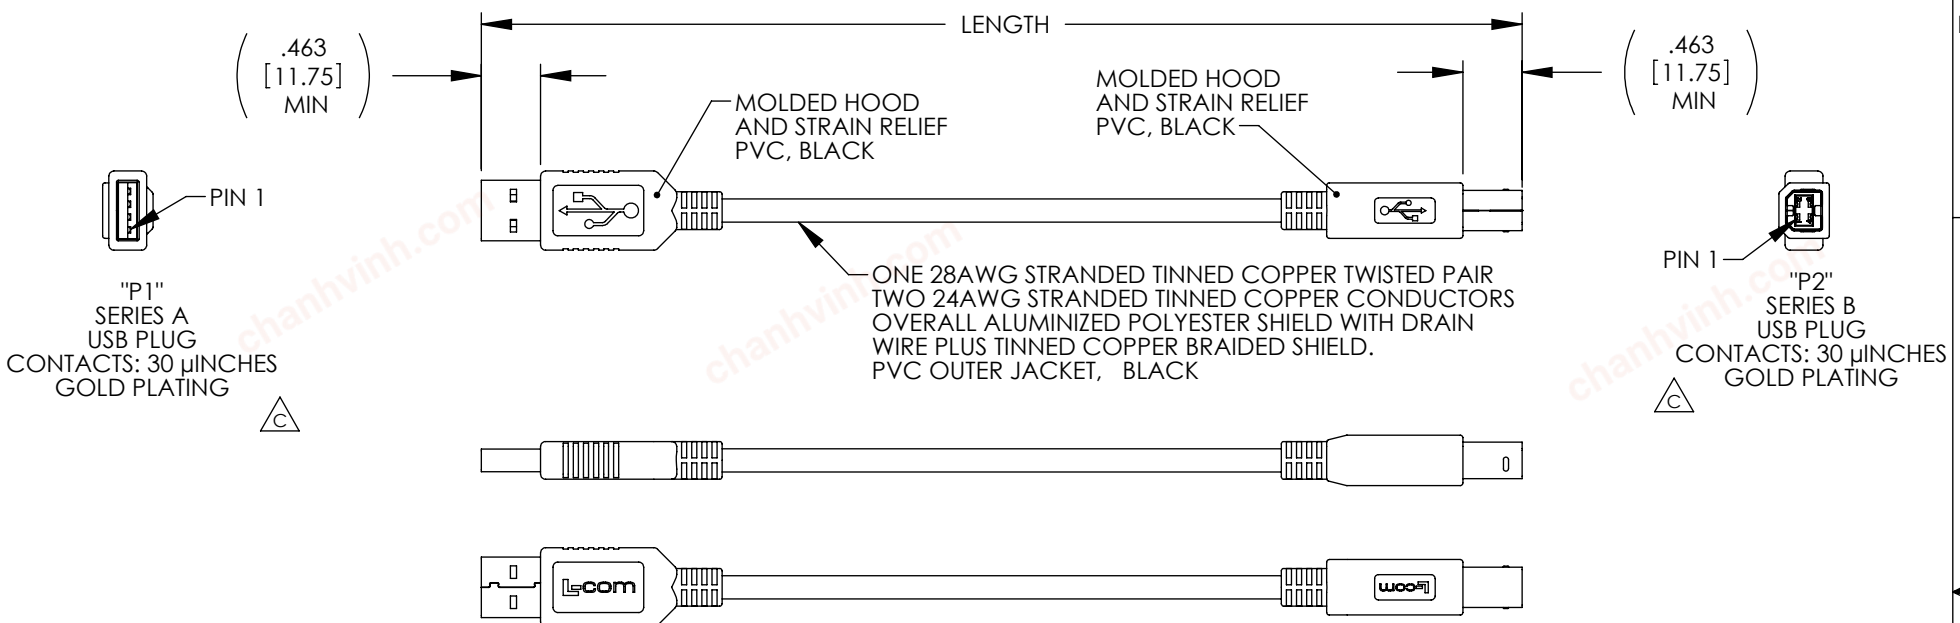

PART NUMBER	LENGTH	
	METERS	FEET
CAUBLKAB-03M	0.3	[.98]
CAUBLKAB-05M	0.5	[1.64]
CAUBLKAB-075M	0.75	[2.46]
CAUBLKAB-1M	1.0	[3.28]
CAUBLKAB-2M	2.0	[6.56]
CAUBLKAB-3M	3.0	[9.84]
CAUBLKAB-4M	4.0	[13.12]
CAUBLKAB-5M	5.0	[16.41]

"P1" WIRING DIAGRAM "P2"

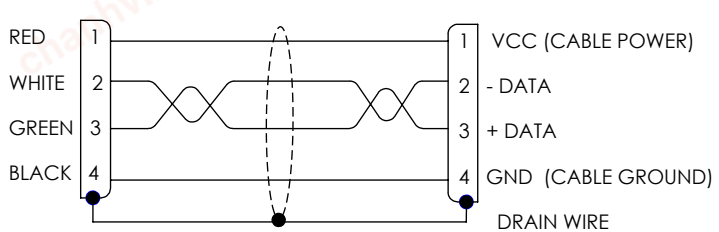

NOTES:

1. CABLE ASSEMBLIES ARE CONSTRUCTED TO MEET USB 2.0 REQUIREMENTS.
2. CABLE ASSEMBLIES SHALL HAVE 360° SHIELD TERMINATION.
3. CONNECT DRAIN WIRE TO CONNECTOR SHELLS.
4. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
5. CABLE ASSEMBLIES SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2
.XX = ± .02
.XXX = ±.005
PROJECTION

APPROVALS	DATE
DRAWN BY D. CASTRO	6/21/10
CHECKED BY D. FRISIELLO	6/21/10
APPROVED BY S. SMITH	6/21/10

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY
COLOR VARIATIONS MAY OCCUR
REF

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: USB

PRODUCT DESCRIPTION: CBL,USB A/B BLK

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	CAUBLKAB	C

SCALE: NONE | CAD FILE: CAUBLKAB.SLDDRW | SHEET 1 OF 1