

chanhvinh.com


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
J	ECN 5868: ADDED LENGTHS 03 M, 075 M, NEW FORMAT, PACKAGING NOTE	12/1/11	D.FRISIELLO
K	ECN5915: REVISED END VIEW OF USB TYPE A MALE	01/10/12	DFP
L	ECN6237: ADDED CONTACT PLATING NOTE. UPDATED FORMAT.	09/18/12	DFP
L	ECN 99999: UPDATE TO CORRECT ORIENTATION OF LOGO ON MINI B END	1/13/16	S.LI

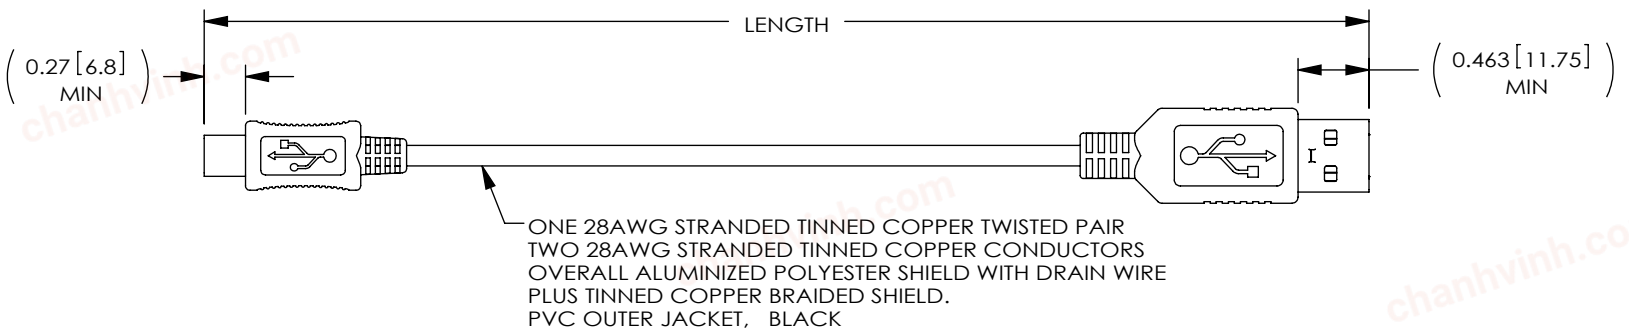

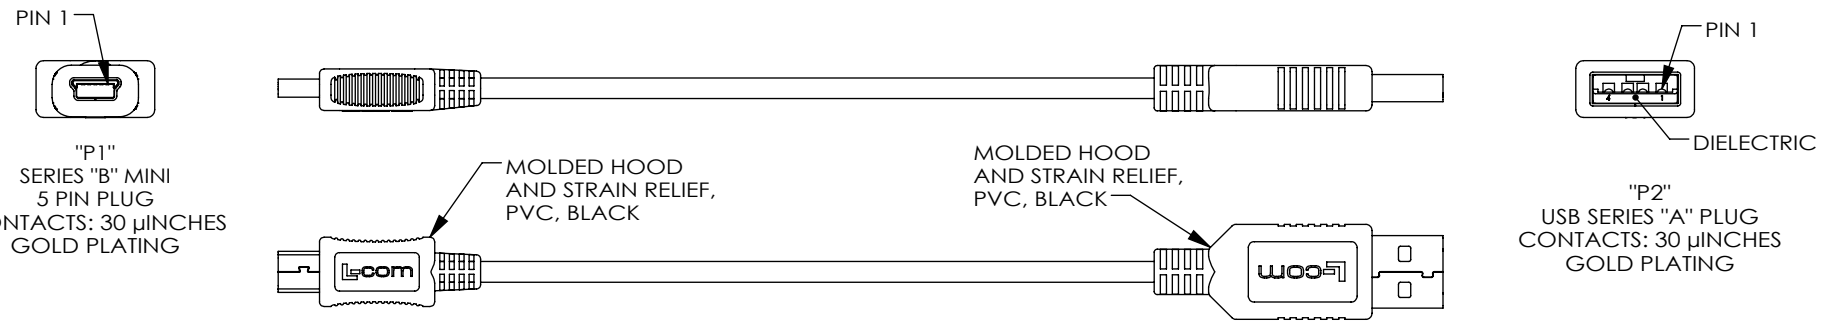

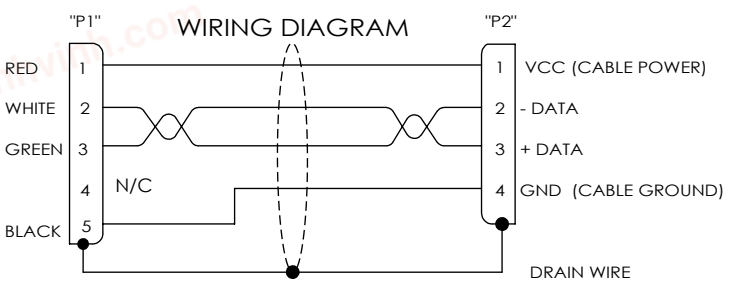

MODEL NO.	LENGTH METERS [FEET]
CSMUAMB5-03M	0.3 [.98]
CSMUAMB5-05M	0.5 [1.64]
CSMUAMB5-075M	0.75 [2.46]
CSMUAMB5-1M	1.0 [3.28]
CSMUAMB5-2M	2.0 [6.56]
CSMUAMB5-3M	3.0 [9.84]

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]
PROJECTION

APPROVALS		DATE
DRAWN BY	T.CLARK	05/21/2002
CHECKED BY	D.PARHAM	05/27/2002
APPROVED BY	R.CARRICK	05/27/2002

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
USB

PRODUCT DESCRIPTION
CABLE, USB-A/MINI-B 5POS

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	CSMUAMB5	L

SCALE: NONE | CAD FILE: CSMUAMB5.SLDDRW | SHEET 1 OF 1