
chanhvinh.com


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
A	RELEASED FOR PRODUCTION	02/11/09	DFP
B	ECN 5868: ADDED LENGTHS 03 M, 075 M, REVISED FORMAT & PACKAGING	12/8/11	D.FRISIELLO
C	ECN6237: ADDED CONTACT PLATING NOTE. UPDATED FORMAT.	09/18/12	DFP

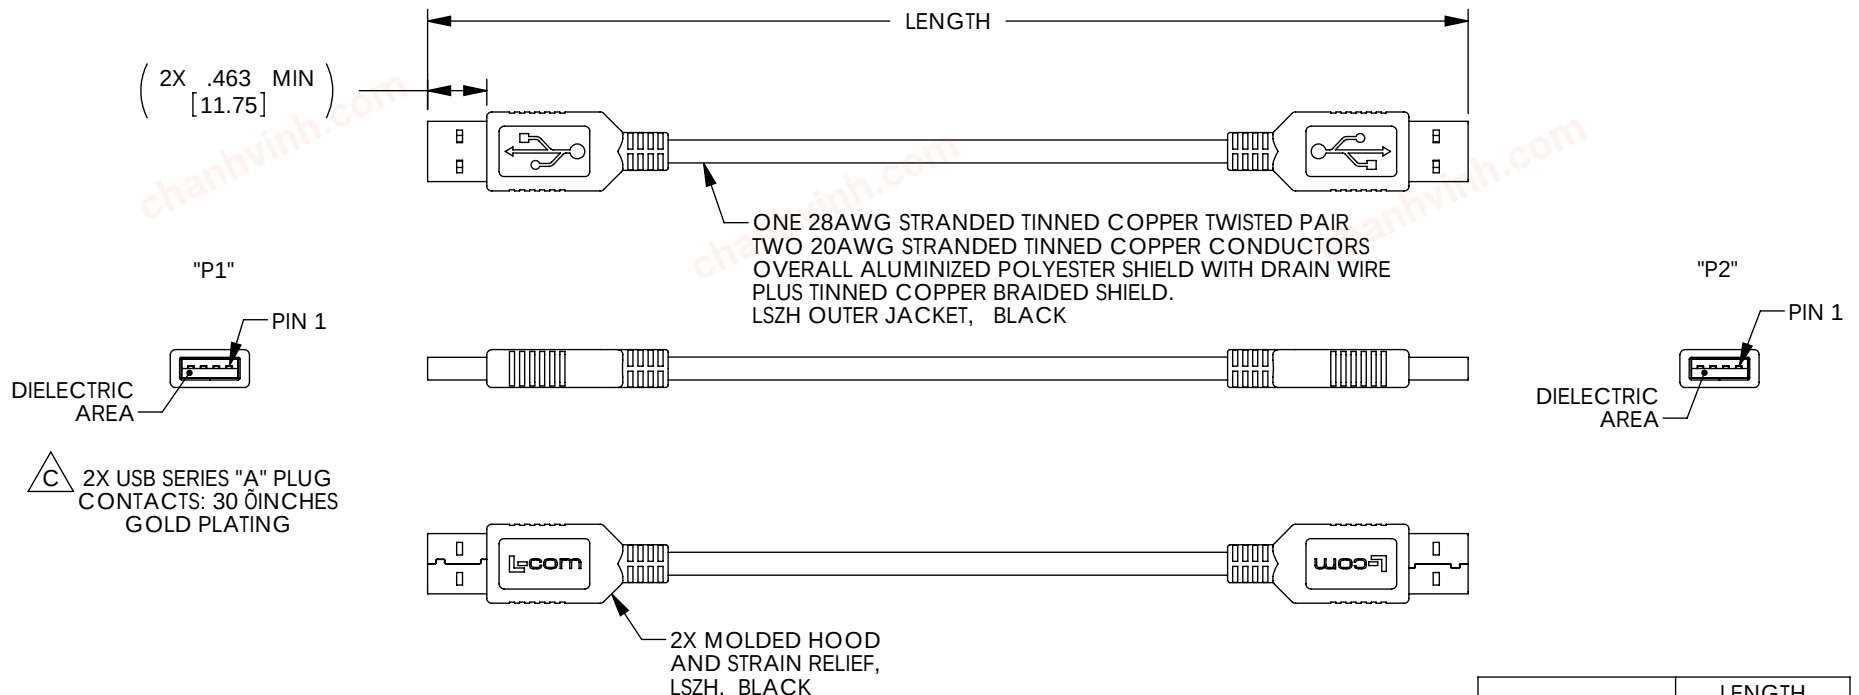

MODEL NUMBER	LENGTH METERS [FEET]
CSUZAA-03M	0.3 [.98]
CSUZAA-05M	0.5 [1.64]
CSUZAA-075M	0.75 [2.46]
CSUZAA-1M	1.0 [3.28]
CSUZAA-2M	2.0 [6.56]
CSUZAA-3M	3.0 [9.84]
CSUZAA-5M	5.0 [16.40]

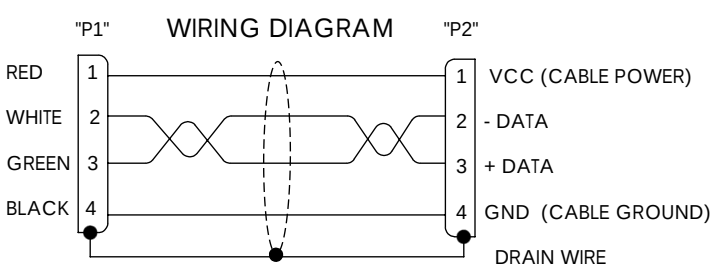

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360Á SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

RoHS Compliant

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
012 [305] = +1 [25] / -0
>12 [305] 060 [1524] = +2 [51] / -0
>60 [1524] 0120 [3048] = +4 [102] / -0
>120 [3048] 0300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = Ñ .2
.XX = Ñ .02
.XXX = Ñ.005
PROJECTION

APPROVALS	DATE
DRAWN BY D. PARHAM	02/10/2009
CHECKED BY M. MARTINEZ	02/10/2009
APPROVED BY S. SMITH	02/11/2009

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY
COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: USB

PRODUCT DESCRIPTION: CABLE, USB TYPE A/A, LSZH

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	CSUZAA	C

SCALE: NONE | CAD FILE: CSUZAA.SLDDRW | SHEET 1 OF 1