

chanhvinh.com

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/21/2021	D.GUTTADAURO

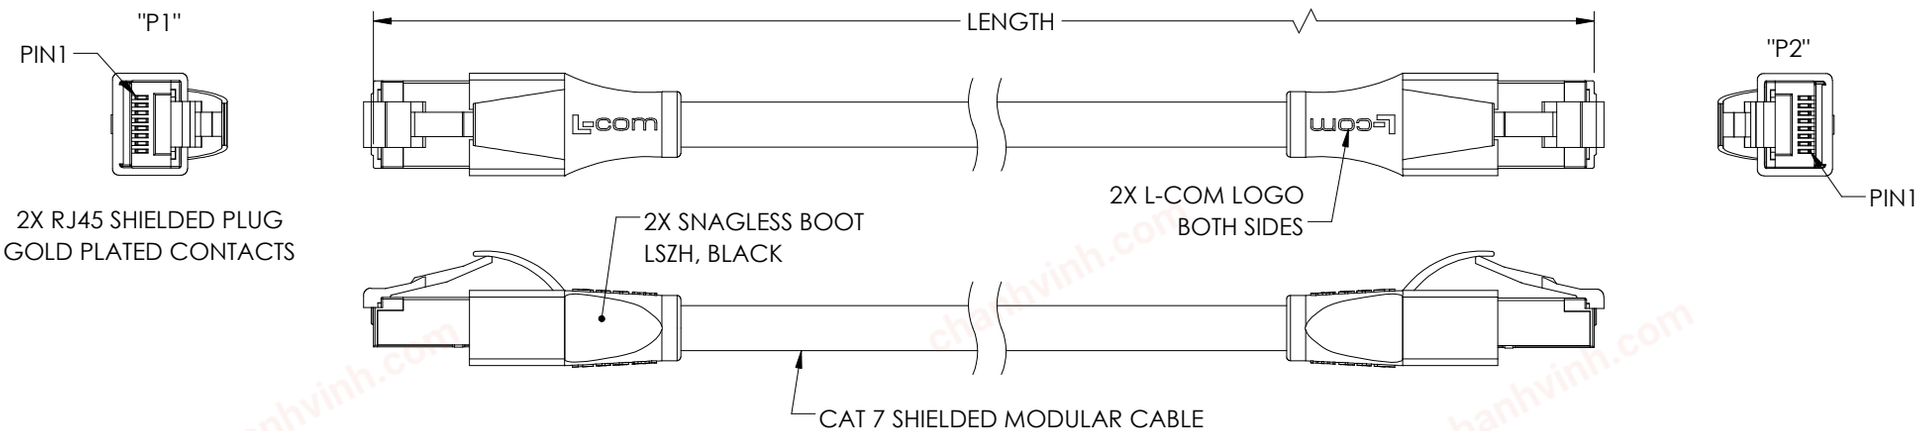

WIRING MAP

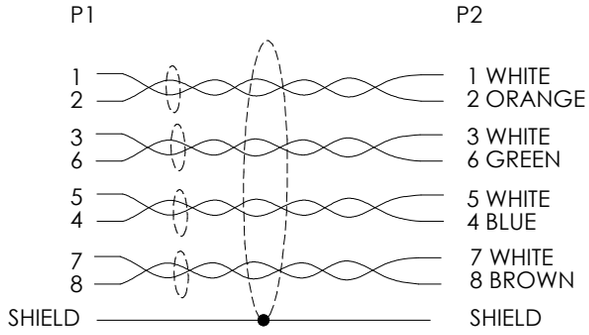

PART NUMBER	LENGTH METERS[FEET]
TRD795ZBLK-05M	0.50[1.64]
TRD795ZBLK-1M	1.0[3.28]
TRD795ZBLK-2M	2.0[6.56]
TRD795ZBLK-3M	3.0[9.84]
TRD795ZBLK-5M	5.0[16.41]
TRD795ZBLK-7.5M	7.5[24.61]
TRD795ZBLK-10M	10.0[32.81]
TRD795ZBLK-15M	15.0[49.21]

NOTES:

1.LSZH CABLE CHARACTERISTICS:
FLAME RATING: IEC 60332-1
CORROSIVE GAS: IEC 60754
SMOKE EMISSION: IEC 61034

2.LENGTHS OVER 10 METERS (32.8 FT) ARE CHANNEL RATED.

3.PLUG CONFORMS TO TIA-1096.

4.CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.

5.CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5] | FRACTIONS ± 1/32
.XX = ± .02 [.5] | ANGLES ± 1°
.XXX = ± .005 [.13]
THIRD-ANGLE PROJECTION

APPROVALS	DATE
DRAWN BY B.ZHANG	12/04/2020
CHECKED BY SPAN	12/04/2020
APPROVED BY DGUTTADAUR	12/04/2020

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-com an INFINITE brand
50 High Street, West Mill,
North Andover, MA 01845 USA.
Phone: 1.800.341.5266
1.978.682.6936

CATEGORY
TELECOM/MODULAR

PRODUCT DESCRIPTION
CA,CAT7 S/FTP RJ45 TO RJ45 LSZH JKT,BLK

SIZE	CAGE CODE	DWG. NO.	REV.
A	43321	TRD795ZBLK	A

SCALE: NONE | CAD FILE: TRD795ZBLK.SLDDRW | SHEET 1 OF 1

T-Rev.D