

chanhvinh.com

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS

REV	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	12/07/2018	SLI

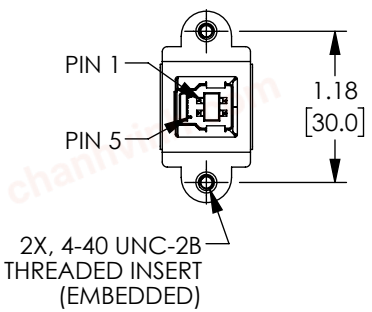


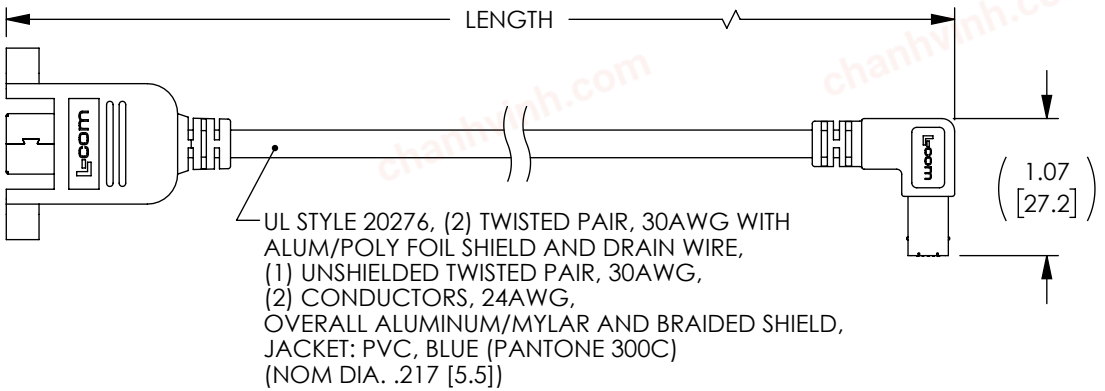


"J1"
USB 3.0 SERIES "B" JACK
PANEL MOUNT
CONTACTS 30µ GOLD

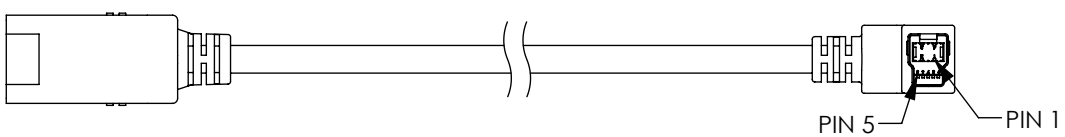


"P1"
USB 3.0 SERIES "B"
RIGHT ANGLE PLUG
CONTACTS 30µ GOLD

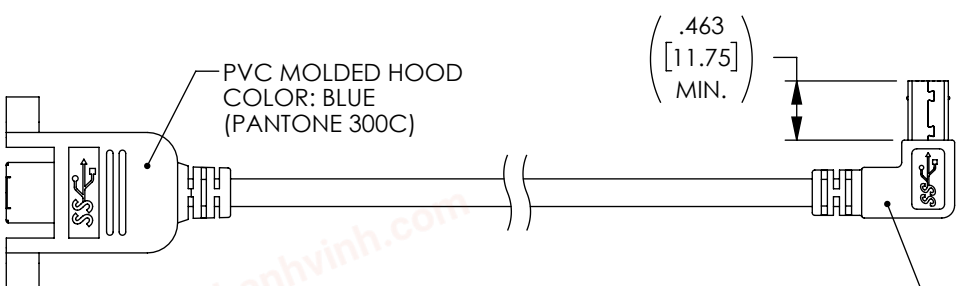

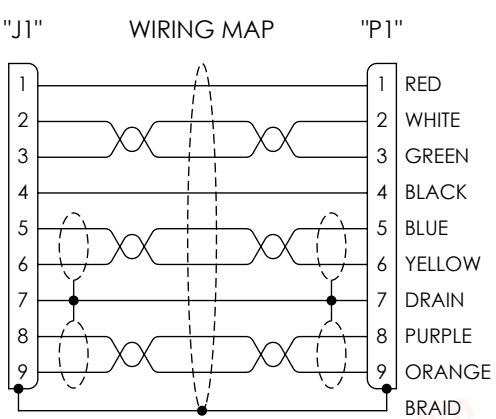

PART NUMBER	LENGTH METERS [FEET]
U3A00102-03M	0.3 [.98]
U3A00102-05M	0.5 [1.64]
U3A00102-1M	1.0 [3.28]

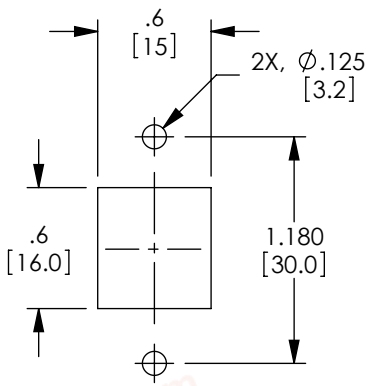

RECOMMENDED
PANEL CUTOUT

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]

PROJECTION

APPROVALS	DATE
DRAWN BY SLI	03/28/2018
CHECKED BY BZHANG	03/28/2018
APPROVED BY SPAN	03/28/2018

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
50 HIGH STREET
NORTH ANDOVER, MA
01845

CATEGORY
USB

PRODUCT DESCRIPTION
CA,USB3.0 B-F PNL/90RT B-M

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	U3A00102	A

SCALE: NONE | CAD FILE: U3A00102.SLDDRW | SHEET 1 OF 1