


chanhvinh.com


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	2/8/12	D.GRIFFIN
B	ECN5976: CORRECTED JACK ORIENTATION	02/15/12	DFP
C	ECN 7494: CLARIFIED WIRE MAP. UPD ROHS, FORMAT, DWG LAYOUT	7/25/14	D. DESJARDIN

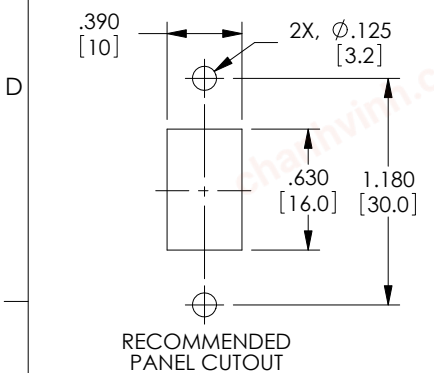

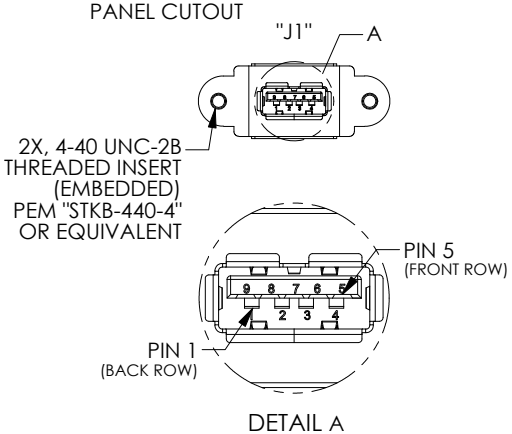

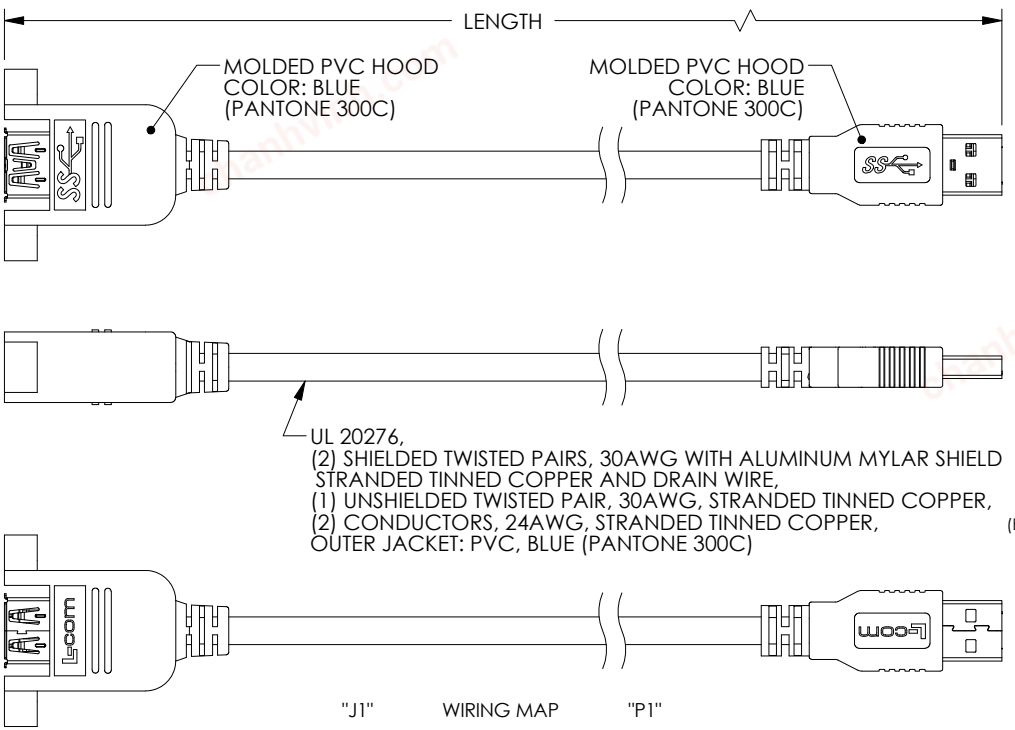

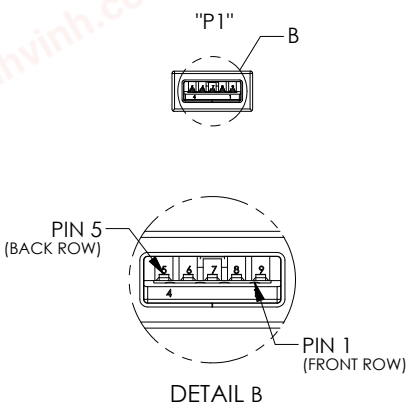

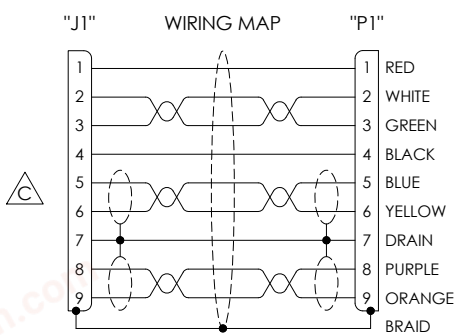

NOTES:

MATERIAL:
SERIES "A" JACK:
PANEL MOUNT HOUSING: PVC
CONNECTOR PLASTIC: (BLUE) PBT WITH GLASS FIBER
CONNECTOR CONTACTS: BRASS
CONNECTOR SHELL: SUS

SERIES "A" PLUG:
CONNECTOR SHELL: SPCC
CONNECTOR PLASTIC: (BLUE) PBT WITH GLASS FIBER,UL94V-0
CONNECTOR CONTACTS: PHOSPHOR BRONZE

FINISH:
CONNECTOR CONTACTS: GOLD, 30µINCHES
CONNECTOR SHELL: NICKEL

ENVIRONMENTAL:
OPERATING TEMPERATURE: -20˚C TO +80˚C

MISCELLANEOUS:
CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031

C **REGULATORY COMPLIANCE:**
CE2011/65/EU(RoHS DIRECTIVE)

PART NUMBER	LENGTH METERS [FEET]
UPMAA-30-03M	0.3 [0.98]
UPMAA-30-05M	0.5 [1.64]
UPMAA-30-1M	1.0 [3.28]
UPMAA-30-2M	2.0 [6.56]
UPMAA-30-3M	3.0 [9.84]

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]

PROJECTION

APPROVALS		DATE
DRAWN BY	D. PARHAM	09/22/2011
CHECKED BY	D. CASTRO	09/22/2011
APPROVED BY	S. SMITH	09/27/2011

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
USB

PRODUCT DESCRIPTION
CA USB 3.0 A PNL/AM

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	UPMAA-30	C

SCALE: NONE | CAD FILE: UPMAA-30.SLDDRW | SHEET 1 OF 1