chanhvinh.com

10102900	DATA SHEET	LAPP
Valid from: 12.06.2026	EPIC® H-B 24 AG-LB	

Description

- Ideal for many applications due to a wide range of housings and inserts



General Characteristics

Series	H-B 24
Version	Panel mount base
Locking	Single lever
Protection (DIN EN 60529)	IP 65 (latched)
Temperature Range	-40°C to +125°C

Materials and Surfaces

Housing	Aluminium alloy, powder-coated, grey
Lever	Steel, galvanized
Sealing	NBR

Approvals

UL File Number	In preparation

Standard


Safety Standard	IEC 61984

We reserve all rights according to DIN ISO 16016.

chanhvinh.com

10102900	DATA SHEET	LAPP
Valid from: 12.06.2026	EPIC® H-B 24 AG-LB	

Technical Drawings

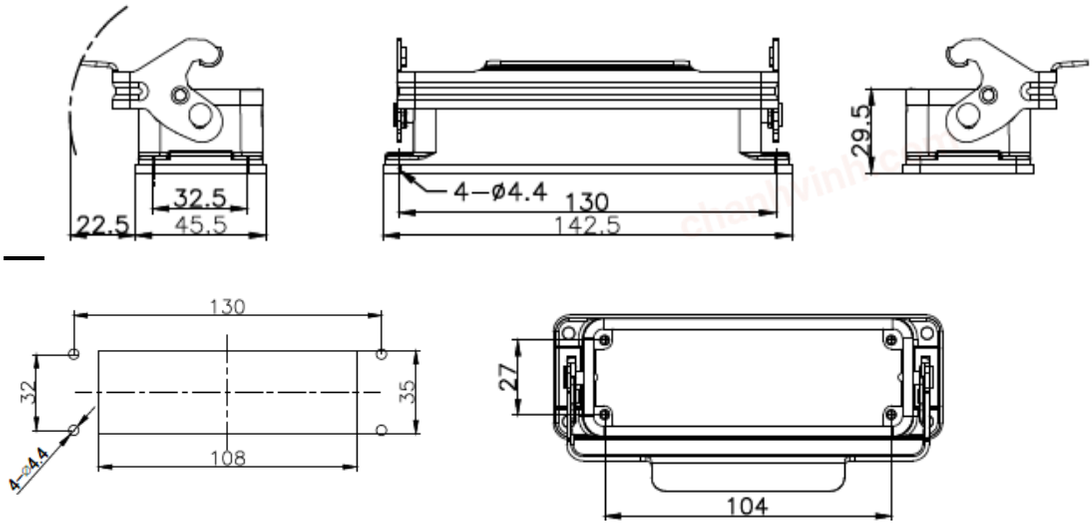

Automation

Industrial machinery and plant engineering

Mechanical resistance

Robust

Waterproof

Info

Universal, robust metal housings size H-B 24

Application range

Plant engineering
Light & sound technology
Plastics industry

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

We reserve all rights according to DIN ISO 16016.