chanhvinh.com

10426500	DATA SHEET	LAPP
Valid from: 20.11.2024	EPIC® H-A 3 MTG	

Description

- Innovative metal housing
- For safe connections in the smallest possible space



General characteristics

Series	H-A 3
Version	Hood
Locking mechanism	Bolts for single lever
Cable entry	Straight
Cable gland	See table
Clamping range	See table
Protection rating (DIN EN 60529)	IP 66 (latched) IP 68 - 1 meter / 10 hours (latched)
Protection rating (NEMA 250, UL50E)	4, 12 (latched)
Temperature range	-40 °C to +100 °C, short-term up to +125 °C

Materials and surfaces

Housing, base material	Zinc die-casting
Housing, surface	Powder-coating, grey
Pressure screw	Brass, nickel-plated
Pressure washer	Steel, zinc-plated
Sealing ring	NBR (Pg 11), CR (M20)

Standard

Safety Standard	IEC 61984, UL50E

Approvals

UL-Approval, E-File-Number	E75770

Versions


Article number	Article description	Thread	Cable gland	Clamping range	Dimension C
10512100	EPIC® H-A 3 MTG 11 N.GEW. HOOD	Pg 11	No	-	50,2
10426500	EPIC® H-A 3 MTG 11 KPL. HOOD	Pg 11	Yes	6,5 – 12 mm	57
19512100	EPIC® H-A 3 MTG M20 N.GEW. HOOD	M20	No	-	50,2
19426500	EPIC® H-A 3 MTG M20 KPL. HOOD	M20	Yes	3 - 13,5 mm	58

We reserve all rights according to DIN ISO 16016.

chanhvinh.com

10426500	DATA SHEET	LAPP
Valid from: 20.11.2024	EPIC® H-A 3 MTG	

Technical Drawings

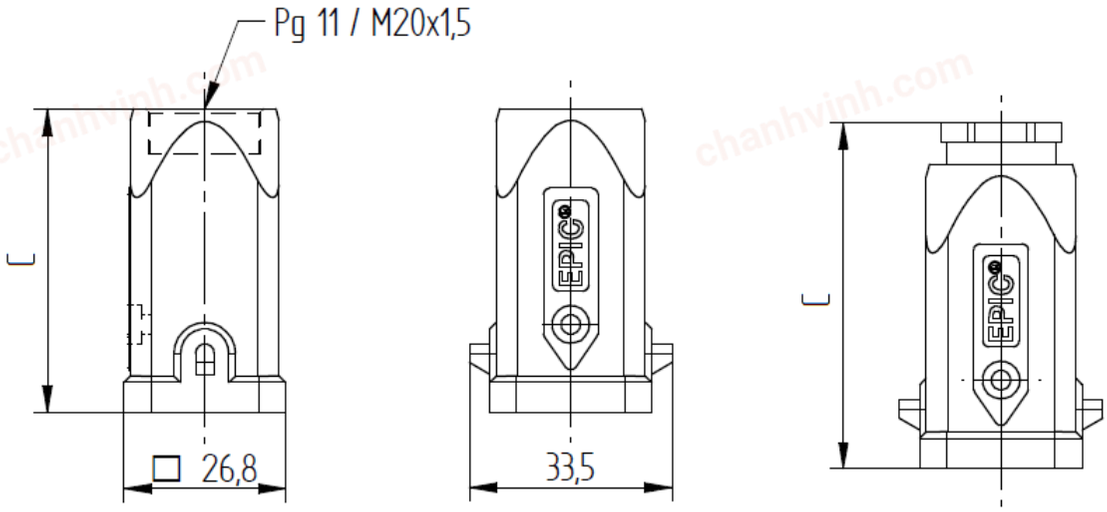

Industrial machinery and plant engineering

Mechanical resistance

Robust

Waterproof

Info

Compact, robust metal housings size H-A 3

Application range

Machine and equipment manufacturing
Control engineering
Electronic laboratory

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

We reserve all rights according to DIN ISO 16016.