chanhvinh.com

Lovato electric
ENERGY AND AUTOMATION

LPCB2104

PUSHBUTTON ACTUATOR, SPRING RETURN, WITH SYMBOL Ø22MM PLATINUM SERIES CHROMED PLASTIC, EXTENDED, 0/RED



General characteristics

Colour		Red
Type of positions		Extended pushbutton
Material		Polyamide
IEC degree of protection		IP66, IP67 and IP69K

Mechanical features

Operating force	kg-lb	<0.5Kg / 1.1lb
Mechanical life	cycles	5000000
Fixing		Without mounting adapter
Mounting adapter		LPXAU120
Weight	g	27

UL technical data


UL degree of protection	Type1, 2, 3R, 4, 4X, 12, 12K

Ambient conditions

Temperature

Operating temperature			
	min	°C	-25
	max	°C	+70
Storage temperature			
	min	°C	-40
	max	°C	+85

Dimensions

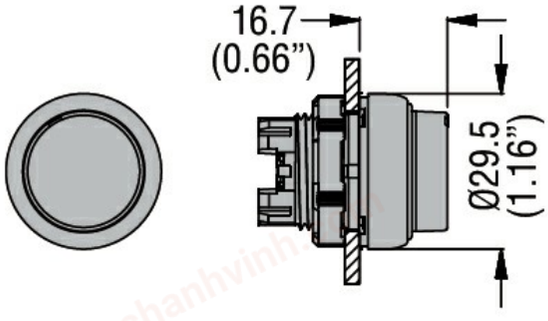

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1
UL508

Certificates

CCC
cULus

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

chanhvinh.com

LPCB2104

PUSHBUTTON ACTUATOR, SPRING RETURN, WITH SYMBOL Ø22MM PLATINUM SERIES CHROMED PLASTIC, EXTENDED, 0/RED

EAC	
RINA	

ETIM classification

ETIM 8.0	EC000221 - Front element for push button

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding