chanhvinh.com

LPCB7233

DOUBLE-TOUCH ACTUATOR, SPRING RETURN Ø22MM PLATINUM SERIES CHROMED PLASTIC, 1 EXTENDED AND 1 FLUSH PUSHBUTTONS. BOTH SPRING RETURN, GREEN - RED/START - STOP



General characteristics

Colour			Green/Red
Type of positions			Double-touch with one extended and one flush pushbuttons
Material			Polyamide
IEC degree of protection			IP66, IP67 and IP69K

Mechanical features

Operating force		kg-lb	<0.5Kg / 1.1Ib
Mechanical life		cycles	1000000
Mounting adapter			LPXAU120
Weight		g	30

UL technical data


UL degree of protection			Type1, 2, 3R, 4, 4X, 12, 12K

Ambient conditions

Temperature

Operating temperature			
	min	°C	-25
	max	°C	+70
Storage temperature			
	min	°C	-40
	max	°C	+85

Dimensions

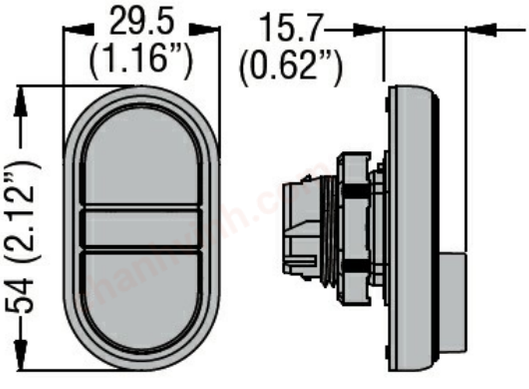

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1
UL508

Certificates

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

chanhvinh.com

LPCB7233

DOUBLE-TOUCH ACTUATOR, SPRING RETURN Ø22MM PLATINUM SERIES CHROMED PLASTIC, 1 EXTENDED AND 1 FLUSH PUSHBUTTONS. BOTH SPRING RETURN, GREEN - RED/START - STOP

CCC
cULus
EAC
RINA

ETIM classification

ETIM 8.0	EC000221 - Front element for push button

chanhvinh.com

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding