chanhvinh.com

# LPCB7355

TRIPLE-TOUCH ACTUATOR, SPRING RETURN Ø22MM PLATINUM SERIES CHROMED PLASTIC, 2 EXTERNAL FLUSH AND 1 MIDDLE EXTENDED PUSHBUTTONS. SPRING RETURN, ↑ - STOP - ↓




## General characteristics

| | | |
|---|---|---|
| Colour | | Green/Red/Green |
| Type of positions | | Triple-touch |
| Material | | Polyamide |
| IEC degree of protection | | IP66, IP67 and IP69K |

## Mechanical features

| | | |
|---|---|---|
| Operating force | kg-lb | <0.5Kg / 1.1lb |
| Mechanical life | cycles | 1000000 |
| Mounting adapter | | LPXAU120 |
| Weight | g | 30 |

## UL technical data


| | | |
|---|---|---|
| UL degree of protection | | Type1, 2, 3R, 4, 4X, 12, 12K |

## Ambient conditions

Temperature

| | | | |
|---|---|---|---|
| Operating temperature | | | |
| | min | °C | -25 |
| | max | °C | +70 |
| Storage temperature | | | |
| | min | °C | -40 |
| | max | °C | +85 |

## Dimensions

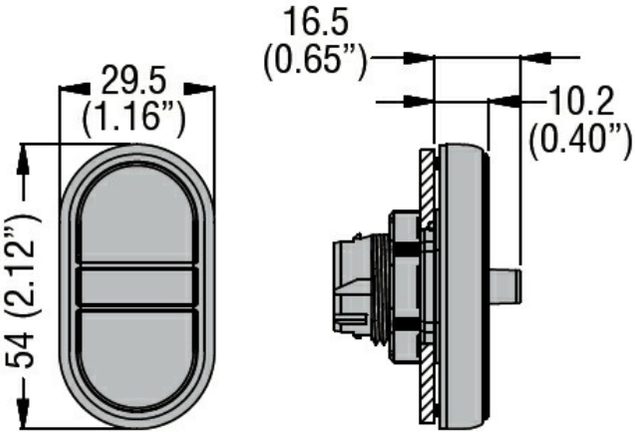


## Certifications and compliance

Compliance

- CSA C22.2 n° 14
- IEC/EN/BS 60947-1
- IEC/EN/BS 60947-5-1
- UL508

Certificates

- CCC
- cULus


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

chanhvinh.com

# LPCB7355

TRIPLE-TOUCH ACTUATOR, SPRING RETURN Ø22MM PLATINUM SERIES CHROMED PLASTIC, 2 EXTERNAL FLUSH AND 1 MIDDLE EXTENDED PUSHBUTTONS. SPRING RETURN, ↑ - STOP - ↓

| | |
|---|---|
| EAC | |
| RINA | |

## ETIM classification

| | |
|---|---|
| ETIM 8.0 | EC000221 - Front element for push button |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding