chanhvinh.com

LPCZSBIP

CONTINUOUS OR PULSE-TONE MONOBLOCK BUZZER Ø22MM PLATINUM SERIES, 18-30VAC/DC, IP66, IP67, IP69K, UL TYPE 4X - 80DB



Product designation			Monoblock buzzer - Continous or pulse tone
Product type designation			LPCZS
General characteristics			
Material			Polyamide
IEC degree of protection			IP66, IP67; IP96K on front and IP20 on rear
Electrical characteristics			
Rated impulse withstand voltage Uimp		kV	4
Rated frequency		Hz	50-60
Supply voltage (AC)		V	18…30
Supply voltage (DC)		V	18…30
Mechanical features			
Tightening torque for terminals max		Nm	0.5
Screwdriver			Flat-head: 0.6x3.5mm/0.02x0.
Conductor section			
	AWG/kcmil conductor section		
	min		24
	max		14
	IEC		
	min	mm²	0.5
	max	mm²	2.5
Weight		g	20
UL technical data			
UL degree of protection			1, 2, 3R, 4, 4X, 12, 12K on front
Ambient conditions			
Temperature			
	Operating temperature		
	min	°C	-25
	max	°C	+70
	Storage temperature		
	min	°C	-40
	max	°C	+85

Dimensions

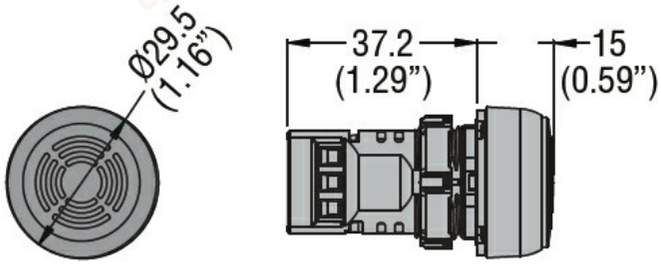

Wiring diagrams

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

chanhvinh.com

LPCZSBIP

CONTINUOUS OR PULSE-TONE MONOBLOCK BUZZER Ø22MM PLATINUM SERIES, 18-30VAC/DC, IP66, IP67, IP69K, UL TYPE 4X - 80DB

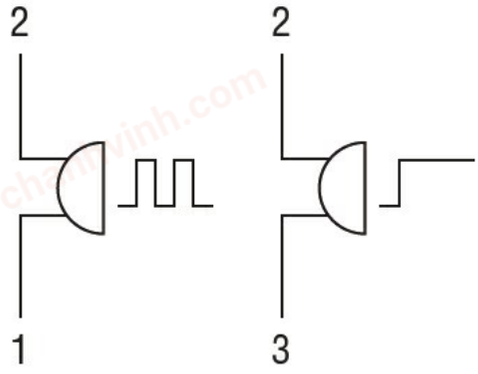

Certifications and compliance

Compliance	
	IEC/EN 60947-1
	IEC/EN 60947-5-1
Certificates	
	cULus

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding