chanhvinh.com

LPL6

PILOT LIGHT HEAD Ø22MM PLATINUM SERIES CHROMED PLASTIC, BLUE. WITHOUT MOUNTING ADAPTER



General characteristics

Colour			Blue
Material			Polyamide
IEC degree of protection			IP66, IP67 and IP69K

Mechanical features

Mounting adapter			LPXAU120
Weight		g	24

UL technical data


UL degree of protection			Type1, 2, 3R, 4, 4X, 12, 12K

Ambient conditions

Temperature

Operating temperature			
	min	°C	-25
	max	°C	+70
Storage temperature			
	min	°C	-40
	max	°C	+85

Dimensions

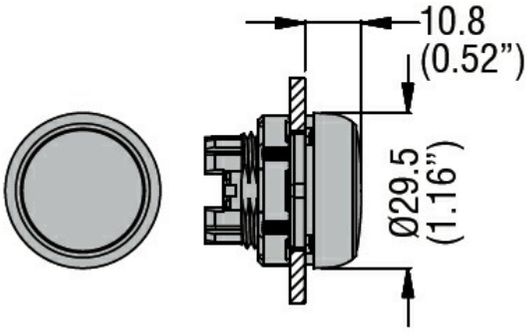

Certifications and compliance

Compliance

- CSA C22.2 n° 14
- IEC/EN/BS 60947-1
- IEC/EN/BS 60947-5-1
- UL508

Certificates

- CCC
- cULus
- EAC
- RINA

ETIM classification

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

chanhvinh.com

LPL6

PILOT LIGHT HEAD Ø22MM PLATINUM SERIES CHROMED PLASTIC, BLUE. WITHOUT MOUNTING ADAPTER

ETIM 8.0

EC002024 - Accessories/spare parts for command devices

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding