



Product designation	MINIATURE RELAYS		
Product type designation	HR302C		
Contact characteristics			
Contact configuration	2 C/O		
Rated insulation voltage Ui IEC/EN	V	250	
Rated impulse withstand voltage Uimp	kV	6	
IEC Conventional free air thermal current Ith	A	8	
Maximum instantaneous current	A	20	
Rated current (In)	A	8	
Relay control voltage	V	110...120VAC	
Max contrallable power in	AC-1	W	2000
	AC-15	VA	150
Rated operating power AC-1		VA	2000
Rated operating power AC-15	230 VAC	VA	150
Single-phase motor control	230VAC	kW	0.2
Rated operating current DC-1	30V	A	8
	110V	A	0.3
	220V	A	0.1
Minimum switching load	V / mA	5 / 100	
Contact impedance	mΩ	100	
Contact material	AgSnO2		
Operating times			
Closing	ms	10	
Opening	ms	5	
Operations			
Mechanical life	cycles	10000000	
Electrical life AC1	cycles	50000	
Coil characteristics			
Average coil consumption AC at 20°C	VA	0.9	
Average coil consumption DC at 20°C	W	0.45	
Operating range	Closing	% Un	70...110
	Opening	% Un	20...55
Maximum cycle frequency	cycles/h	3600	
Mechanical features			
Max socket terminal tightening torque	Nm	0.6	
Socket screw tightening tool (cross / flat blade)	PH1 / 4.5mm		
Conductor section	AWG/Kcmil		

HR302CA110

Miniature relay, 110/120VAC, 8A, 2C/O contact. Fitting on socket HR5XS2...

	min	20	
	max	14	
IEC			
	min	mm ²	0.5
	max	mm ²	2.5

Operating position	normal	Any
Fixing	On 35mm DIN rail and with screw	



Ambient conditions

Temperature				
Operating temperature		min	°C	-40
		max	°C	+85
<hr/>				
Storage temperature		min	°C	-40
		max	°C	+85


Other features

Indication	No
Mechanical contact position indicator	No
Mechanical test actuator	No

Dimensions

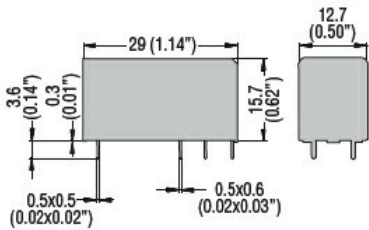

Wiring diagrams



Certifications and compliance

Compliance	IEC/EN 61810
Certificates	CSA
	cULus
	cURus



HR302CA110

Miniature relay, 110/120VAC, 8A, 2C/O contact. Fitting on socket HR5XS2...

EAC
VDE

ETIM classification

ETIM 8.0	EC001437 - Switching relay
----------	-------------------------------