chanhvinh.com


LPCB7191

Double-touch actuator, spring return Ø22mm Platinum series chromed plastic, 2 flush pushbuttons. Both spring return, Black - Black/↑ - ↓



Product designation			Double-touch actuators, spring return - two flush pushbuttons
Product type designation			LPCB71
General characteristics			
Colour			Black/Black
Type of positions			↑ - ↓
Material			Polyamide
IEC degree of protection			IP66, IP67 and IP69K
Mechanical features			
Operating force		kg-lb	<0.5Kg / 1.1Ib
Mechanical life		cycles	1000000
Mounting adapter			LPXAU120
Weight		g	30
UL technical data			
UL degree of protection			Type1, 2, 3R, 4, 4X, 12, 12K
Ambient conditions			
Temperature			
	Operating temperature		
	min	°C	-25
	max	°C	+70
	Storage temperature		
	min	°C	-40
	max	°C	+85

Dimensions

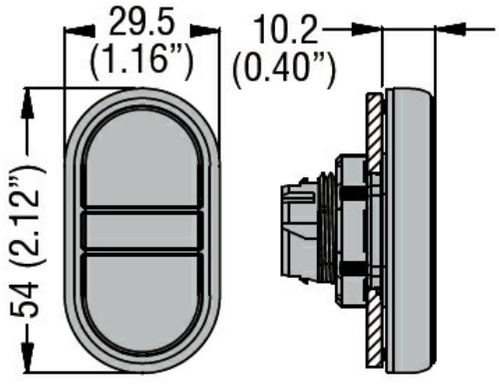

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1
UL508

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

chanhvinh.com

LPCB7191

Double-touch actuator, spring return Ø22mm Platinum series chromed plastic, 2 flush pushbuttons. Both spring return, Black - Black/↑ - ↓

Certificates

CCC
cULus
EAC
RINA

ETIM classification

ETIM 8.0	EC000221 - Front element for push button

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding