chanhvinh.com

Lovato electric
ENERGY AND AUTOMATION

M3N

EMPTY NON-METALLIC ENCLOSURE, WITHOUT EXTERNAL PUSHBUTTONS, FOR BF40...BF80 CONTACTORS



Product designation			Empty enclosures
Product type designation			M3N
Electrical features			
Maximum operating current (≤440V)		A	80
Components			
Contactor standard supplied			BF40A, BF50A, BF65A, BF80A, BF94A
Thermal relay to purchase separately			RF82
Mechanical features			
Weight		g	1800
Ambient conditions			
Operating temperature			
	min	°C	-25
	max	°C	+60
Storage temperature			
	min	°C	-40
	max	°C	+70
Resistance & Protection			
Frontal IP degree			IP65
Dimensions			

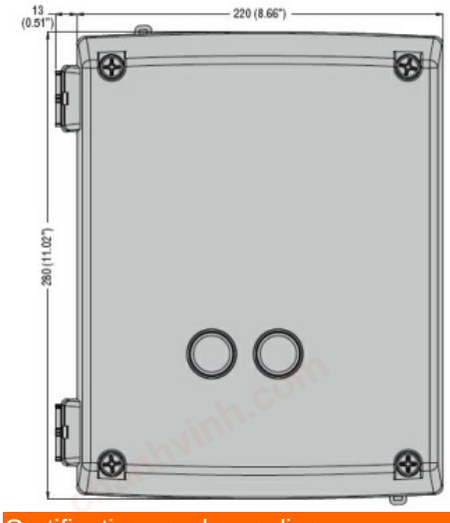

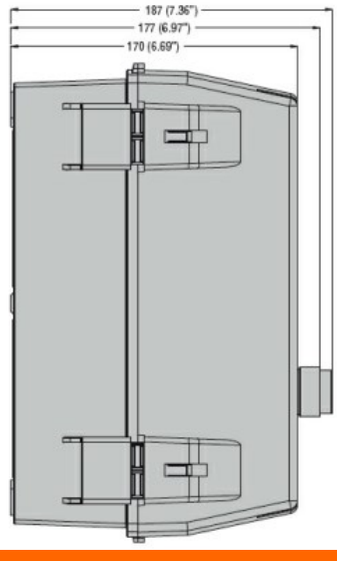

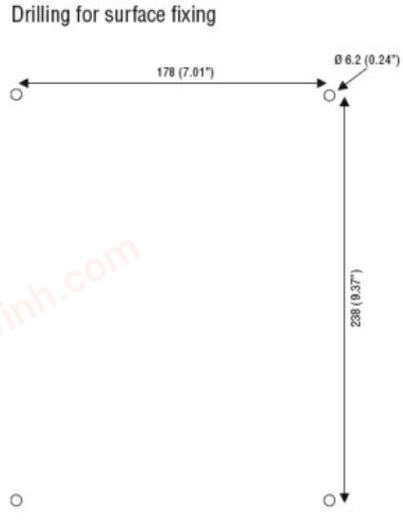

Certifications and compliance		
Compliance		
	IEC/EN 60947-1	
	IEC/EN 60947-4-1	
ETIM classification		

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

chanhvinh.com

M3N

EMPTY NON-METALLIC ENCLOSURE, WITHOUT EXTERNAL PUSHBUTTONS, FOR BF40...BF80 CONTACTORS

ETIM 8.0

EC000200 - Enclosure for control circuit devices

chanhvinh.com

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding