chanhvinh.com

DC-DC Step-Up Constant Current LED driver

LDH-65 series



(Pin mounted style)



(Lead wire style)

■ Features

- Wide DC input voltage operation 9.5~32V
- DC/DC step-up converter
- Constant current output : 700mA to 1750mA
- Wide output LED forward voltage up to 80V DC
- High efficiency up to 96%
- 2 in 1dimming (0-10V,PWM)
- Protections: Short circuit / Over voltage
- Cooling by free air convection
- Fully encapsulated
- 3 years warranty

■ Applications

- DC battery source lighting
- Portable lighting
- LED solar street lighting
- LED greehouse lighting
- LED Low-bay lighting

■ Description

LDH-65 series is a 65W DC/DC LED driver featuring constant current output. LDH-65 operates from 9.5～32VDC and offers models with different rated current ranging between 700mA and 1750mA. With the high efficiency up to 96%, The 94V-0 flame retardant plastic case the fully-potted silicone enhance the heat dissipation allows this series to fit solar LED street light. LDH-65 is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for DC source LED lighting system.

■ Model Encoding

LDH - 65 - 700 W

- Blank : Pin mounted style
- W : Lead wire style

- Output Current (700/1050/1400/1750mA)
- Rated wattage
- Series name

chanhvinh.com

DC-DC Step-Up Constant Current LED driver LDH-65 series

SPECIFICATION

MODEL		LDH-65-700☐		LDH-65-1050☐		LDH-65-1400☐		LDH-65-1750☐	
OUTPUT	RATED CURRENT	700mA		1050mA		1400mA		1750mA	
	CURRENT ACCURACY(Typ.)	±5% at 12VDC input and 24VDC input							
	VOLTAGE RANGE Note.2	12.5~80VDC		12.5~60VDC		12.5~46VDC		12.5~37VDC	
	RATED POWER	56.0W		63.0W		64.4W		64.75W	
	CURRENT RIPPLE	5%(@rated current)							
INPUT	VOLTAGE RANGE Note.2	9.5~32VDC							
	EFFICIENCY (Typ.)	91%/12V	95%/24V	91.5%/12V	95.5%/24V	92%/12V	95%/24V	92.5%/12V	96%/24V
	DC CURRENT (Typ.)	6.2A/12VDC, 3.1A/24VDC							
DIMMING	DIMMING FUNCTION Note.2	Leave open if not used							
		1KHz-3KHz 10V PWM signal or 0-10V DC input							
	QUIESCENT INPUT CURRENT IN SHUTDOWN MODE(Typ.)	10mA when PWM dimming OFF @12VDC							
PROTECTION	SHORT CIRCUIT	Output short circuit, the power supply will be damaged							
	OVER VOLTAGE	81~120V		61~100V		47~80V		38~60V	
	NO LOAD	Output voltage rise to OVP, and drop equal to input voltage, re-power to recovery							
ENVIRONMENT	WORKING TEMP.	-40 ~ +60℃ (Refer to "Derating Curve")							
	WORKING HUMIDITY	20 ~ 90% RH non-condensing							
	STORAGE TEMP., HUMIDITY	-40 ~ +85℃, 10 ~ 95% RH							
	TEMP. COEFFICIENT	±0.03%/℃ (0 ~ 50℃)							
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes							
SAFETY & EMC	SAFETY STANDARDS	IEC 61347-1, IEC 61347-2-13, EAC TP TC 004 approved							
	EMC EMISSION Note.5	Compliance to EN55015;EAC TP TC 020							
	EMC IMMUNITY	Compliance to EN61547,EN61000-4-2,3,4,6,8; light industry level, criteria A;EAC TP TC 020							
OTHERS	MTBF	3067. 44K hrs min. Telcordia TR/SR-332(Bellcore); 874.98 Khrs min. MIL-HDBK-217F (25℃)							
	DIMENSION	75*53*22.7mm (L*W*H)							
	PACKING	Pin mounted style: 152g; 100pcs/15.2kg/0.86CUFT Lead wire style: 159g; 100pcs/15.9kg/1.07CUFT							
NOTE	1.All parameters are specified at normal input(12VDC), rated load, 25℃ 70% RH ambient. 2.Non dimming application: Output voltage must step up by 3 volts from input DC voltage Dimming application: Output voltage must be twice higher than the input DC voltage If input voltage down below 11, the output current may drop to more than 80% of the rated current 3.This series meets the typical life expectancy of >35,000 hours of operation when Tcase, particularly tc point (or TMP, per DLC), is about 80℃ or less. 4.The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft). 5.EN55015 EMI testing layout is based on DC input with a battery source.								

chanhvinh.com

MEAN WELL


DC-DC Step-Up Constant Current LED driver

LDH-65 series

■ Mechanical Specification

- All dimensions in mm(inch)
- Pin size is:1±0.05mm (0.04"±0.005")


LDH (PIN Style):

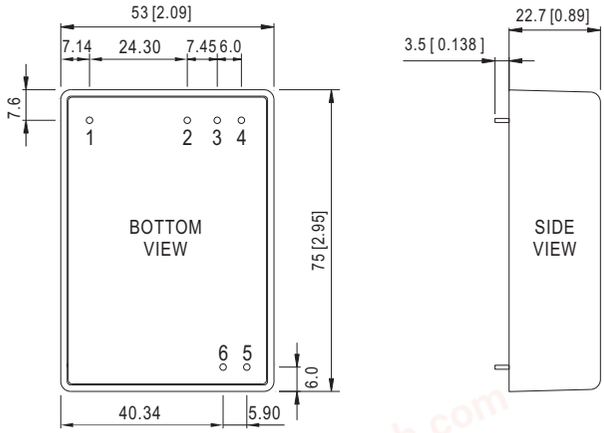

■ Pin Configuration


Pin No.		Comment
1	Vin+	DC Supply
2	Vin-	DC Supply, Don't connect to Vout-
3	Dim-	2 in 1 dimming
4	Dim+	2 in 1 dimming
5	Vout-	LED- connection
6	Vout+	LED+ connection

LDH (Lead Wire Style):

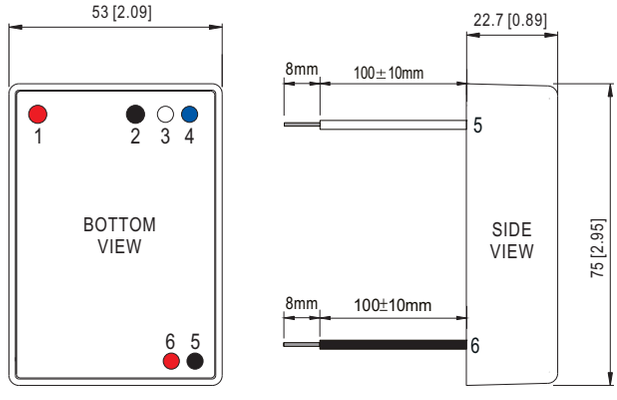


Pin No.		Comment
1	Vin+(Red)	DC Supply
2	Vin-(Black)	DC Supply Don't connect to Vout-
3	Dim-(White)	2 in 1 dimming
4	Dim+(Blue)	2 in 1 dimming
5	Vout-(Black)	LED- connection
6	Vout+(Red)	LED+ connection

■ Derating Curve

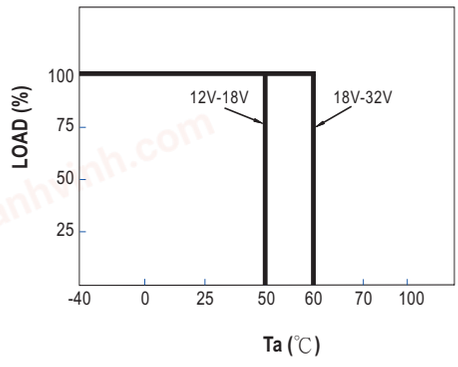

■ Static Characteristics

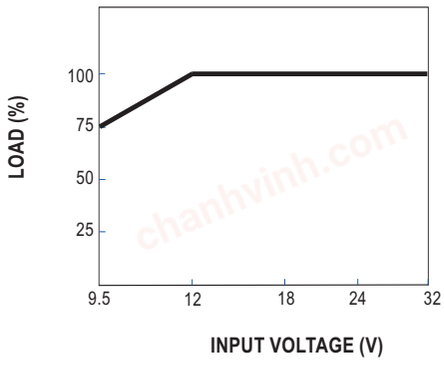


chanhvinh.com

■ Standard Application


※ **2 in 1 dimming function**

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10VDC, or 10V PWM signal
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.


◎ Applying additive 0 ~ 10VDC

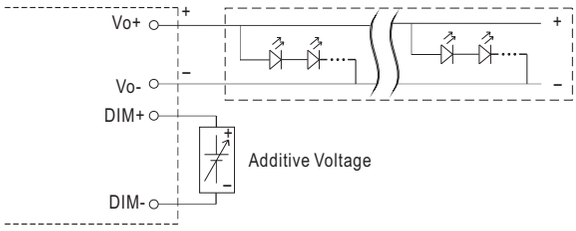


"DO NOT connect "DIM- to Vo-"

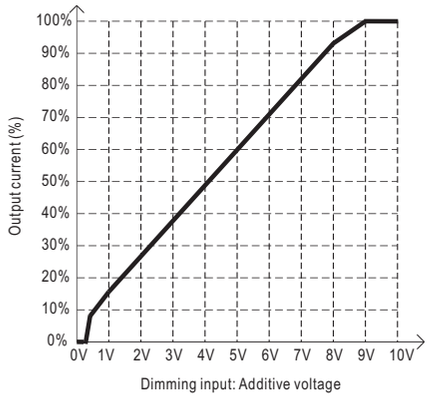

◎ Applying additive 10V PWM signal (frequency range 1KHz ~ 3KHz):

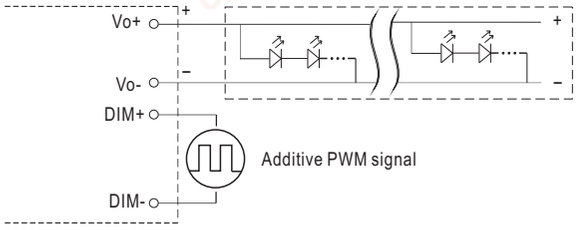

"DO NOT connect "DIM- to Vo-"

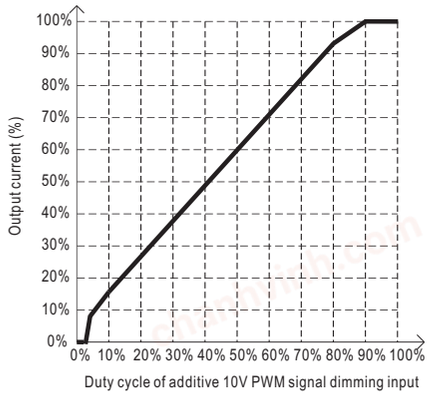


Note: 1.Min.dimming level is about 8% and the output current is not defined when 0% < Iout < 8%.
2.The output voltage is about equal to input voltage when dimming input is about 0Vdc,or 10V PWM signal with 0% duty cycle.


chanhvinh.com

■ Efficiency VS Load


LDH-65-700 12VDC input Vf=3.15V

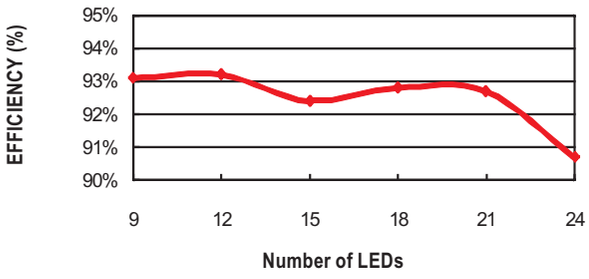


LDH-65-700 24VDC input Vf=3.15V

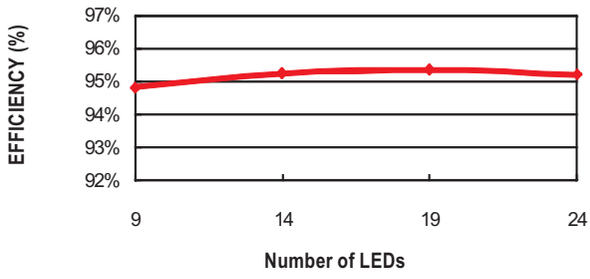


LDH-65-1050 12VDC input Vf=3.15V

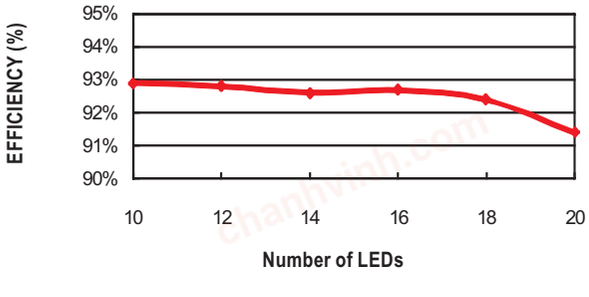


LDH-65-1050 24VDC input Vf=3.15V

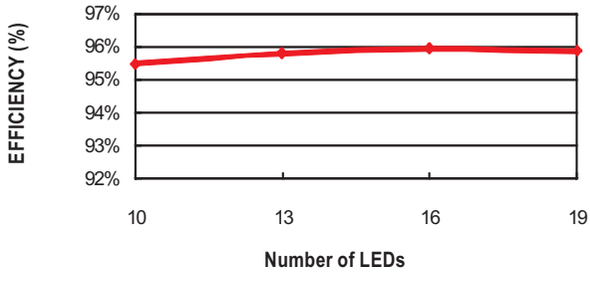


LDH-65-1400 12VDC input Vf=3.15V

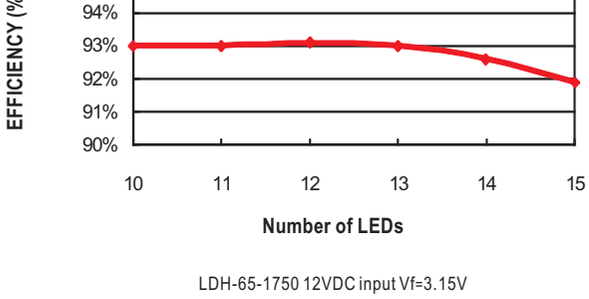


LDH-65-1400 24VDC input Vf=3.15V

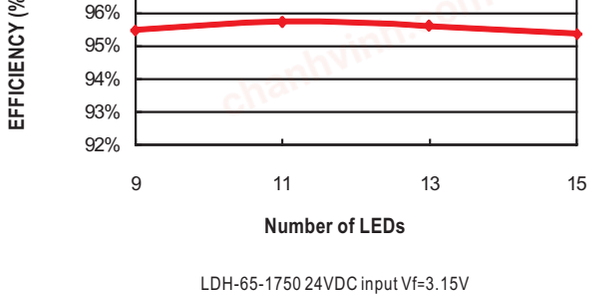

LDH-65-1750 12VDC input Vf=3.15V

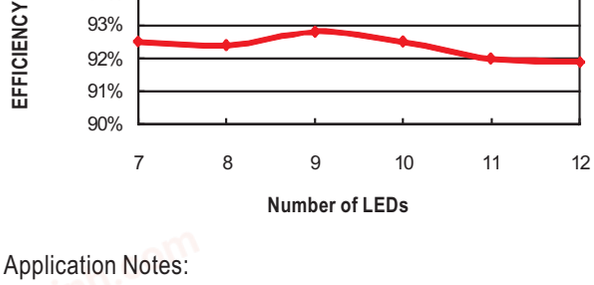

LDH-65-1750 24VDC input Vf=3.15V

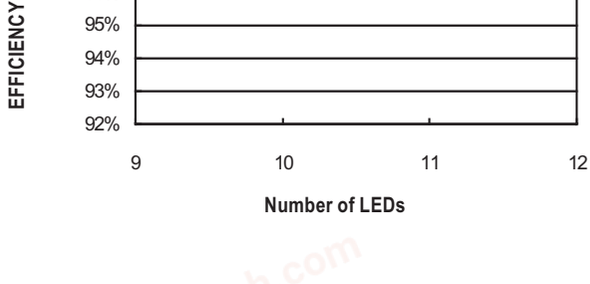

Application Notes:

1.The positive and negative input terminals must be connected correctly and negative voltage can not be input to avoid damage to the power supply.

2.Due to the large input current, please pay attention to the voltage drop of the wiring, to ensure the power supply to work properly.

3.At dim off,LDH output voltage will drop to the same level as input voltage.To get luminaires complete dark, please make luminaires are light off when they are driving by the input voltage.

chanhvinh.com

■ Application Notes of EMC

1. If LDH-65 is powered by a battery, comply with EN55015 without additional Input filter and capacitors.
2. If LDH-65 is powered by DC Bus, additional EMC filter parts shall be added to meet EN55015. The recommended circuit is shown in Figure1

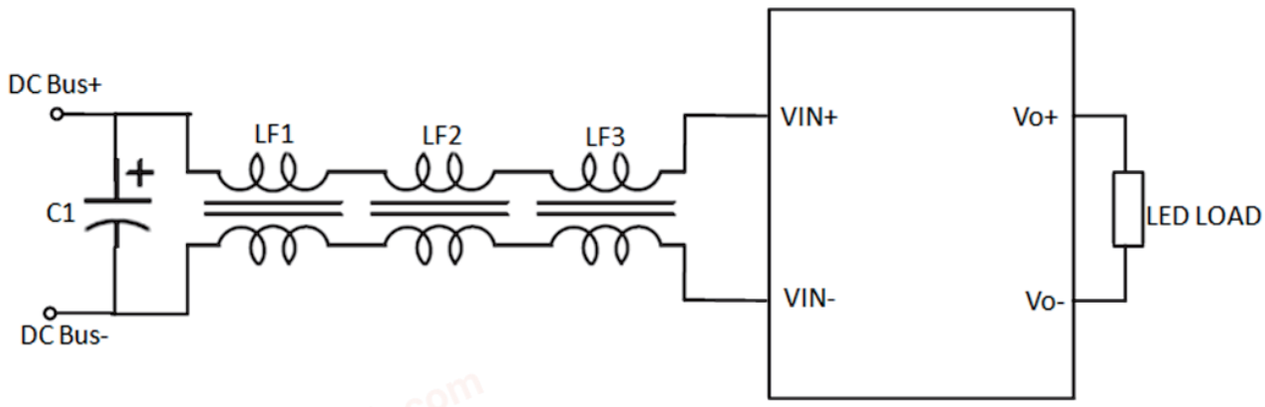


Figure 1

Figure 1:Parameter description	
C1	Electrolytic capacitor 100uF/50V
LF1/LF2	Common Mode Choke(parallel): 10.7mH/Ring code(T31×19×12)/wire(1mm×1)/36 Turns (Mn-Zn Ferrite/μi=7000±25%/AL=8220±30%nH/N^2)
LF3	Common Mode Choke(Separate): 370μH/Ring code(T25×15×12)/wire(1mm×1)/17 Turns (Ni-Zn Ferrite/μi=800±25%)