chanhvinh.com

METZ CONNECT
We realize ideas

P | Cabling

Data sheet

Connection cable M12 jack straight - free line end 8-pole, X-coded 0.5 m


P/N 142M2X20005
EAN 4250184199441

2018-13-02


Illustrations



Dimensional drawing

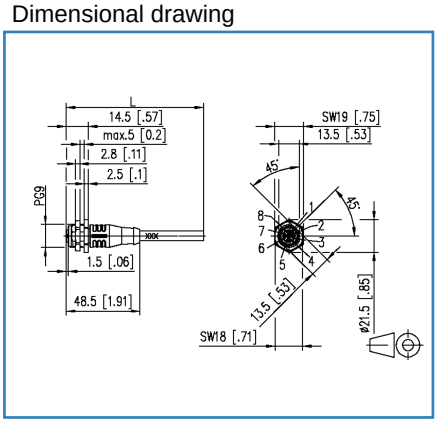

Cut-out

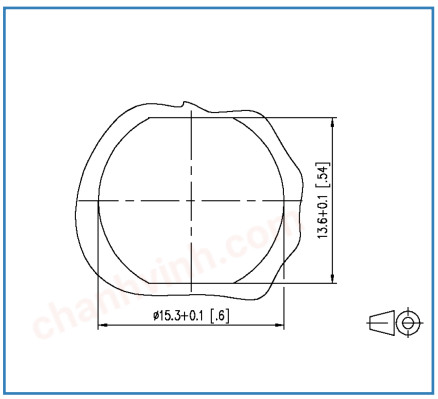

See enlarged drawings at the end of document

Product specification

- shielded M12 Ethernet connection cable
- Cat.6_A, x-coded, 8-pole
- side 1: M12-jack, straight
- side 2: free line end
- M12-jack over molded
- stranded wires 4x2xAWG26/7
- overall shield tinned copper braid
- green cable, PUR
- protective cap included in the delivery

- standard variants: 1.0 m, 2.0 m, 5.0 m, 10.0 m
- other cable lengths on request

© 2018 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

chanhvinh.com

P | Cabling

Data sheet

Connection cable M12 jack straight - free line end 8-pole, X-coded 0.5 m

P/N 142M2X20005

EAN 4250184199441

2018-13-02

Technical Data

General Data	
Fields of application	
	Industrial Ethernet
Design	Ethernet-Connection cable
Shielding	shielded
Transmission technology	Copper
Cable Type	S/FTP
Number of twisting elements	4
Twisting element	Pair
Color coding fiber/ wire(s)	white/orange, orange, white/green, green, white/brown, brown, white/blue, blue
Color	green
Dimensions	
Dimension - Interface 1 (L x W x H)	48.50 x 18.00 x 21.50 mm
Dimension - Interface 1 (L x W x H)	1.909 x 0.709 x 0.846 in.
Cable length (m)	0.50 m
Labeling option	identification label carrier
Transmission characteristics	
Category (ISO)	7
Connections/interfaces	
Connector technology interface 1	M12-jack
Coding interface 1	X-coded
Number of positions/contacts interface 1	8
Termination data, stranded wire (min. - max.)	
Conductor cross section, stranded wire	AWG 26/7
Conductor cross section, stranded wire	0.141 mm²
Conductor diameter, stranded wire (bare copper)	0.483 mm
Conductor diameter, stranded wire (bare copper)	0.019 in.
Cable sheath diameter (min. - max.)	
Cable sheath diameter	6.40 mm
Cable sheath diameter	0.236 in.

© 2018 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

chanhvinh.com

METZ CONNECT
We realize ideas

P | Cabling

Data sheet

Connection cable M12 jack straight - free line end 8-pole, X-coded 0.5 m

P/N 142M2X20005
EAN 4250184199441

2018-13-02

Technical Data

Electrical characteristics	
Current carrying capacity	0.5 A
Insulation resistance	min. 100 MOhm
Mechanical characteristics	
Maximum operating bending radius	64 mm
Maximum operating bending radius	2.52 in.
Maximum installation load	32 mm
Maximum installation load	1.26 in.
Shielding braid coverage	70 %
Materials and material properties	
Material - Conductor	Cu (copper)
Material - Conductor Insulation	Polyethylen
Material - Cable jacket	PUR
Material - Body interface 1	Plastics
Material - Contact interface 1	CuZn (brass)
Material - Contact finish interface 1	Au (gold)
Material - Contact carriers interface 1	Plastics
Material - Union nut interface 1	CuZn (brass)
Material - Union nut finish interface 1	Ni (nickel)
Material - Pair shield	plastic film
Material - Pair shield finish	Al (Aluminium)
Material - Main shield	Cu (copper) braid
Material - Main shield finish	Sn (tin)
Flame retardancy	yes
Halogen free	yes
Oil resistance	yes
UV-resistance	yes
Environmental conditions	
Temperature (min. - max.)	
Temperature - Operating °C	-30 - 90 °C
Temperature - Operating °F	-22 - 194 °F
Particulate ingress interface 1	IP6X when plugged in
Liquid ingress/immersion interface 1	IPX7 when plugged in

© 2018 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

chanhvinh.com

METZ CONNECT
We realize ideas

P | Cabling

Data sheet

Connection cable M12 jack straight - free line end 8-pole, X-coded 0.5 m

P/N 142M2X20005
EAN 4250184199441

2018-13-02

Technical Data

Environmental conditions	
Pollution degree interface 1	3
Approvals	
RoHS	compliant
The product meets the following standards	
Connectors for electronic equipment	
Free and fixed connectors	IEC 60603-7-51
circular connector	DIN EN 61076-2-109
Multi-element metallic cables used in analogue and digital communication and control	DIN EN 50288-4-2
Test for vertical flame propagation for a single insulated wire or cable	DIN EN 60332-1-2
Measurement of smoke density of cables burning	IEC 61034
Classifications	
ETIM 5.0	EC002599
ETIM 6.0	EC002599
Packing details	
Type of packaging	1 pc(s) / plastic bag

© 2018 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

chanhvinh.com

METZ CONNECT
We realize ideas

P | Cabling

Data sheet


Connection cable M12 jack straight - free line end 8-pole, X-coded 0.5 m

P/N 142M2X20005
EAN 4250184199441


2018-13-02

Illustrations

Dimensional drawing

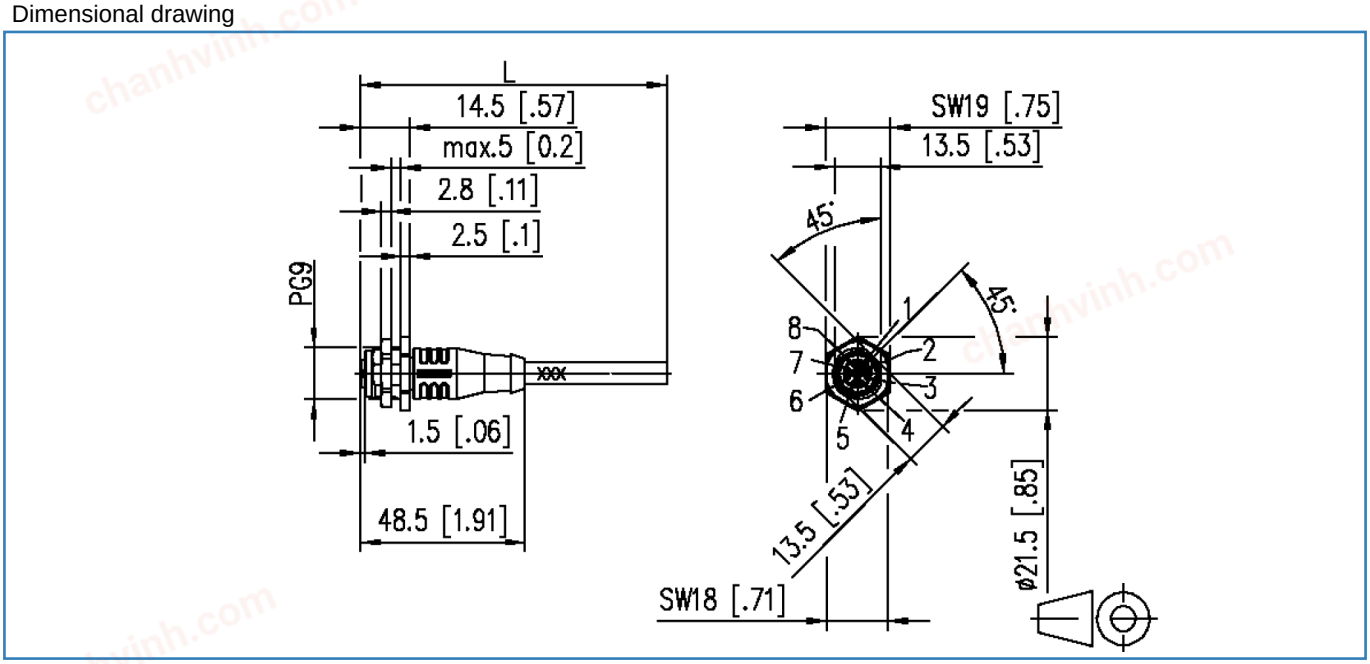

Cut-out

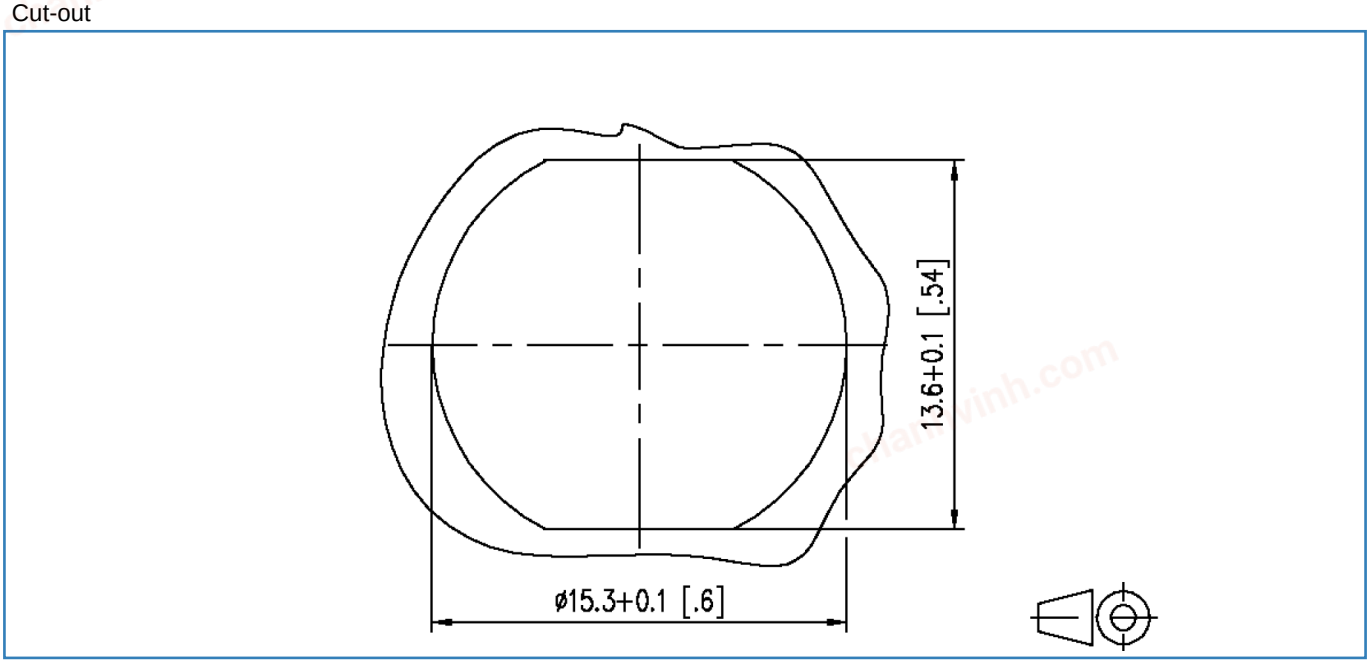

© 2018 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

METZ CONNECT GmbH | Im Tal 2 | 78176 Blumberg | Germany
Phone +49 7702 533-0 | Fax +49 7702 533-433
Weitere Dokumentation siehe / additional documentation see / documentation supplémentaire voir www.metz-connect.com

RIA CONNECT BTR NETCOM

chanhvinh.com

METZ CONNECT
We realize ideas

P | Cabling

Data sheet


Connection cable M12 jack straight - free line end 8-pole, X-coded 0.5 m

P/N 142M2X20005
EAN 4250184199441

2018-13-02

Illustrations

Wiring

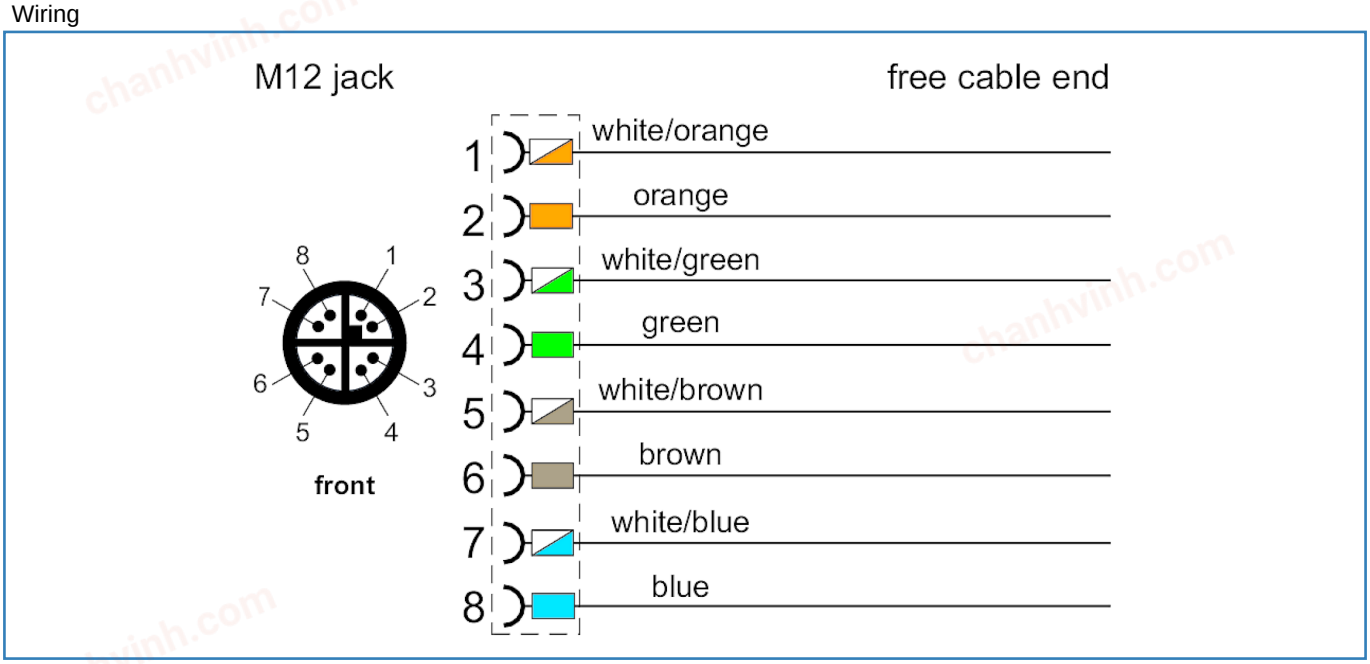

© 2018 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!