Other Information

To obtain the most recent and complete documentation for this demonstration board, including:

- User's Guide
- Board Description
- Board Schematics
- Source Code
- Application Examples
- Links to Web Seminars

please refer to the Microchip web site: www.microchip.com

AMERICAS
Atlanta - 678-957-9614
Boston - 774-760-0087
Chicago - 630-285-0071
Cleveland - 216-447-0464
Dallas - 972-818-7423
Detroit - 248-538-2250
Indianapolis - 317-773-8323
Los Angeles - 949-462-9523
Phoenix - 480-792-7200
Santa Clara - 408-961-6444
Toronto - 905-673-0699

ASIA/PACIFIC
Australia - Sydney - 61-2-9868-6733
China - Beijing - 86-10-8569-7000
China - Chengdu - 86-28-8665-5511
China - Chongqing - 86-23-8980-9588
China - Hangzhou - 86-571-2819-3187
China - Hong Kong SAR - 852-2401-1200
China - Nanjing- 86-25-8473-2460
China - Qingdao - 86-532-8502-7355
China - Shanghai - 86-21-5407-5533
China - Shenyang - 86-24-2334-2829
China - Shenzhen - 86-755-8203-2660
China - Wuhan - 86-27-5980-5300
China - Xiamen - 86-592-2388138
China - Xian - 86-29-8833-7252
China - Zhuhai - 86-756-3210040
India - Bangalore - 91-80-3090-4444
India - New Delhi - 91-11-4160-8631
India - Pune - 91-20-2566-1512
Japan - Yokohama - 81-45-471-6166
Korea - Daegu - 82-53-744-4301
Korea - Seoul - 82-2-554-7200
Malaysia - Kuala Lumpur - 60-3-6201-9857
Malaysia - Penang - 60-4-227-8870
Philippines - Manila - 63-2-634-9065
Singapore - 65-6334-8870
Taiwan - Hsin Chu - 886-3-5778-366
Taiwan - Kaohsiung - 886-7-536-4818
Taiwan - Taipei - 886-2-2500-6610
Thailand - Bangkok - 66-2-694-1351

EUROPE
Austria - Wels - 43-7242-2244-39
Denmark - Copenhagen - 45-4450-2828
France - Paris - 33-1-69-53-63-20
Germany - Munich - 49-89-627-144-0
Italy - Milan - 39-0331-742611
Netherlands - Drunen - 31-416-690399
Spain - Madrid - 34-91-708-08-90
UK - Wokingham - 44-118-921-5869

08/02/11

Microchip Technology Inc. • 2355 West Chandler Blvd. • Chandler, AZ 85224-6199

www.microchip.com

The Microchip name and logo and the Microchip logo are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. PICkit and PICtail is a trademark of Microchip Technology Incorporated in the U.S.A. and other countries. All other trademarks mentioned herein are property of their respective companies.
© 2011, Microchip Technology Incorporated, Printed in the U.S.A. All Rights Reserved. 10/11

DS41613A

PIC10(L)F32X Development Board Quick Start Guide

Overview

The PIC10(L)F32X Development Board is programmed at the factory with a demonstration program. The board does not need to be configured in any way in order to use the demonstration program. Once the board is powered up, the brightness of LED (D2) may be varied using the potentiometer (POT1). LED (D1) is powered as long as the PIC10F322 device is operating, and will thus vary with the supply voltage.

Board Setup

There is no setup for this demo board to operate.

Board Power-Up

Supply power to the board in one of the following ways:

- Connect a 2.3-5 VDC supply using J4 (see Figure 1).
- Use the power supplied by the PICkit™ 3 or MPLAB™ ICD 3 programmers.

Demonstration Program

After applying power to the PIC10(L)F32X Development Board, LED (D1) will automatically turn on. Turn POT1 clockwise to increase the brightness of LED (D2). Press switch (SW1) to turn both LEDs D1 and D2 off, release switch (SW1) and LEDs D1 and D2 will turn on.

Board Layout

The PIC10(L)F32X Development Board is shown in Figure 1 and a schematic in Figure 2.

A PIC10F322 microcontroller is populated on the top center of the demo board under the identification label U1. The PIC10F322 has 4 available I/O pins that are initially connected to the four major components on the board. The initial connections connect to the following components:


- Switch 1 (SW 1) – 1 pin: $\overline{\text{MCLR}}$ (pin 6) of microcontroller
- Pot 1 (POT1) – 1 pin: RA2 (pin 4) of microcontroller
- LED (D1) – 1 pin: RA1 (pin 3) of microcontroller
- LED (D2) – 1 pin: RA0 (pin 1) of microcontroller

Should you choose to use the board to experiment on your own, the board allows the flexibility to do so. A prototyping area is provided, with ground (GND) and supply voltage (VDD) connections on the left and right sides, to expand and experiment with the capabilities of the PIC10(L)F32X Development Board.

chanhvinh.com

chanhvinh.com

Figure 2: PIC10(L)F32X Development Board Schematic

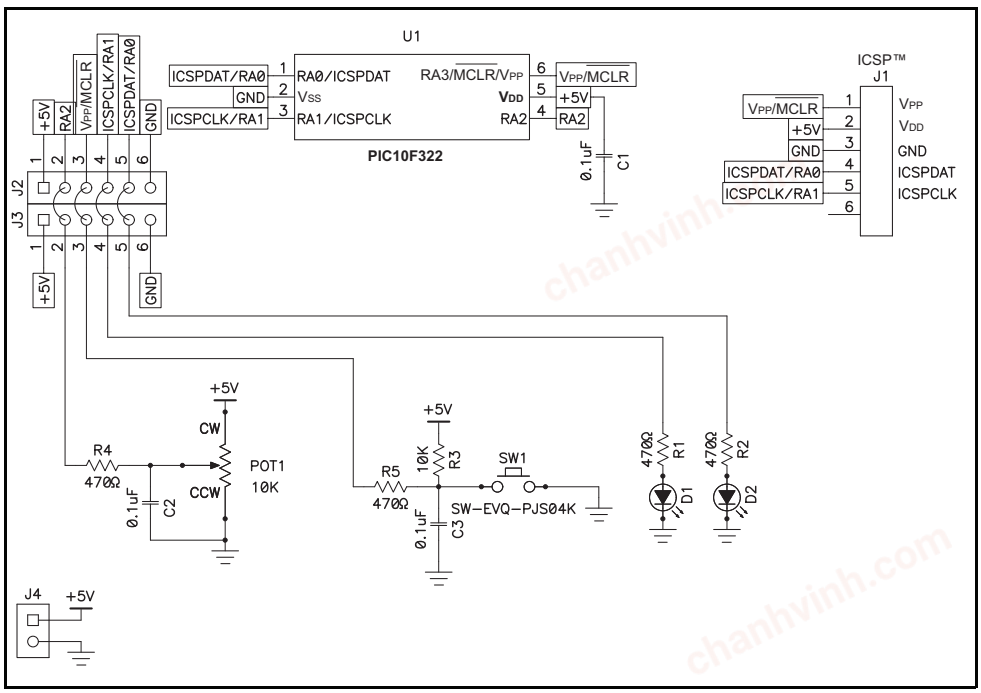

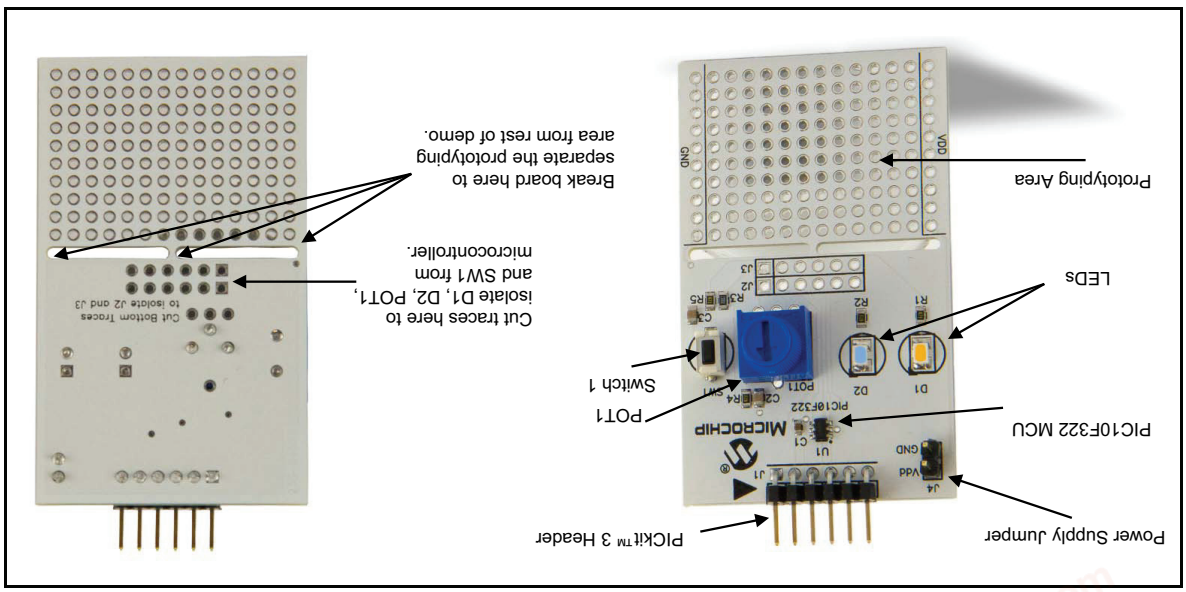


Figure 1: PIC10(L)F32X Development Board