chanhvinh.com

MCP111/112

Micropower Voltage Detector

Features

- **MCP111**: Passes AEC-Q100 Reliability Testing
- Ultra-Low Supply Current: 1.75 µA (Max.)
- Precision Monitoring Options Of:
  - 1.90V, 2.32V, 2.63V, 2.90V, 2.93V, 3.08V, 4.38V and 4.63V
- Resets Microcontroller in a Power-Loss Event
- Active-Low V_{OUT} Pin:
  - **MCP111** Active-Low, Open-Drain
  - **MCP112** Active-Low, Push-Pull
- Available in SOT23-3, TO-92, SC-70 and SOT-89-3 Packages
- Temperature Range:
  - Extended: –40°C to +125°C (**except MCP1XX-195**)
  - Industrial: –40°C to +85°C (**MCP1XX-195 Only**)
- Pb-Free Devices


Applications

- Critical Microcontroller and Microprocessor Power-Monitoring Applications
- Computers
- Intelligent Instruments
- Portable Battery-Powered Equipment


General Description

The MCP111/112 are voltage-detecting devices designed to keep a microcontroller in reset until the system voltage has stabilized at the appropriate level for reliable system operation. These devices also operate as protection from brown-out conditions when the system supply voltage drops below the specified threshold voltage level. Eight different trip voltages are available.

Package Types

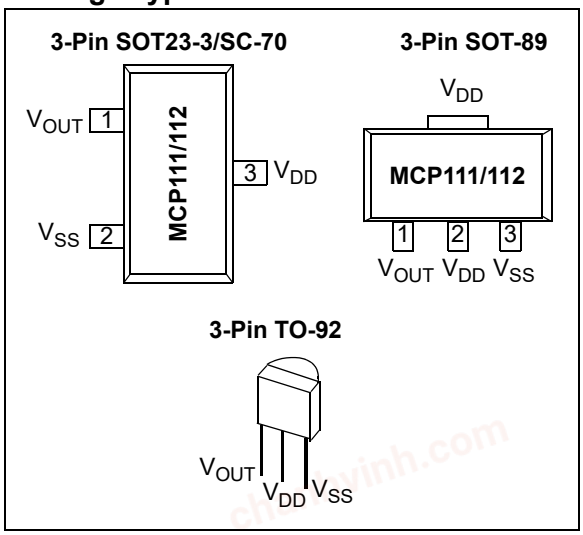

Block Diagram

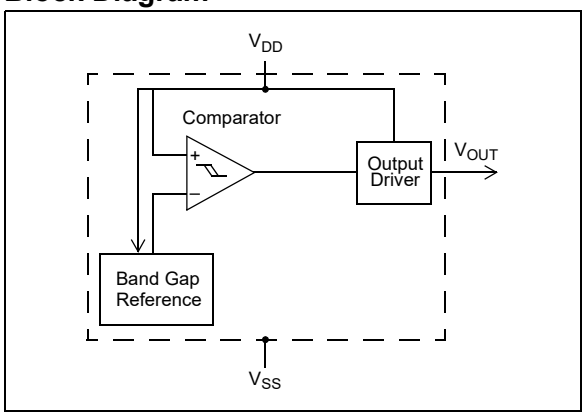

DEVICE FEATURES

Device	Output		Reset Delay (typ.)	SOT-23/SC70 Package Pin Out (Pin # 1, 2, 3)	Comment
	Type	Pull-up Resistor			
MCP111	Open-drain	External	No	V_{OUT}, V_{SS}, V_{DD}	
MCP112	Push-pull	No	No	V_{OUT}, V_{SS}, V_{DD}	
MCP102	Push-pull	No	120 ms	$\overline{RST}$, V_{DD}, V_{SS}	See **MCP102/103/121/131** Data Sheet (DS20001906)
MCP103	Push-pull	No	120 ms	V_{SS}, $\overline{RST}$, V_{DD}	See **MCP102/103/121/131** Data Sheet (DS20001906)
MCP121	Open-drain	External	120 ms	$\overline{RST}$, V_{DD}, V_{SS}	See **MCP102/103/121/131** Data Sheet (DS20001906)
MCP131	Open-Drain	Internal (~95 kΩ)	120 ms	$\overline{RST}$, V_{DD}, V_{SS}	See **MCP102/103/121/131** Data Sheet (DS20001906)

© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

1.0 ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings†

V_{DD} 7.0V
Input current (V_{DD}) ..... 10 mA
Output current ($\overline{RST}$) ..... 10 mA
Rated Rise Time of V_{DD} 100V/µs
All inputs and outputs (except $\overline{RST}$) w.r.t. V_{SS} ..... –0.6V to (V_{DD} + 1.0V)
$\overline{RST}$ output w.r.t. V_{SS} ..... –0.6V to 13.5V
Storage temperature ..... 65°C to + 150°C
Ambient temp. with power applied ..... –40°C to + 125°C
Maximum Junction temp. with power applied ..... 150°C
ESD protection on all pins
HBM ..... 2 kV
MM 200V (MCP111); 400V (MCP112)
CDM ..... 1.5 kV (MCP111 only)

† **Notice:** Stresses above those listed under “Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

DC CHARACTERISTICS

Electrical Specifications: Unless otherwise indicated, all limits are specified for V_{DD} = 1V to 5.5V, R_{PU} = 100 kΩ (only **MCP111**), T_A = –40°C to +125°C.

Parameters		Symbol	Min.	Typ.	Max.	Units	Conditions
Operating Voltage Range		V_{DD}	1.0	—	5.5	V	
Specified V_{DD} Value to V_{OUT} low		V_{DD}	1.0	—		V	$I_{\overline{RST}}$ = 10 µA, $V_{\overline{RST}}$ < 0.2V
Operating Current		I_{DD}	—	< 1	1.75	µA	
V_{DD} Trip Point	**MCP1XX-195**	V_{TRIP}	1.872	1.900	1.929	V	T_A = +25°C **(Note 1)**
			1.853	1.900	1.948	V	T_A = –40°C to +85°C **(Note 2)**
	MCP1XX-240		2.285	2.320	2.355	V	T_A = +25°C **(Note 1)**
			2.262	2.320	2.378	V	**Note 2**
	MCP1XX-270		2.591	2.630	2.670	V	T_A = +25°C **(Note 1)**
			2.564	2.630	2.696	V	**Note 2**
	MCP1XX-290		2.857	2.900	2.944	V	T_A = +25°C **(Note 1)**
			2.828	2.900	2.973	V	**Note 2**
	MCP1XX-300		2.886	2.930	2.974	V	T_A = +25°C **(Note 1)**
			2.857	2.930	3.003	V	**Note 2**
	MCP1XX-315		3.034	3.080	3.126	V	T_A = +25°C **(Note 1)**
			3.003	3.080	3.157	V	**Note 2**
	MCP1XX-450		4.314	4.380	4.446	V	T_A = +25°C **(Note 1)**
			4.271	4.380	4.490	V	**Note 2**

Note 1: Trip point is ±1.5% from typical value.
2: Trip point is ±2.5% from typical value.
3: This specification allows this device to be used in PIC® microcontroller applications that require the In-Circuit Serial Programming™ (ICSP™) feature (see device-specific programming specifications for voltage requirements). This specification DOES NOT allow a continuous high voltage to be present on the open-drain output pin (V_{OUT}). The total time that the V_{OUT} pin can be above the maximum device operational voltage (5.5V) is 100 sec. Current into the V_{OUT} pin should be limited to 2 mA. It is recommended that the device operational temperature be maintained between 0°C to 70°C (+25°C preferred). For additional information, please refer to Figure 2-28.
4: This parameter is established by characterization and is not 100% tested.

© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

DC CHARACTERISTICS (CONTINUED)

Electrical Specifications: Unless otherwise indicated, all limits are specified for V_{DD} = 1V to 5.5V, R_{PU} = 100 kΩ (only **MCP111**), T_A = –40°C to +125°C.

Parameters		Symbol	Min.	Typ.	Max.	Units	Conditions
V_{DD} Trip Point	**MCP1XX-475**	V_{TRIP}	4.561	4.630	4.700	V	T_A = +25°C (**Note 1**)
			4.514	4.630	4.746	V	**Note 2**
V_{DD} Trip Point Tempco		T_{TPCO}	—	±100	—	ppm/°C	
Threshold Hysteresis (min. = 1%, max = 6%)	**MCP1XX-195**	V_{HYS}	0.019	—	0.114	V	T_A = +25°C
	MCP1XX-240		0.023	—	0.139	V	
	MCP1XX-270		0.026	—	0.158	V	
	MCP1XX-290		0.029	—	0.174	V	
	MCP1XX-300		0.029	—	0.176	V	
	MCP1XX-315		0.031	—	0.185	V	
	MCP1XX-450		0.044	—	0.263	V	
	MCP1XX-475		0.046	—	0.278	V	
V_{OUT} Low-level Output Voltage		V_{OL}	—	—	0.4	V	I_{OL} = 500 µA, V_{DD} = $V_{TRIP(MIN)}$
V_{OUT} High-level Output Voltage		V_{OH}	V_{DD} – 0.6	—	—	V	I_{OH} = 1 mA, For only **MCP112** (push-pull output)
Open-drain High Voltage on Output		V_{ODH}	—	—	13.5 (3)	V	**MCP111** only, V_{DD} = 3.0V, Time voltage > 5.5V applied ≤ 100s, current into pin limited to 2 mA, +25°C operation recommended **Note 3**, **Note 4**
Open-drain Output Leakage Current (**MCP111** only)		I_{OD}	—	0.1	—	µA	

Note 1: Trip point is ±1.5% from typical value.

2: Trip point is ±2.5% from typical value.

3: This specification allows this device to be used in PIC® microcontroller applications that require the In-Circuit Serial Programming™ (ICSP™) feature (see device-specific programming specifications for voltage requirements). This specification DOES NOT allow a continuous high voltage to be present on the open-drain output pin (V_{OUT}). The total time that the V_{OUT} pin can be above the maximum device operational voltage (5.5V) is 100 sec. Current into the V_{OUT} pin should be limited to 2 mA. It is recommended that the device operational temperature be maintained between 0°C to 70°C (+25°C preferred). For additional information, please refer to Figure 2-28.

4: This parameter is established by characterization and is not 100% tested.

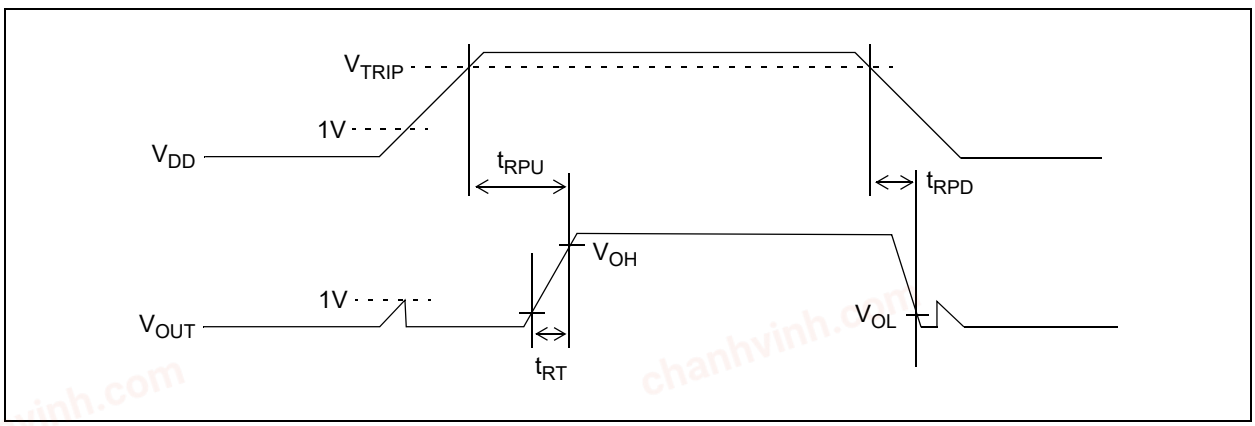


FIGURE 1-1: *Timing Diagram.*

chanhvinh.com

AC CHARACTERISTICS

Electrical Specifications: Unless otherwise indicated, all limits are specified for V_{DD} = 1V to 5.5V, R_{PU} = 100 kΩ (only **MCP111**), T_A = –40°C to +125°C.

Parameters	Symbol	Min.	Typ.	Max.	Units	Conditions
V_{DD} Detect to V_{OUT} Inactive	t_{RPU}	—	90	—	µs	Figure 1-1 and C_L = 50 pF (Note 1)
V_{DD} Detect to V_{OUT} Active	t_{RPD}	—	130	—	µs	V_{DD} ramped from $V_{TRIP(MAX)}$ + 250 mV down to $V_{TRIP(MIN)}$ – 250 mV, per Figure 1-1, C_L = 50 pF (Note 1)
V_{OUT} Rise Time After V_{OUT} Active	t_{RT}	—	5	—	µs	For V_{OUT} 10% to 90% of final value per Figure 1-1, C_L = 50 pF (Note 1)

Note 1: These parameters are for design guidance only and are not 100% tested.

TEMPERATURE CHARACTERISTICS

Electrical Specifications: Unless otherwise noted, all limits are specified for V_{DD} = 1V to 5.5V, R_{PU} = 100 kΩ (**MCP111** only), T_A = –40°C to +125°C.

Parameters	Symbol	Min.	Typ.	Max.	Units	Conditions
Temperature Ranges						
Specified Temperature Range	T_A	–40	—	+85	°C	**MCP1XX-195**
Specified Temperature Range	T_A	–40	—	+125	°C	Except **MCP1XX-195**
Maximum Junction Temperature	T_J	—	—	+150	°C	
Storage Temperature Range	T_A	–65	—	+150	°C	
Package Thermal Resistances						
Thermal Resistance, 3L-SOT23	θ_{JA}	—	336	—	°C/W	
Thermal Resistance, 3L-SC-70	θ_{JA}	—	340	—	°C/W	
Thermal Resistance, 3L-TO-92	θ_{JA}	—	131.9	—	°C/W	
Thermal Resistance, 3L-SOT-89	θ_{JA}	—	110	—	°C/W	

© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

2.0 TYPICAL PERFORMANCE CURVES

Note: The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

Note: Unless otherwise indicated, all limits are specified for V_{DD} = 1V to 5.5V, R_{PU} = 100 kΩ (only **MCP111**; see **Figure 4-1**), T_A = –40°C to +125°C.

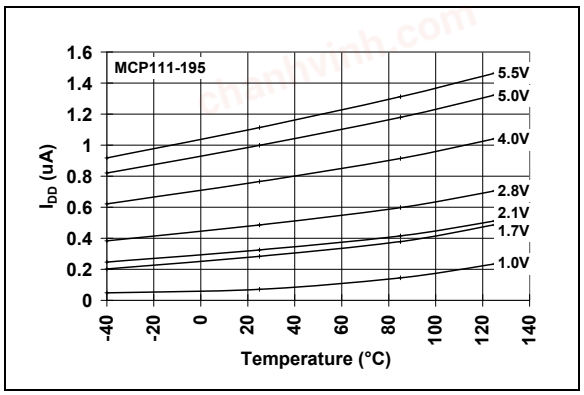


FIGURE 2-1: *I_{DD} vs. Temperature (**MCP111-195**).*

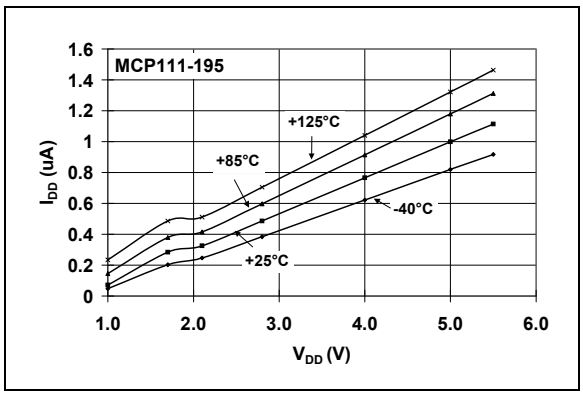


FIGURE 2-4: *I_{DD} vs. V_{DD} (**MCP111-195**).*

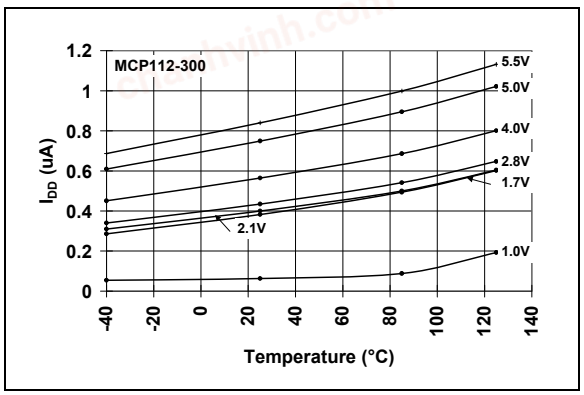


FIGURE 2-2: *I_{DD} vs. Temperature (**MCP112-300**).*

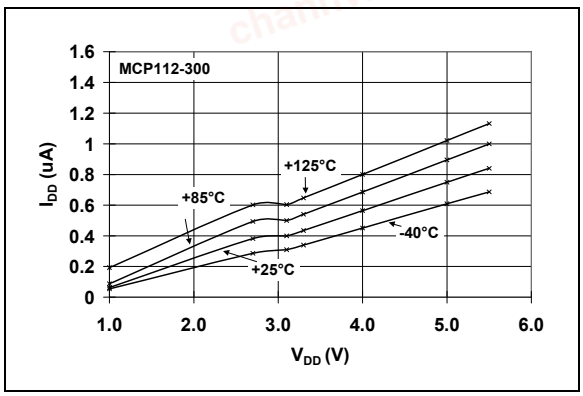


FIGURE 2-5: *I_{DD} vs. V_{DD} (**MCP112-300**).*

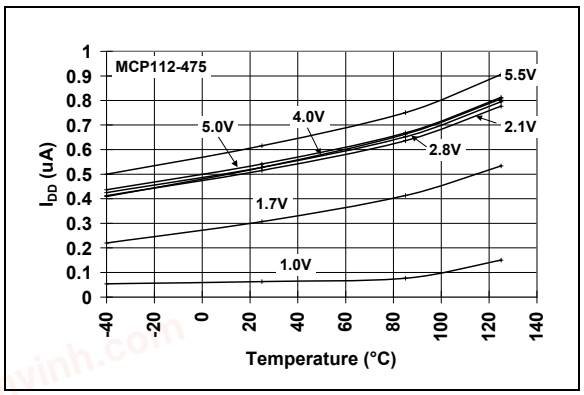


FIGURE 2-3: *I_{DD} vs. Temperature (**MCP112-475**).*

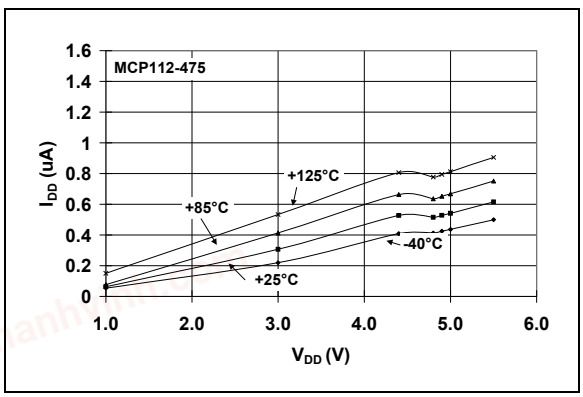


FIGURE 2-6: *I_{DD} vs. V_{DD} (**MCP112-475**).*

chanhvinh.com

Note: Unless otherwise indicated, all limits are specified for V_{DD} = 1V to 5.5V, R_{PU} = 100 kΩ (only **MCP111**; see **Figure 4-1**), T_A = –40°C to +125°C.

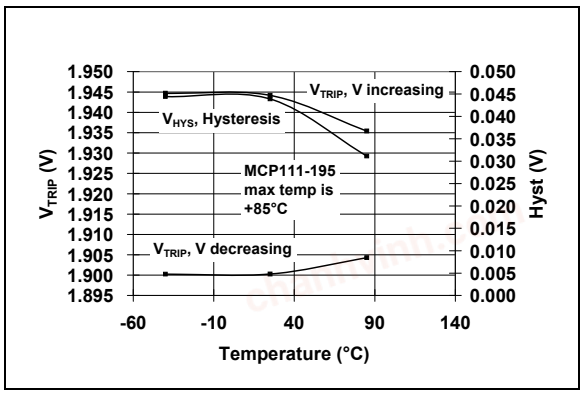


FIGURE 2-7: *V_{TRIP} and V_{HYST} vs. Temperature (**MCP111-195**).*

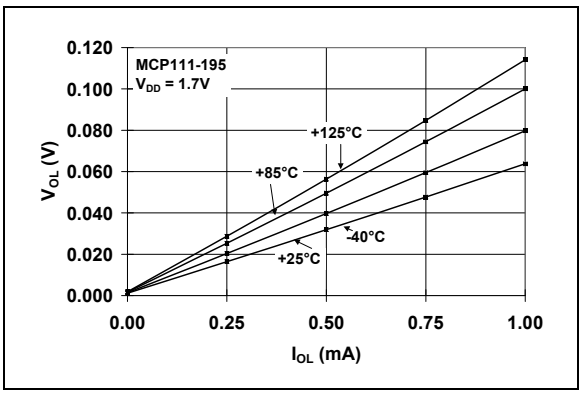


FIGURE 2-10: *V_{OL} vs. I_{OL} (**MCP111-195** @ V_{DD} = 1.7V).*

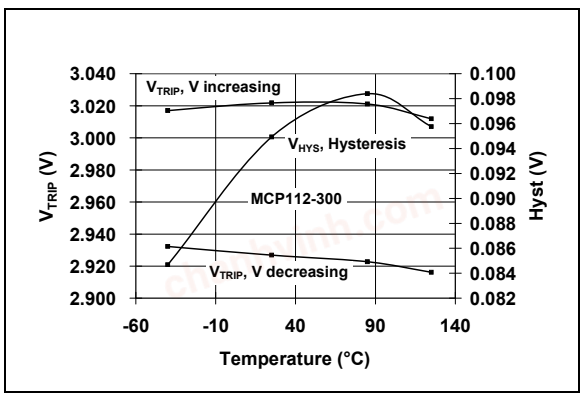


FIGURE 2-8: *V_{TRIP} and V_{HYST} vs. Temperature (**MCP112-300**).*

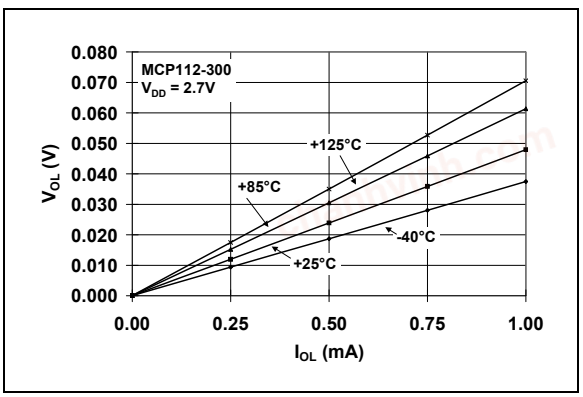


FIGURE 2-11: *V_{OL} vs. I_{OL} (**MCP112-300** @ V_{DD} = 2.7V).*

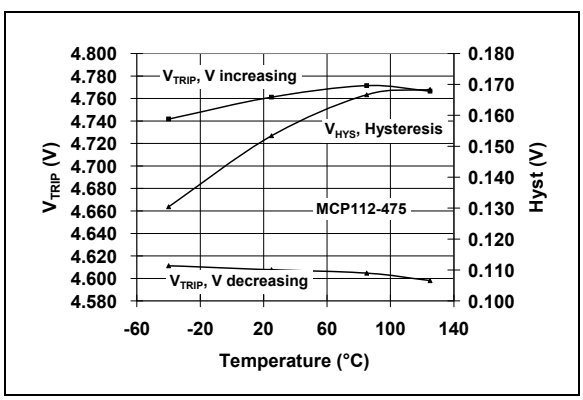


FIGURE 2-9: *V_{TRIP} and V_{HYST} vs. Temperature (**MCP112-475**).*

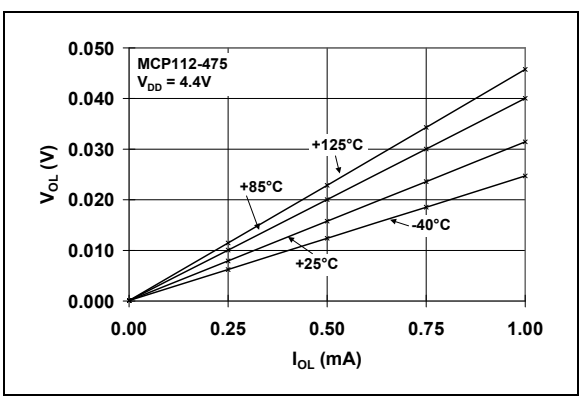


FIGURE 2-12: *V_{OL} vs. I_{OL} (**MCP112-475** @ V_{DD} = 4.4V).*

© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

Note: Unless otherwise indicated, all limits are specified for V_{DD} = 1V to 5.5V, R_{PU} = 100 kΩ (**only MCP111**; see **Figure 4-1**), T_A = –40°C to +125°C.

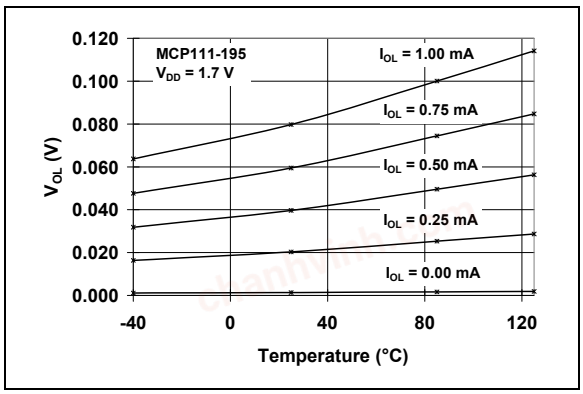


FIGURE 2-13: *V_{OL} vs. Temperature (**MCP111-195** @ V_{DD} = 1.7V).*

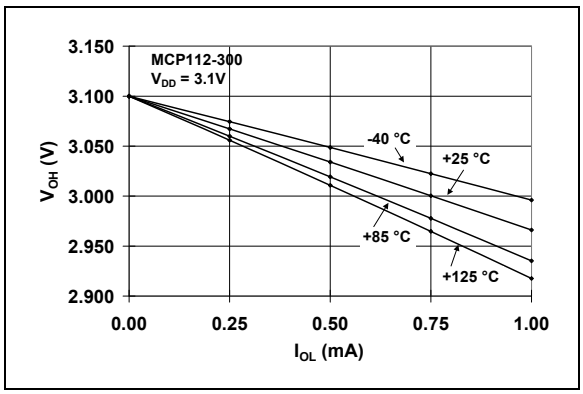


FIGURE 2-16: *V_{OH} vs. I_{OH} (**MCP112-300** @ V_{DD} = 3.1V).*

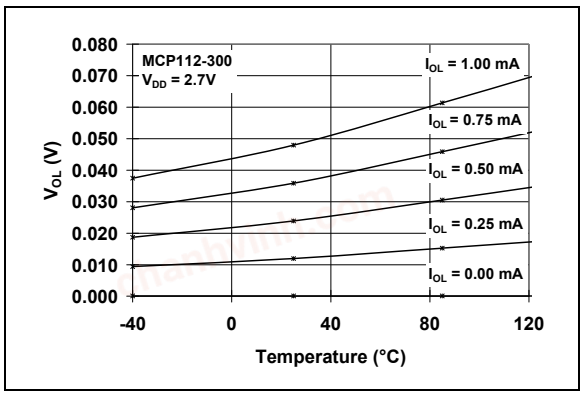


FIGURE 2-14: *V_{OL} vs. Temperature (**MCP112-300** @ V_{DD} = 2.7V).*

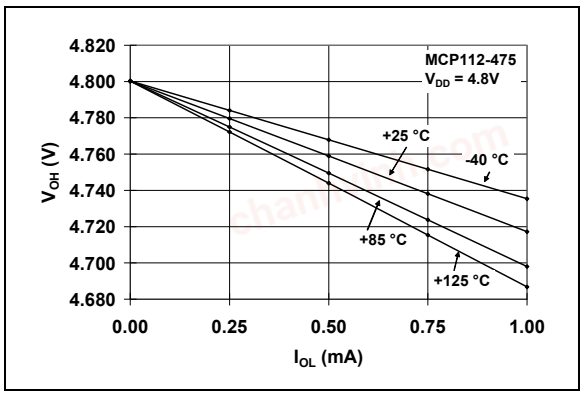


FIGURE 2-17: *V_{OH} vs. I_{OH} (**MCP112-475** @ V_{DD} = 4.8V).*

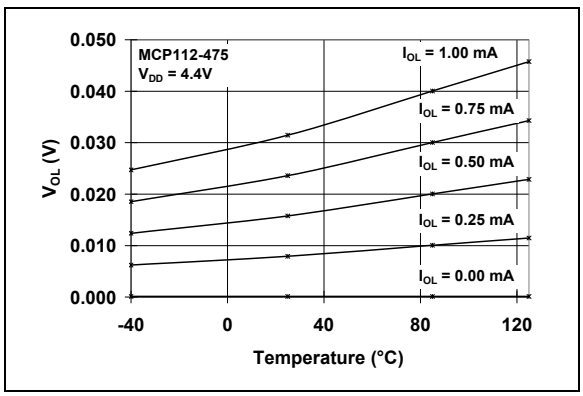


FIGURE 2-15: *V_{OL} vs. Temperature (**MCP112-475** @ V_{DD} = 4.4V).*

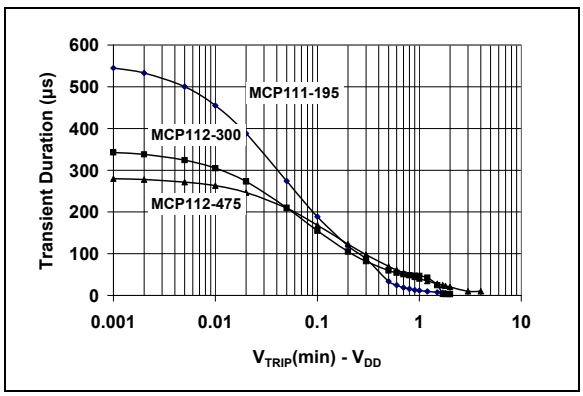


FIGURE 2-18: *Typical Transient Response (25 °C).*

chanhvinh.com

Note: Unless otherwise indicated, all limits are specified for V_{DD} = 1V to 5.5V, R_{PU} = 100 kΩ (**only MCP111**; see **Figure 4-1**), T_A = –40°C to +125°C.

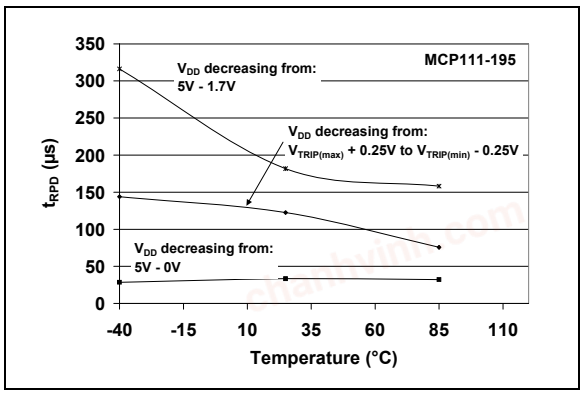


FIGURE 2-19: *t_{RPD} vs. Temperature (**MCP111-195**).*

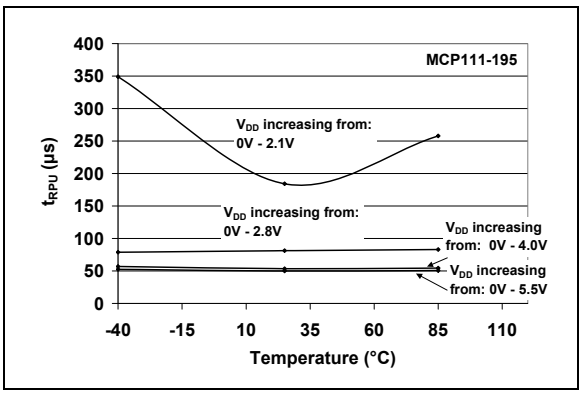


FIGURE 2-22: *t_{RPU} vs. Temperature (**MCP111-195**).*

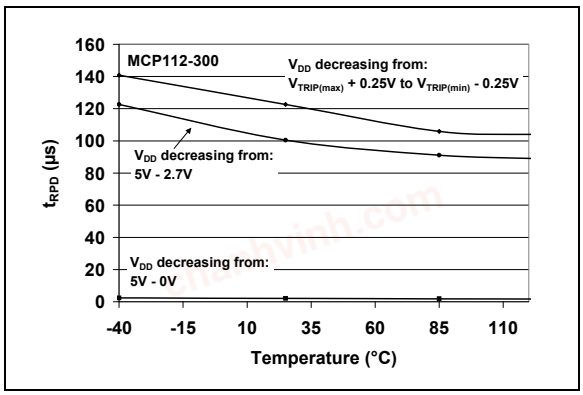


FIGURE 2-20: *t_{RPD} vs. Temperature (**MCP112-300**).*

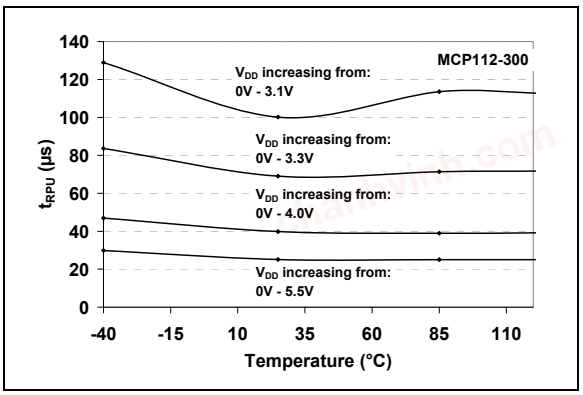


FIGURE 2-23: *t_{RPU} vs. Temperature (**MCP112-300**).*

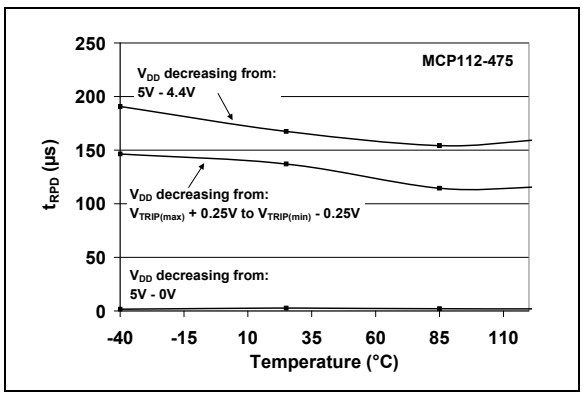


FIGURE 2-21: *t_{RPD} vs. Temperature (**MCP112-475**).*

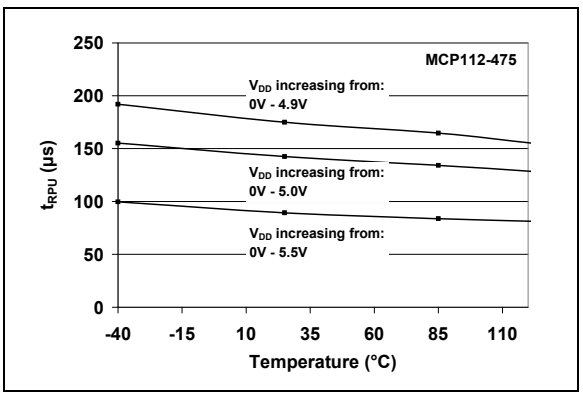


FIGURE 2-24: *t_{RPU} vs. Temperature (**MCP112-475**).*

© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

Note: Unless otherwise indicated, all limits are specified for V_{DD} = 1V to 5.5V, R_{PU} = 100 kΩ (**only MCP111**; see **Figure 4-1**), T_A = –40°C to +125°C.

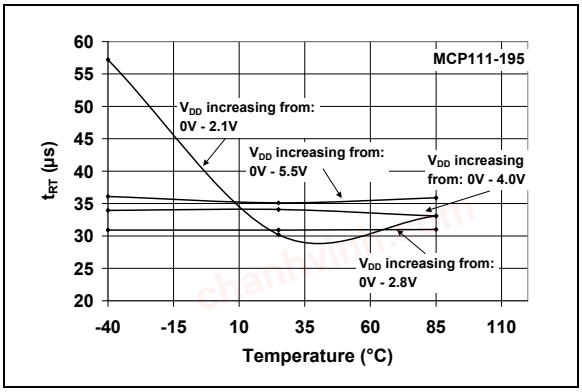


FIGURE 2-25: *t_{RT} vs. Temperature (**MCP111-195**).*

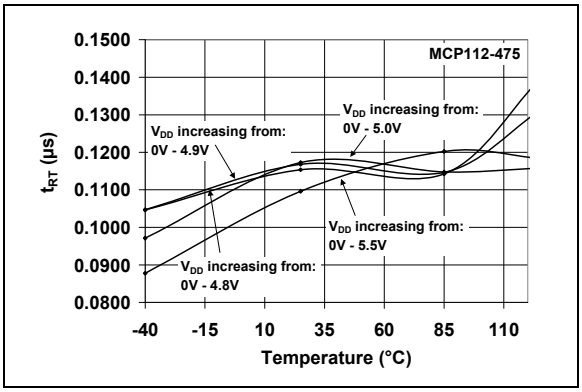


FIGURE 2-27: *t_{RT} vs. Temperature (**MCP112-475**).*

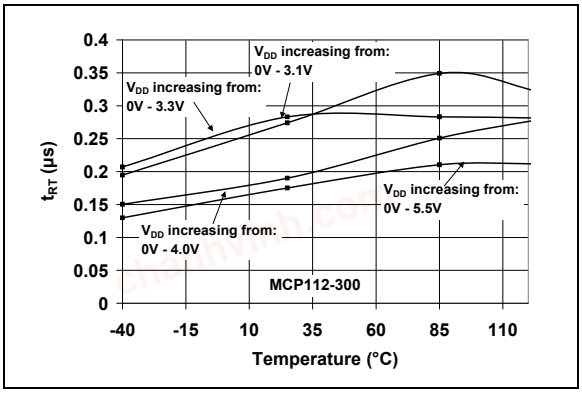


FIGURE 2-26: *t_{RT} vs. Temperature (**MCP112-300**).*

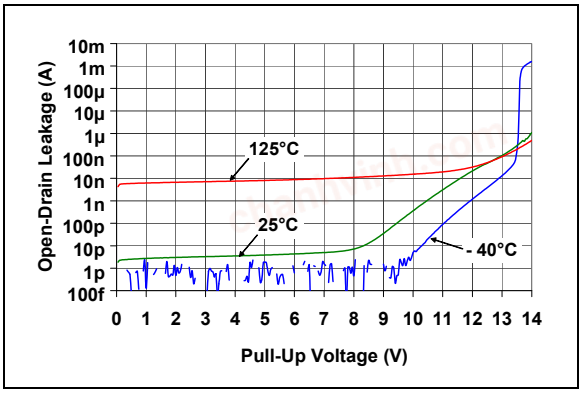


FIGURE 2-28: *Open-Drain Leakage Current vs. Voltage Applied to V_{OUT} Pin (**MCP111-195**).*

chanhvinh.com

chanhvinh.com

3.0 PIN DESCRIPTION

The descriptions of the pins are listed in Table 3-1.

TABLE 3-1: PIN FUNCTION TABLE


Pin Number			Symbol	Function
SOT-23-3 SC-70	SOT-89-3	T0-92		
1	1	1	V_{OUT}	**Output State** **V_{DD} Falling:** H = $V_{DD} > V_{TRIP}$ L = $V_{DD} < V_{TRIP}$ **V_{DD} Rising:** H = $V_{DD} > V_{TRIP} + V_{HYS}$ L = $V_{DD} < V_{TRIP} + V_{HYS}$
2	3	3	V_{SS}	Ground reference
3	2	2	V_{DD}	Positive power supply
—	4	—	V_{DD}	Positive power supply

© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

4.0 APPLICATION INFORMATION

For many of today's microcontroller applications, care must be taken to prevent low-power conditions that can cause many different system problems. The most common causes is a brown-out condition, where the system supply drops below the operating level momentarily. The second most common cause is when a slowly decaying power supply causes the microcontroller to begin executing instructions without sufficient voltage to sustain SRAM, thus producing indeterminate results. Figure 4-1 shows a typical application circuit.

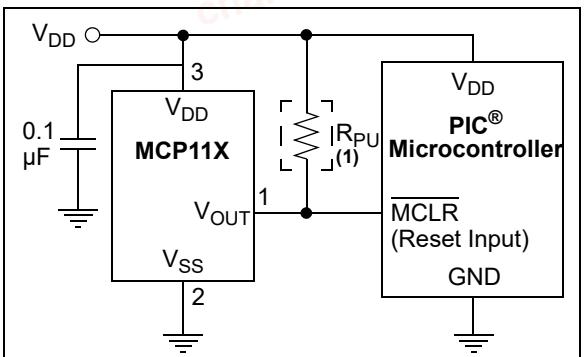

Note 1: R_{PU} may be required with the MCP111 due to the open-drain output. Resistor R_{PU} is not required with the MCP112.

FIGURE 4-1: *Typical Application Circuit.*

4.1 V_{TRIP} Operation

The voltage trip point (V_{TRIP}) is determined on the falling edge of V_{DD}. The actual voltage trip point (V_{TRIPAC}) will be between the minimum trip point ($V_{TRIPMIN}$) and the maximum trip point ($V_{TRIPMAX}$). There is a hysteresis on this trip point to remove any "jitter" that would occur on the V_{OUT} pin when the device V_{DD} is at the trip point.

Figure 4-2 shows the state of the V_{OUT} pin as determined by the V_{DD} voltage. The V_{TRIP} specification is for falling V_{DD} voltages. When the V_{DD} voltage is rising, the V_{OUT} pin will not be driven high until V_{DD} is at $V_{TRIP} + V_{HYS}$.

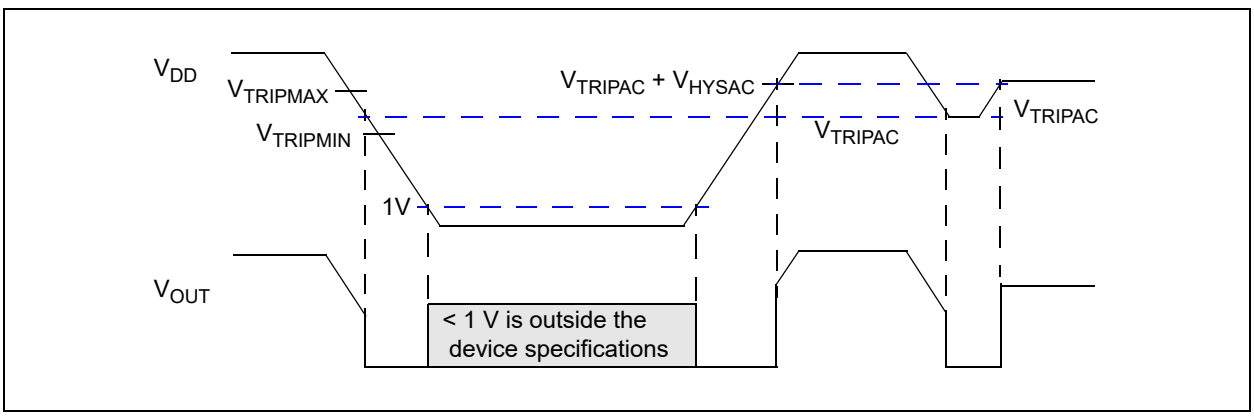


FIGURE 4-2: *V_{OUT} Operation as Determined by the V_{TRIP} and V_{HYS}.*

chanhvinh.com

4.2 Negative Going V_{DD} Transients

The minimum pulse width (time) required to cause a reset may be an important criteria in the implementation of a Power-on Reset (POR) circuit. This time is referred to as transient duration, defined as the amount of time needed for these supervisory devices to respond to a drop in V_{DD}. The transient duration time is dependent on the magnitude of $V_{TRIP} – V_{DD}$. Generally speaking, the transient duration decreases with increases in $V_{TRIP} – V_{DD}$.

Figure 4-3 shows a typical transient duration vs. reset comparator overdrive for which the MCP111/112 will not generate a reset pulse. It shows that the farther below the trip point the transient pulse goes, the duration of the pulse required to cause a reset gets shorter. Figure 2-18 shows the transient response characteristics for the MCP111/112.

A 0.1 µF bypass capacitor, mounted as close as possible to the V_{DD} pin, provides additional transient immunity (refer to Figure 4-1).

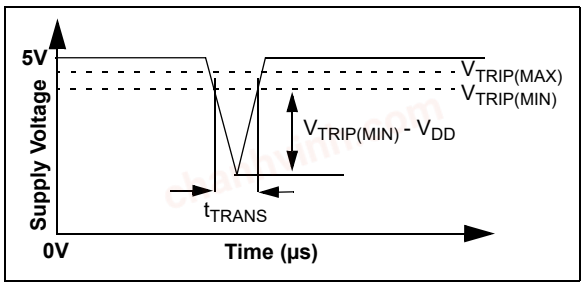


FIGURE 4-3: *Example of Typical Transient Duration Waveform.*

4.3 Effect of Temperature on Time-Out Period (t_{RPU})

The time-out period (t_{RPU}) determines how long the device remains in the reset condition. This is affected by both V_{DD} and temperature. The graph shown in Figures 2-22, 2-23 and 2-24 show the typical response for different V_{DD} values and temperatures.

4.4 Using in PIC® Microcontroller ICSP™ Applications (MCP111 only)

Figure 4-4 shows the typical application circuit for using the MCP111 for voltage supervisory function when the PIC microcontroller will be programmed via the In-Circuit Serial Programming™ (ICSP) feature. Additional information is available in TB087, *"Using Voltage Supervisors with PIC® Microcontroller Systems which Implement In-Circuit Serial Programming™"*, DS91087.

Note: It is recommended that the current into the $\overline{RST}$ pin be current limited by a 1 kΩ resistor.

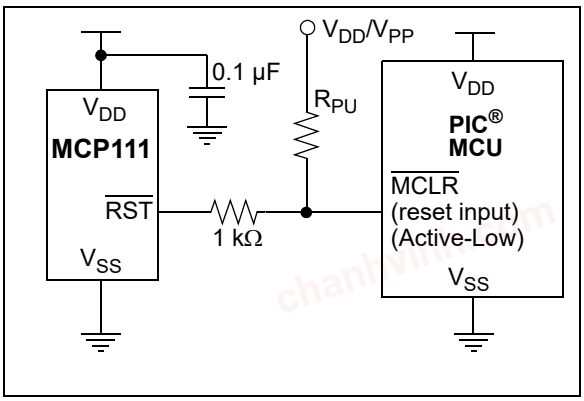


FIGURE 4-4: *Typical Application Circuit for PIC® Microcontroller with the ICSP™ feature.*


© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com


5.0 PACKAGING INFORMATION

5.1 Package Marking Information


3-Lead TO-92

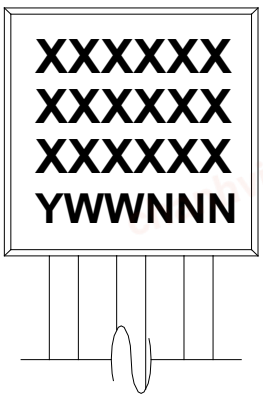

Example:

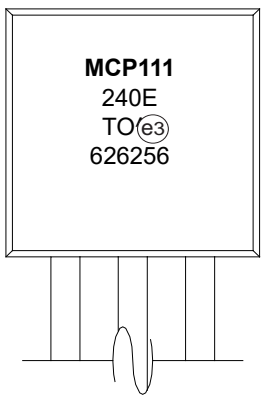


3-Lead SOT-23



Device	Code
MCP111T-195I/TT	MP
MCP111T-240ETT	MQ
MCP111T-270E/TT	MG
MCP111T-290E/TT	NH
MCP111T-300E/TT	MJ
MCP111T-315E/TT	MK
MCP111T-450E/TT	ML
MCP111T-475E/TT	MM
MCP112T-195I/TT	MR
MCP112T-240ETT	MS
MCP112T-270E/TT	MA
MCP112T-290E/TT	MB
MCP112T-300E/TT	MC
MCP112T-315E/TT	MD
MCP112T-450E/TT	ME
MCP112T-475E/TT	MF

Example:



Legend:	XX...X	Product Code or Customer-specific information
	Y	Year code (last digit of calendar year)
	YY	Year code (last 2 digits of calendar year)
	WW	Week code (week of January 1 is week ‘01’)
	NNN	Alphanumeric traceability code
	e3	Pb-free JEDEC designator for Matte Tin (Sn)
	*	This package is Pb-free. The Pb-free JEDEC designator (e3) can be found on the outer packaging for this package.


Note: In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. Package may or not include the corporate logo.

© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com


Package Marking Information (Continued)

3-Lead SC-70



Device	Code
MCP111T-195I/LB	EP
MCP111T-240E/LB	EQ
MCP111T-270E/LB	EG
MCP111T-290E/LB	EH
MCP111T-300E/LB	EJ
MCP111T-315E/LB	EK
MCP111T-450E/LB	EL
MCP111T-475E/LB	EM
MCP112T-195I/LB	ER
MCP112T-240E/LB	ES
MCP112T-270E/LB	EA
MCP112T-290E/LB	EB
MCP112T-300E/LB	EC
MCP112T-315E/LB	ED
MCP112T-450E/LB	EE
MCP112T-475E/LB	EF

Example:




3-Lead SOT-89



Device	Code
MCP111T-195I/MB	MP
MCP111T-240EMB	MQ
MCP111T-270E/MB	MG
MCP111T-290E/MB	NH
MCP111T-300E/MB	MJ
MCP111T-315E/MB	MK
MCP111T-450E/MB	ML
MCP111T-475E/MB	MM
MCP112T-195I/MB	MR
MCP112T-240EMB	MS
MCP112T-270E/MB	MA
MCP112T-290E/MB	MB
MCP112T-300E/MB	MC
MCP112T-315E/MB	MD
MCP112T-450E/MB	ME
MCP112T-475E/MB	MF

Example:



Legend:	XX...X	Product Code or Customer-specific information
	Y	Year code (last digit of calendar year)
	YY	Year code (last 2 digits of calendar year)
	WW	Week code (week of January 1 is week ‘01’)
	NNN	Alphanumeric traceability code
	(e3)	Pb-free JEDEC designator for Matte Tin (Sn)
	*	This package is Pb-free. The Pb-free JEDEC designator ((e3)) can be found on the outer packaging for this package.


Note: In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. Package may or not include the corporate logo.

© 2004-2022 Microchip Technology Inc. and its subsidiaries


chanhvinh.com

3-Lead Plastic Transistor Outline (TO) [TO-92]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

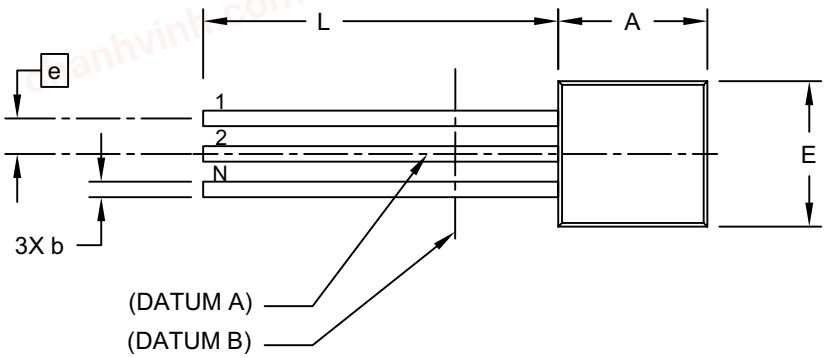

TOP VIEW

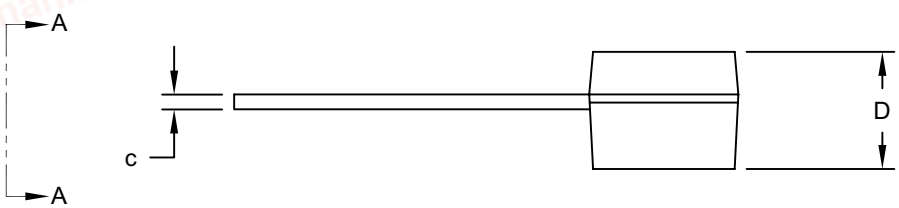

SIDE VIEW



VIEW A-A


Microchip Technology Drawing C04-101 Rev C Sheet 1 of 2

© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

3-Lead Plastic Transistor Outline (TO) [TO-92]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

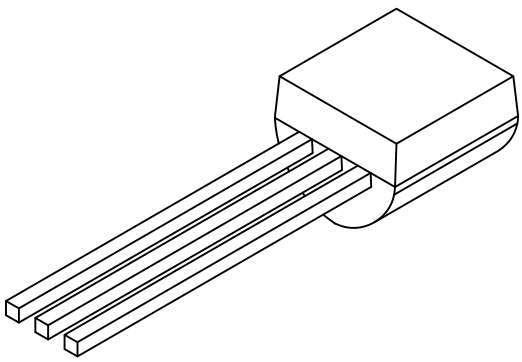

Units		INCHES		
Dimension Limits		MIN	NOM	MAX
Number of Pins	N		3	
Pitch	e		.050 BSC	
Bottom to Package Flat	D	.125	-	.165
Overall Width	E	.175	-	.205
Overall Length	A	.170	-	.210
Molded Package Radius	R	.080	-	.105
Tip to Seating Plane	L	.500	-	-
Lead Thickness	c	.014	-	.021
Lead Width	b	.014	-	.022

Notes:

1. Dimensions D and E do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .005" per side.
2. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.


Microchip Technology Drawing C04-101 Rev C Sheet 2 of 2

© 2004-2022 Microchip Technology Inc. and its subsidiaries


chanhvinh.com

3-Lead Plastic Small Outline Transistor (TT) [SOT-23]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

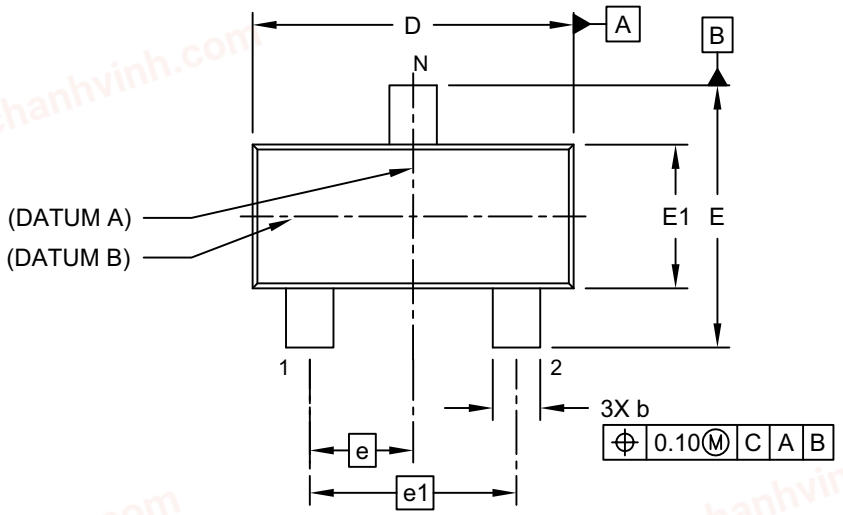

TOP VIEW

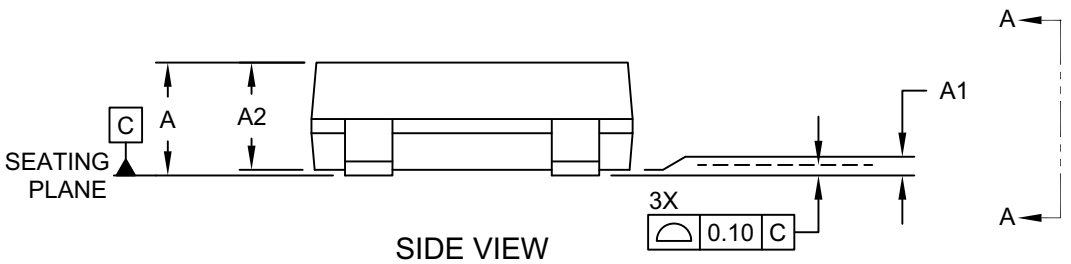

SIDE VIEW

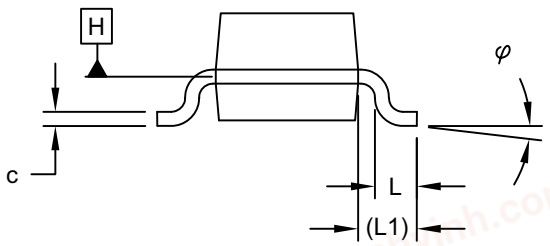


VIEW A-A

Microchip Technology Drawing C04-104 (TT) Rev C Sheet 1 of 2

chanhvinh.com

3-Lead Plastic Small Outline Transistor (TT) [SOT-23]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

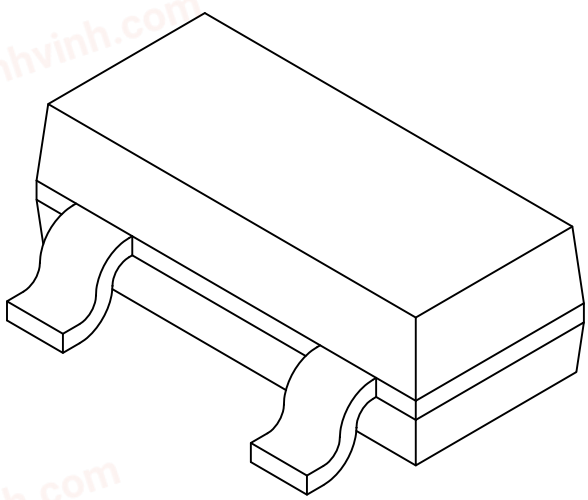

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Pins	N		3	
Lead Pitch	e		0.95 BSC	
Outside Lead Pitch	e1		1.90 BSC	
Overall Height	A	0.89	-	1.12
Molded Package Thickness	A2	0.79	0.95	1.02
Standoff	A1	0.01	-	0.10
Overall Width	E	2.10	-	2.64
Molded Package Width	E1	1.16	1.30	1.40
Overall Length	D	2.67	2.90	3.05
Foot Length	L	0.13	0.50	0.60
Footprint	(L1)		0.42 REF	
Foot Angle	φ	0°	-	10°
Lead Thickness	c	0.08	-	0.20
Lead Width	b	0.30	-	0.54

Notes:

1. Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.127mm per side.
2. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.


Microchip Technology Drawing C04-104 (TT) Rev C Sheet 2 of 2

© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

3-Lead Plastic Small Outline Transistor (TT) [SOT-23]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

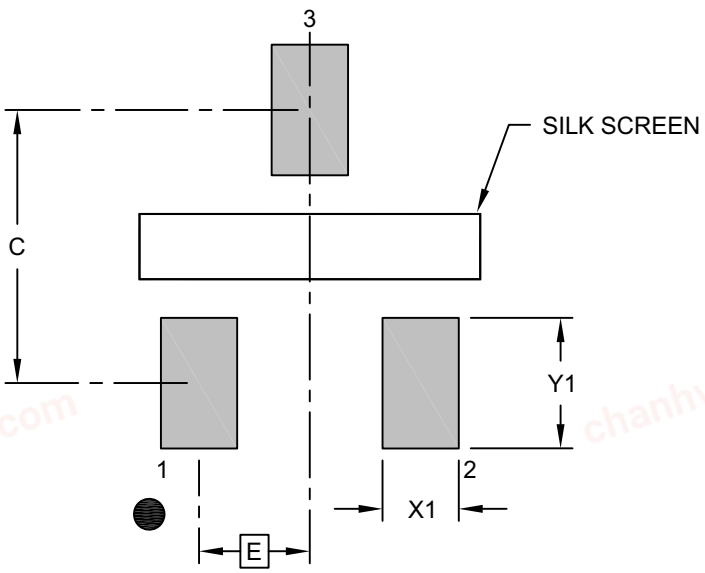

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E		0.95 BSC	
Contact Pad Spacing	C		2.30	
Contact Pad Width (X3)	X1			0.65
Contact Pad Length (X3)	Y1			1.10

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process


Microchip Technology Drawing C04-2104 (TT) Rev B

© 2004-2022 Microchip Technology Inc. and its subsidiaries


chanhvinh.com

3-Lead Plastic Small Outline Transistor (LB) [SC70]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

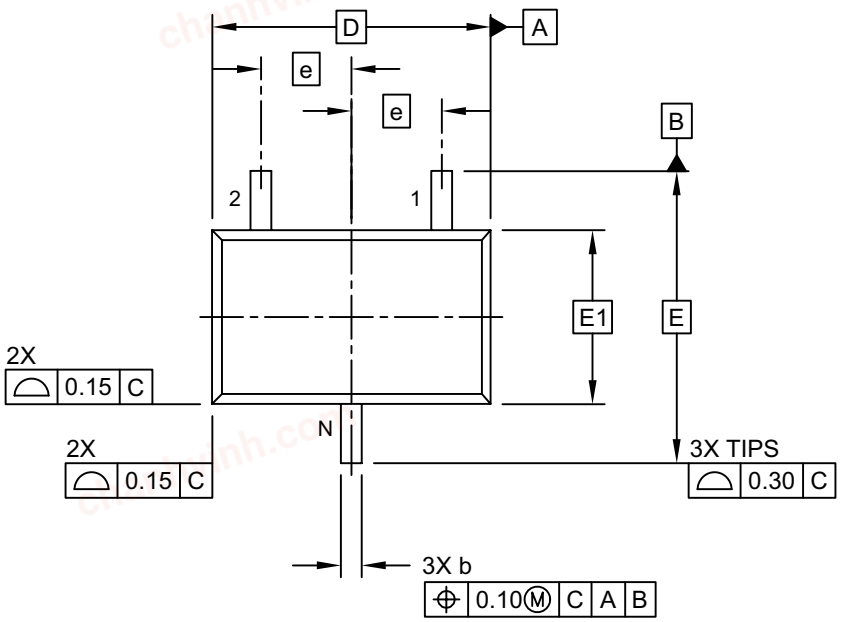

TOP VIEW

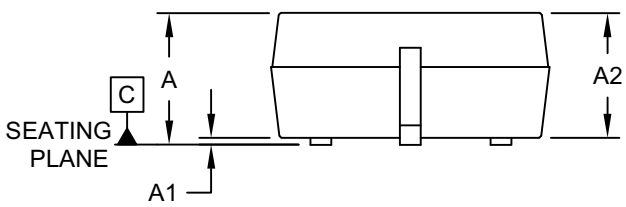

SIDE VIEW

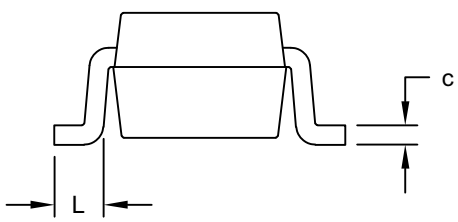

END VIEW


Microchip Technology Drawing C04-060 Rev E Sheet 1 of 2

© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

3-Lead Plastic Small Outline Transistor (LB) [SC70]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

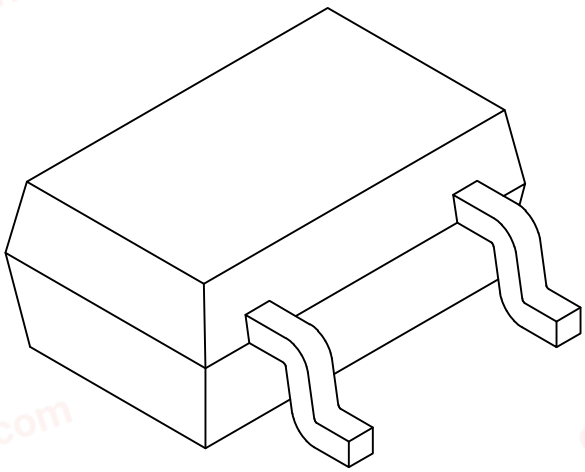

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Pins	N		3	
Pitch	e		0.65 BSC	
Overall Height	A	0.80	-	1.10
Standoff	A1	0.00	-	0.10
Molded Package Thickness	A2	0.80	-	1.00
Overall Length	D		2.00 BSC	
Overall Width	E		2.10 BSC	
Molded Package Width	E1		1.25 BSC	
Terminal Width	b	0.15	-	0.40
Terminal Length	L	0.10	0.20	0.46
Lead Thickness	c	0.08	-	0.26

Notes:

1. Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.15mm per side.
2. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.


Microchip Technology Drawing C04-060 Rev E Sheet 2 of 2

© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

3-Lead Plastic Small Outline Transistor (LB) [SC70]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

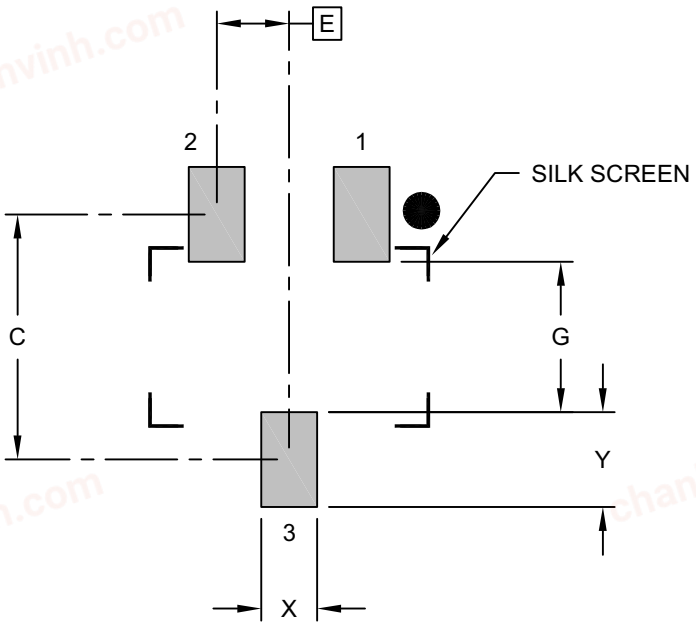

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E		0.65 BSC	
Contact Pad Spacing	C		2.20	
Contact Pad Width	X			0.50
Contact Pad Length	Y			0.85
Distance Between Pads	G	1.25		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.


Microchip Technology Drawing No. C04-2060 Rev D

© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

3-Lead Plastic Small Outline Transistor (MB) - [SOT-89]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

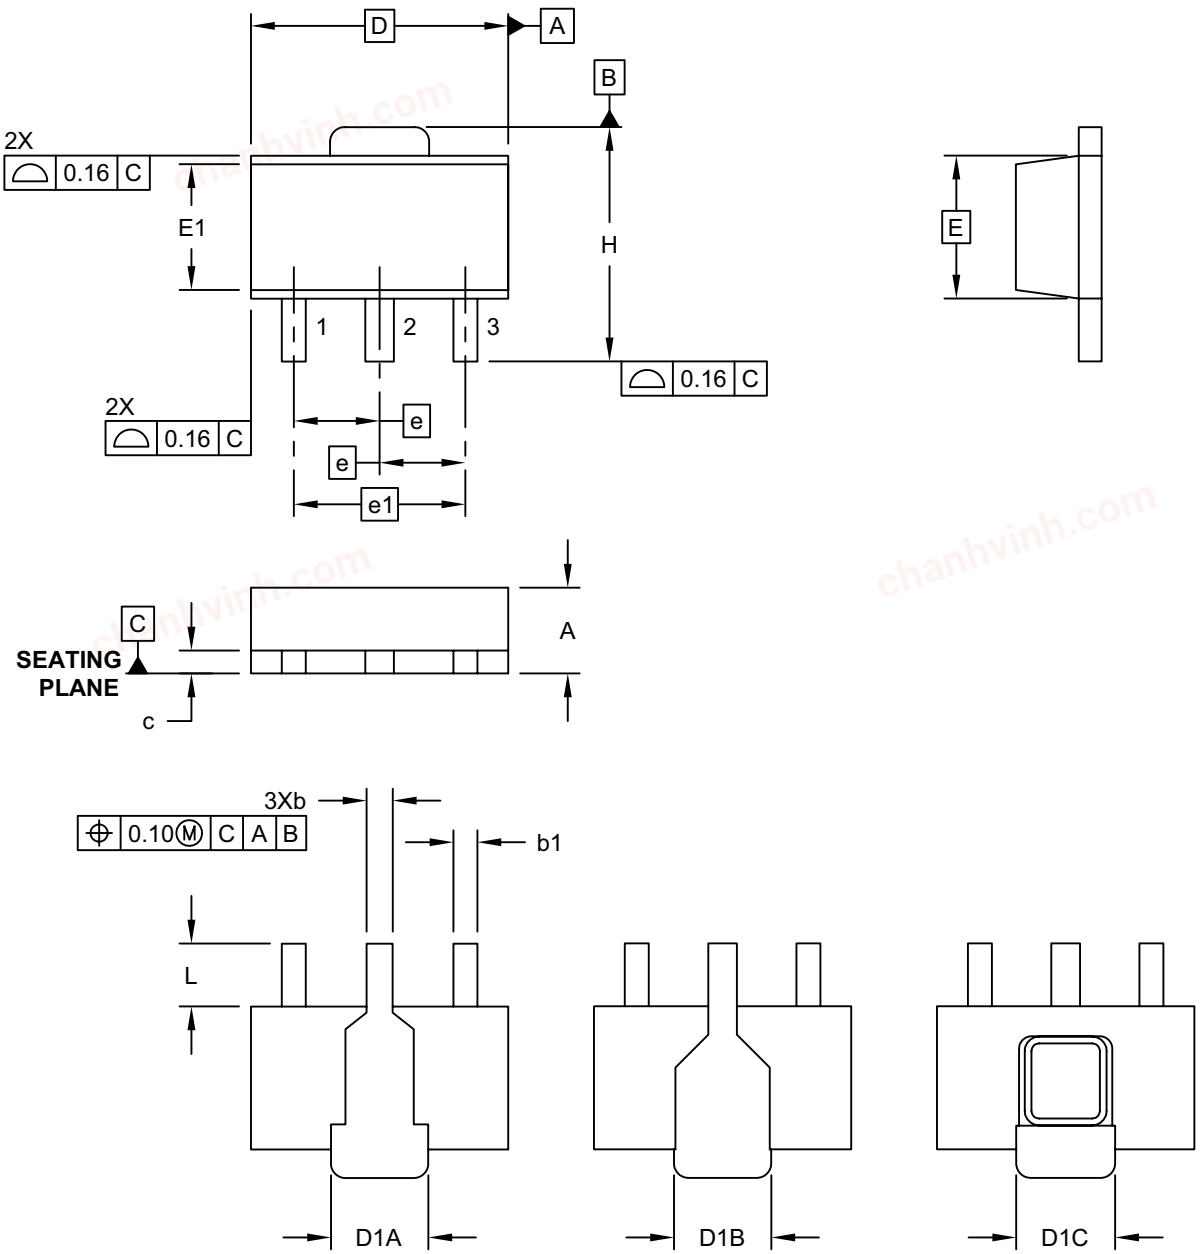


OPTIONAL BACKSIDE PATTERNS — PARTS MAY BE SUPPLIED WITH ANY PATTERN SHOWN

Microchip Technology Drawing C04-029C Sheet 1 of 2

chanhvinh.com

3-Lead Plastic Small Outline Transistor (MB) - [SOT-89]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

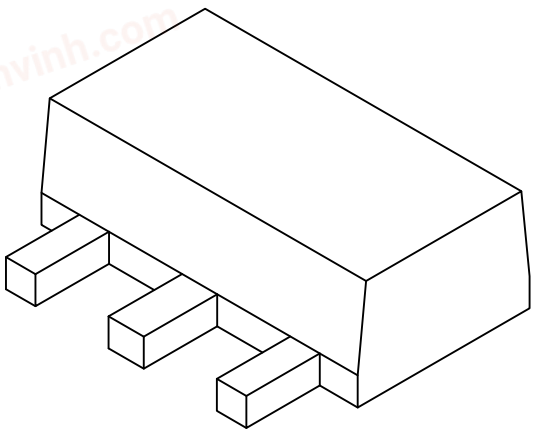

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Leads	N		3	
Pitch	e		1.50 BSC	
Outside Lead Pitch	e1		3.00 BSC	
Overall Height	A	1.40	1.50	1.60
Overall Width	H	3.94	4.10	4.25
Molded Package Width at Base	E		2.50 BSC	
Molded Package Width at Top	E1	2.13	2.20	2.29
Overall Length	D		4.50 BSC	
Tab Length (Option A)	D1A	1.63	1.73	1.83
Tab Length (Option B)	D1B	1.40	1.60	1.75
Tab Length (Option C)	D1C	1.62	1.73	1.83
Foot Length	L	0.79	1.10	1.20
Lead Thickness	c	0.35	0.40	0.44
Lead 2 Width	b	0.41	0.50	0.56
Leads 1 & 3 Width	b1	0.36	0.42	0.48

Notes:

1. Dimensions D and E do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.127mm per side.
2. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.


Microchip Technology Drawing C04-029C Sheet 2 of 2

© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

3-Lead Plastic Small Outline Transistor (MB) - [SOT-89]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

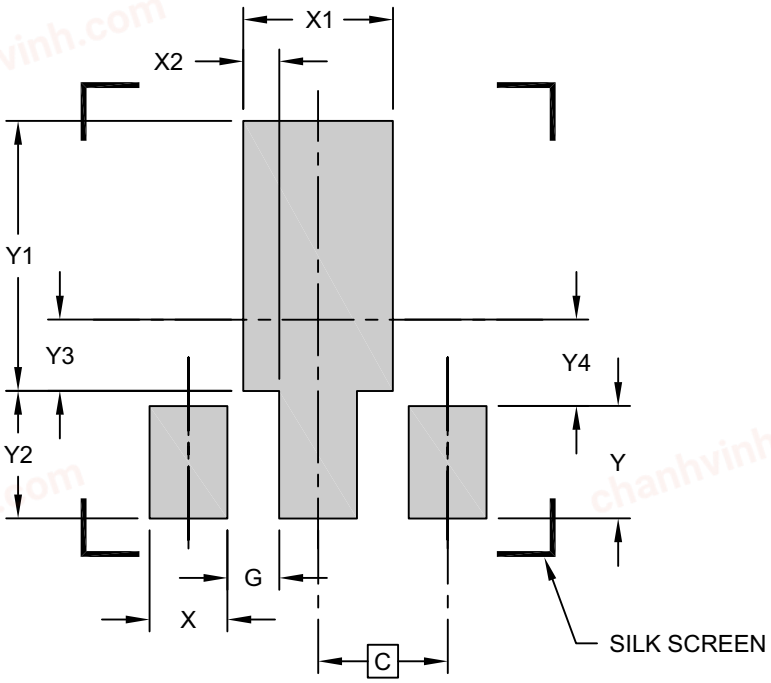

RECOMMENDED LAND PATTERN

Units	MILLIMETERS		
Dimension Limits	MIN	NOM	MAX
C		1.50 (BSC)	
X (3 PLACES)		0.900	
X1		1.733	
X2 (2 PLACES)		0.416	
G (2 PLACES)		0.600	
Y (2 PLACES)		1.300	
Y1		3.125	
Y2		1.475	
Y3		0.825	
Y4		1.000	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-2029C

chanhvinh.com

5.2 Product Tape and Reel Specifications

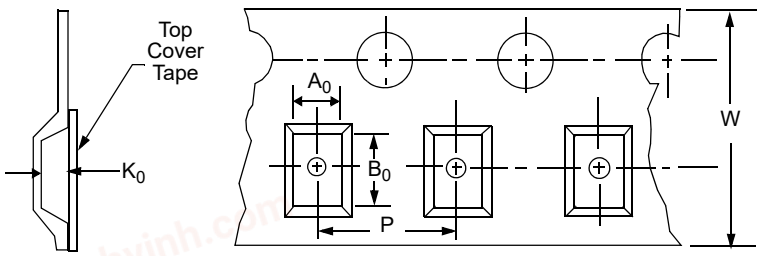


FIGURE 5-1: *Embossed Carrier Dimensions (8, 12, 16 and 24 mm tape only).*

CARRIER TAPE/CAVITY DIMENSIONS

Case Outline	Package Type		Carrier Dimensions		Cavity Dimensions			Output Quantity Units	Reel Diameter in mm
			W mm	P mm	A0 mm	B0 mm	K0 mm		
TT	SOT-23	3L	8	4	3.15	2.77	1.22	3000	180
LB	SC-70	3L	8	4	2.4	2.4	1.19	3000	180


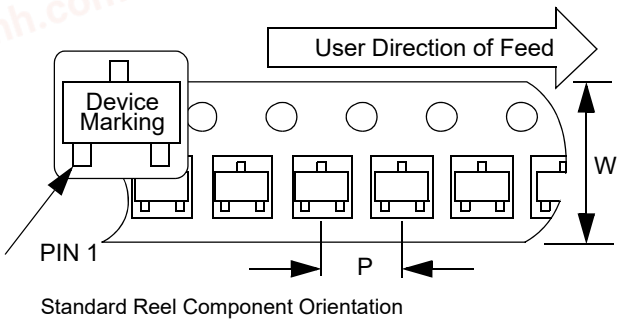


FIGURE 5-2: *3-Lead SOT-23/SC70 Device Tape and Reel Specifications.*

© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

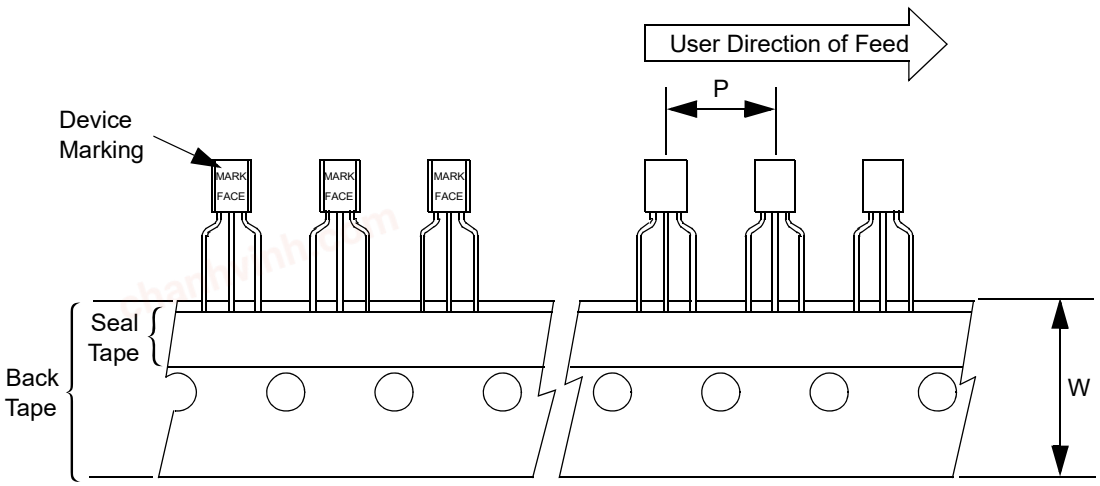

Note: Bent leads are for Tape and Reel only.

FIGURE 5-3: *TO-92 Devices.*

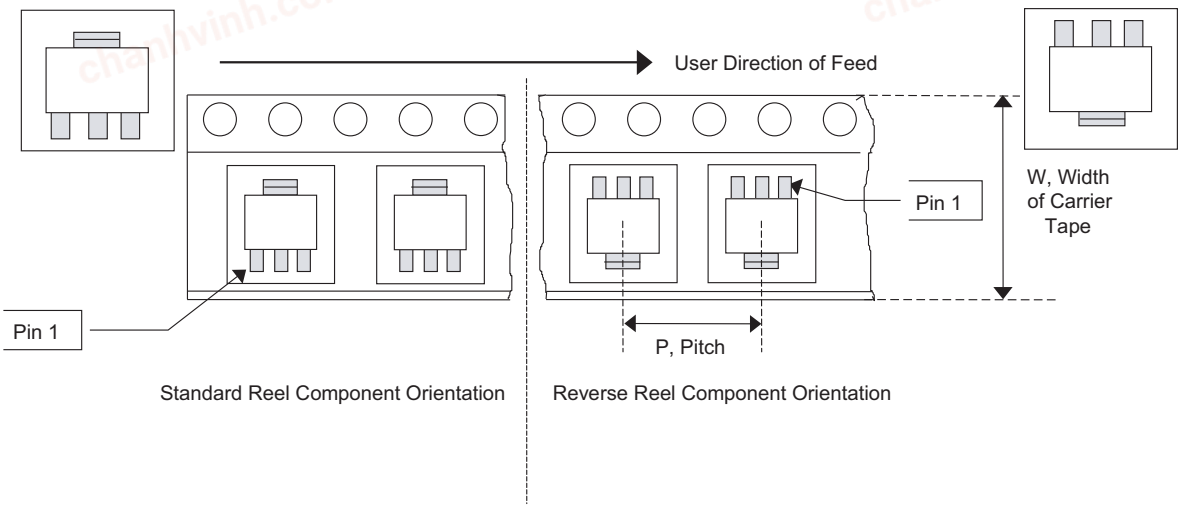


FIGURE 5-4: *SOT-89 Devices.*

chanhvinh.com

NOTES:

chanhvinh.com

© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

APPENDIX A: REVISION HISTORY

Revision G (November 2022)

- Updated document layout.
- Added automotive qualification to Features and examples to Product Identification System.
- Updated Absolute Maximum Ratings and **Section 5.0 "Packaging information"**.

Revision F (July 2016)

- Updated Table 3-1.
- Updated **Section 5.0 "Packaging information"**.
- Minor typographical corrections.

Revision E (January 2013)

- Added a note to each package outline drawing.

Revision D (June 2005)

- Added SOT-89-3 package information throughout.

Revision C (March 2005)

- Added **Section 4.4 "Using in PIC® Microcontroller ICSP™ Applications (MCP111 only)"** on using the MCP111 in PIC microcontroller ICSP applications.
- Added V_{ODH} specifications in **Section 1.0 "Electrical Characteristics"** (for ICSP applications).
- Added Figure 2-28.
- Added devices features table to page 1.
- Updated SC-70 package markings and added Pb-free marking information to **Section 5.0 "Packaging information"**.
- Added **Appendix A: "Revision History"**.

Revision B (August 2004)

- Corrected package marking information in **Section 5.0 "Packaging information"**.

Revision A (May 2004)

- Original release of this document.

© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

NOTES:

chanhvinh.com

© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

PART NO.	X[1]	XXX	X	XX	XXX
Device	Tape/Reel Option	Monitoring Options	Temperature Range	Package	Qualification

Device: MCP111: MicroPower Voltage Detector, open-drain
MCP112: MicroPower Voltage Detector, push-pull

Tape and Reel Option:
(blank) = BAG (1000/BAG)
T = Tape and Reel (3000/Reel)

Monitoring Options:
195 = 1.90V
240 = 2.32V
270 = 2.63V
290 = 2.90V
300 = 2.93V
315 = 3.08V
450 = 4.38V
475 = 4.63V

Temperature Range:
I = –40°C to +85°C (MCP11X-195 only)
E = –40°C to +125°C (Except MCP11X-195 only)

Package:
LB = SC-70, 3-lead
MB = SOT-89, 3-lead
TO = TO-92, 3-lead
TT = SOT-23B, 3-lead

Qualification*:
(Blank) = Standard Part
VAO = Automotive AEC-Q100 Qualified

*Currently available VAO variants are:
MCP111T-315E/MBVAO, MCP111T-270E/LBVAO, MCP111T-300E/LBVAO, MCP111T-315E/LBVAO, MCP111T-290E/LBVAO, MCP111T-270E/TTVAO, MCP111T-290E/TTVAO, MCP111T-300E/TTVAO, MCP111T-315E/TTVAO, MCP111T-450E/TTVAO.

Contact your local Microchip sales office to request automotive qualified variants for other package types or voltage options.

Examples:

a) MCP111T-195I/TT: Tape and Reel, 1.90V option, open-drain, –40°C to +85°C, SOT-23B package.
b) MCP111T-315E/LB: Tape and Reel, 3.08V option, open-drain, –40°C to +125°C, SC-70-3 package.
c) MCP111-300E/TO: 2.93V option, open-drain, –40°C to +125°C, 3-Lead TO-92 package.
d) MCP111-315E/MB: 3.08V option, open-drain, –40°C to +125°C, SOT-89-3 package.
e) MCP111T-270E/LBVAO: Tape and Reel, 2.63V option, open-drain, –40°C to +125°C, 3-lead SC-70 package, Automotive Qualified.
f) MCP111T-290E/TTVAO: Tape and Reel, 2.90V, open-drain, –40°C to +125°C, 3-lead SOT-23B package, Automotive Qualified.
g) MCP111T-450E/TTVAO: Tape and Reel, 4.38V, open-drain, –40°C to +125°C, 3-lead SOT-23B package, Automotive Qualified.
h) MCP111T-315E/MBVAO: Tape and Reel 3.08V option, open-drain, –40°C to +125°C, 3-lead SOT-89 package, Automotive Qualified.

a) MCP112T-290E/TT: Tape and Reel, 2.90V option, push-pull, –40°C to +125°C, SOT-23B-3 package.
b) MCP112T-475E/LB: Tape and Reel, 4.63V option, push-pull, –40°C to +125°C, SC-70-3 package.
c) MCP112-450E/TO: 4.38V option, push-pull, –40°C to +125°C, TO-92-3 package.
d) MCP112-315E/MB: 3.08V option, push-pull, –40°C to +125°C, SOT-89-3 package.

Note 1: Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.

© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

NOTES:

chanhvinh.com

© 2004-2022 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable" Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at https://www.microchip.com/en-us/support/design-help/client-support-services.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.

Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet- Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, TrueTime, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, Clockstudio, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, GridTime, IdealBridge, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, IntelliMOS, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, KoD, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQI, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, Trusted Time, TSHARC, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2004-2022, Microchip Technology Incorporated and its subsidiaries.

All Rights Reserved.

ISBN: 978-1-6683-1587-3

chanhvinh.com

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
http://www.microchip.com/support
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

Raleigh, NC
Tel: 919-844-7510

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110
Tel: 408-436-4270

Canada - Toronto
Tel: 905-695-1980
Fax: 905-695-2078

ASIA/PACIFIC

Australia - Sydney
Tel: 61-2-9868-6733

China - Beijing
Tel: 86-10-8569-7000

China - Chengdu
Tel: 86-28-8665-5511

China - Chongqing
Tel: 86-23-8980-9588

China - Dongguan
Tel: 86-769-8702-9880

China - Guangzhou
Tel: 86-20-8755-8029

China - Hangzhou
Tel: 86-571-8792-8115

China - Hong Kong SAR
Tel: 852-2943-5100

China - Nanjing
Tel: 86-25-8473-2460

China - Qingdao
Tel: 86-532-8502-7355

China - Shanghai
Tel: 86-21-3326-8000

China - Shenyang
Tel: 86-24-2334-2829

China - Shenzhen
Tel: 86-755-8864-2200

China - Suzhou
Tel: 86-186-6233-1526

China - Wuhan
Tel: 86-27-5980-5300

China - Xian
Tel: 86-29-8833-7252

China - Xiamen
Tel: 86-592-2388138

China - Zhuhai
Tel: 86-756-3210040

ASIA/PACIFIC

India - Bangalore
Tel: 91-80-3090-4444

India - New Delhi
Tel: 91-11-4160-8631

India - Pune
Tel: 91-20-4121-0141

Japan - Osaka
Tel: 81-6-6152-7160

Japan - Tokyo
Tel: 81-3-6880- 3770

Korea - Daegu
Tel: 82-53-744-4301

Korea - Seoul
Tel: 82-2-554-7200

Malaysia - Kuala Lumpur
Tel: 60-3-7651-7906

Malaysia - Penang
Tel: 60-4-227-8870

Philippines - Manila
Tel: 63-2-634-9065

Singapore
Tel: 65-6334-8870

Taiwan - Hsin Chu
Tel: 886-3-577-8366

Taiwan - Kaohsiung
Tel: 886-7-213-7830

Taiwan - Taipei
Tel: 886-2-2508-8600

Thailand - Bangkok
Tel: 66-2-694-1351

Vietnam - Ho Chi Minh
Tel: 84-28-5448-2100

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4485-5910
Fax: 45-4485-2829

Finland - Espoo
Tel: 358-9-4520-820

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Garching
Tel: 49-8931-9700

Germany - Haan
Tel: 49-2129-3766400

Germany - Heilbronn
Tel: 49-7131-72400

Germany - Karlsruhe
Tel: 49-721-625370

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Rosenheim
Tel: 49-8031-354-560

Israel - Ra'anana
Tel: 972-9-744-7705

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Padova
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Norway - Trondheim
Tel: 47-7288-4388

Poland - Warsaw
Tel: 48-22-3325737

Romania - Bucharest
Tel: 40-21-407-87-50

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Gothenberg
Tel: 46-31-704-60-40

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820

© 2004-2022 Microchip Technology Inc. and its subsidiaries