chanhvinh.com

MIC5213

SC-70 µCap Low Dropout Regulator

Features

- SC-70-5 Package
- Wide Selection of Output Voltages
- Ensured 80 mA Output
- Low Quiescent Current
- Low Dropout Voltage
- Tight Load and Line Regulation
- Low Temperature Coefficient
- Current and Thermal Limiting
- Reversed Input Polarity Protection
- Zero Off-Mode Current
- Logic-Controlled Shutdown
- Stable with Low-ESR Ceramic Capacitors

Applications

- Cellular Phones
- Laptop, Notebook, and Palmtop Computers
- Battery-Powered Equipment
- Barcode Scanners
- SMPS Post-Regulator/DC-DC Modules
- High-Efficiency Linear Power Supplies

General Description

The MIC5213 is a µCap 80 mA linear voltage regulator in the 5-lead SC-70 package. Featuring half the footprint of the standard SOT-23 package, this SC-70 regulator has very low dropout voltage (typically 20 mV at light loads and 300 mV at 80 mA) and very low ground current (225 µA at 20 mA output). It also offers better than 3% initial accuracy and includes a logic-compatible enable input.


The µCap regulator design is optimized to work with low-value, low-cost ceramic capacitors. The outputs typically require only 0.47 µF of output capacitance for stability.

Designed especially for hand-held, battery-powered devices, the MIC5213 can be controlled by a CMOS or TTL compatible logic signal. When disabled, power consumption drops nearly to zero. If on-off control is not required, the enable pin may be tied to the input for 3-terminal operation. The ground current of the MIC5213 increases only slightly in dropout, further prolonging battery life. Key MIC5213 features include current limiting, over temperature shutdown, and protection against reversed battery.

The MIC5213 is available in 2.5V, 2.6V, 2.7V, 2.8V, 3.0V, 3.3V, 3.6V, and 5.0V fixed voltages. Other voltages are available; contact Microchip for details.

Package Type


MIC5213
5-Lead SC-70 (C5)
(Top View)



© 2023 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

Typical Application Circuit

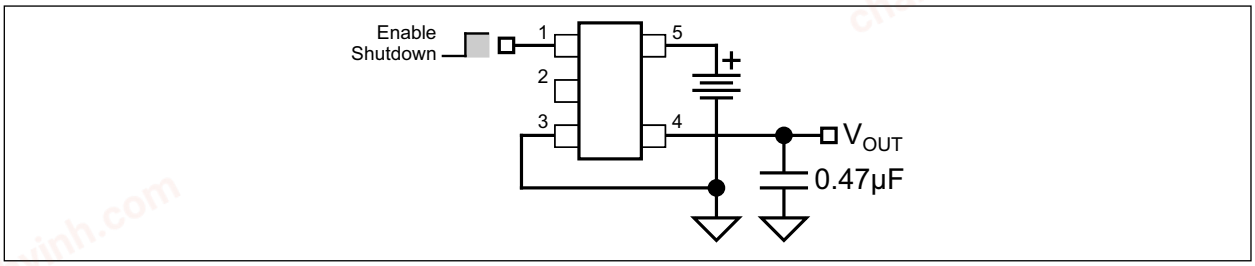

© 2023 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

1.0 ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings †

Input Supply Voltage (V_{IN}) ..... –20V to +20V
Enable Input Voltage (V_{EN}) ..... –20V to +20V
Power Dissipation (P_D, Note 1) ..... Internally Limited
ESD Rating ..... Note 2

Operating Ratings ‡

Input Voltage (V_{IN}) ..... +2.5V to +16V
Enable Input Voltage (V_{EN}) ..... 0V to V_{IN}

† Notice: Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational sections of this specification is not intended. Exposure to maximum rating conditions for extended periods may affect device reliability.

‡ Notice: The device is not guaranteed to function outside its operating ratings.

Note 1: The maximum allowable power dissipation is a function of the maximum junction temperature, $T_{J(MAX)}$, the junction-to-ambient thermal resistance, θ_{JA}, and the ambient temperature, T_A. The maximum allowable power dissipation at any ambient temperature is calculated using: $P_{D(MAX)} = (T_{J(MAX)} - T_A) \div \theta_{JA}$. Exceeding the maximum allowable power dissipation will result in excessive die temperature and the regulator will go into thermal shutdown.

2: Device is ESD sensitive. Handling precautions recommended.

ELECTRICAL CHARACTERISTICS

$V_{IN} = V_{OUT} + 1V$; I_L = 1 mA; C_L = 0.47 µF; $V_{EN} \geq 2.0V$; T_J = +25°C, **bold** values valid for –40°C ≤ T_J ≤ +125°C; unless noted.

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Output Voltage Accuracy	V_O	–3	—	3	%	—
		–4	—	**4**		
Output Voltage Temperature Coefficient	$\Delta V_O/\Delta T$	—	**50**	**200**	ppm/°C	Note 1
Line Regulation	$\Delta V_O/V_O$	—	0.008	0.3	%	$V_{IN} = V_{OUT}$ + 1V to 16V
		—	—	**0.5**		
Load Regulation	$\Delta V_O/V_O$	—	0.08	0.3	%	I_L = 0.1 mA to 80 mA, Note 2
		—	—	**0.5**		
Dropout Voltage (Note 3)	$V_{IN} - V_O$	—	20	—	mV	I_L = 100 µA
		—	200	**350**		I_L = 20 mA
		—	250	—		I_L = 50 mA
		—	280	**600**		I_L = 80 mA
Quiescent Current	I_Q	—	0.01	10	µA	$V_{EN} \leq 0.4V$ (shutdown)
Ground Pin Current (Note 4)	I_{GND}	—	180	—	µA	I_L = 100 µA, $V_{EN} \geq 2.0V$ (active)
		—	225	**750**		I_L = 20 mA, $V_{EN} \geq 2.0V$ (active)
		—	850	—		I_L = 50 mA, $V_{EN} \geq 2.0V$ (active)
		—	1800	**3000**		I_L = 80 mA, $V_{EN} \geq 2.0V$ (active)
Ground Pin Current in Dropout	I_{GNDDO}	—	200	**300**	µA	$V_{IN} = V_{OUT(NOM)} - 0.5V$, Note 4
Current Limit	I_{LIM}	—	180	**250**	mA	V_{OUT} = 0V
Thermal Regulation	$\Delta V_O/\Delta P_D$	—	0.05	—	%/W	Note 5

© 2023 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

ELECTRICAL CHARACTERISTICS (CONTINUED)

$V_{IN} = V_{OUT} + 1V$; $I_L = 1$ mA; $C_L = 0.47$ µF; $V_{EN} \geq 2.0V$; $T_J = +25°C$, **bold** values valid for $–40°C \leq T_J \leq +125°C$; unless noted.

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Enable Input						
Enable Input Voltage Level	V_{IL}	—	—	**0.6**	V	Logic low (off)
	V_{IH}	**2.0**	—	—		Logic high (on)
Enable Input Current	I_{IL}	—	0.01	1	µA	$V_{IL} \leq 0.6V$
	I_{IH}	—	8	**50**		$V_{IH} \geq 2.0V$

Note 1: Output voltage temperature coefficient is defined as the worst case voltage change divided by the total temperature range.

2: Regulation is measured at constant junction temperature using low duty cycle pulse testing. Changes in output voltage due to heating effects are covered by the thermal regulation specification.

3: Dropout voltage is defined as the input-to-output differential at which the output voltage drops 2% below its nominal value measured at 1V differential.

4: Ground pin current is the regulator quiescent current plus pass transistor base current. The total current drawn from the supply is the sum of the load current plus the ground current.

5: Thermal regulation is defined as the change in out voltage at a time (t) after a change in power dissipation is applied, excluding load or line regulation effects. Specifications are for an 80 mA load pulse at $V_{IN} = 16V$ for t = 10 ms.

TEMPERATURE SPECIFICATIONS

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Temperature Ranges						
Junction Temperature Range	T_J	–40	—	+125	°C	—
Storage Temperature	T_S	–60	—	+150	°C	—
Lead Temperature	T_{LEAD}	—	—	+260	°C	Soldering, 5 sec.
Package Thermal Resistances						
Thermal Resistance, SC-70 5-Ld	θ_{JA}	—	450	—	°C/W	—

© 2023 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

2.0 TYPICAL PERFORMANCE CURVES

Note: The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

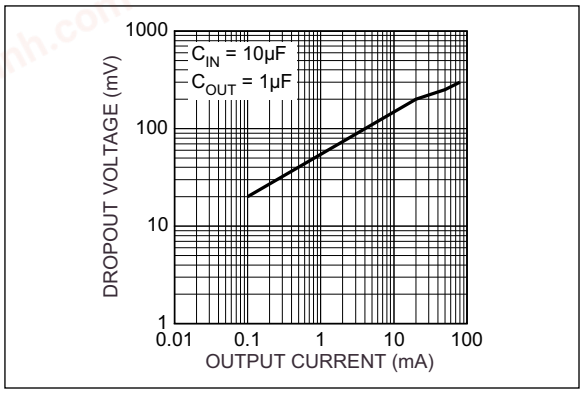


FIGURE 2-1: *Dropout Voltage vs. Output Current.*

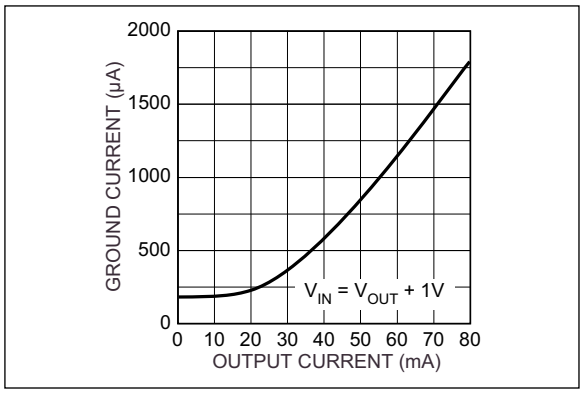


FIGURE 2-4: *Ground Current vs. Output Current.*

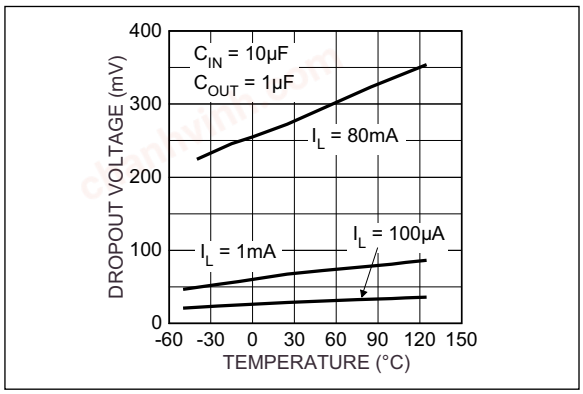


FIGURE 2-2: *Dropout Voltage vs. Temperature.*

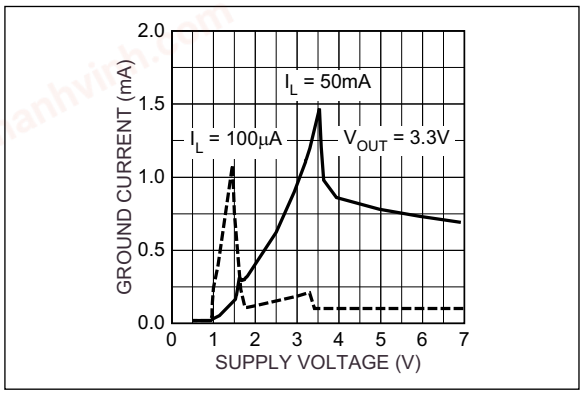


FIGURE 2-5: *Ground Current vs. Supply Voltage.*

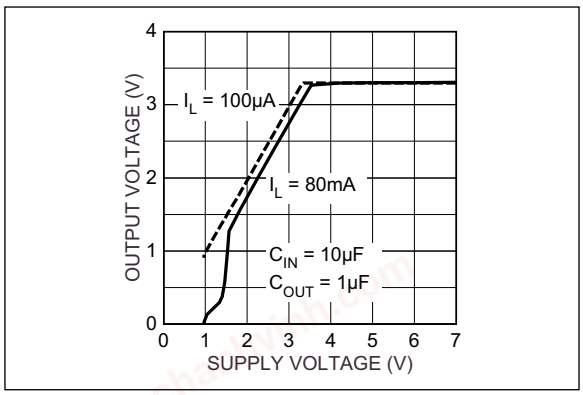


FIGURE 2-3: *Dropout Characteristics.*

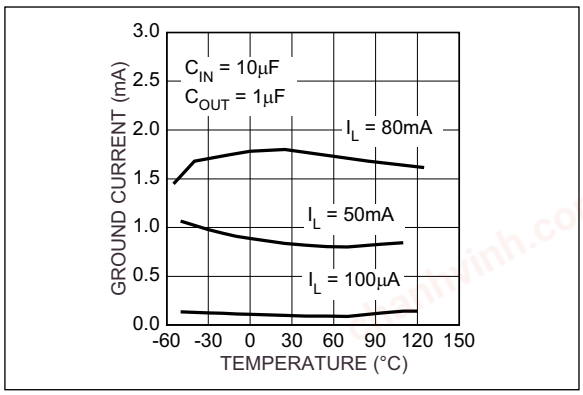


FIGURE 2-6: *Ground Current vs. Temperature.*

chanhvinh.com

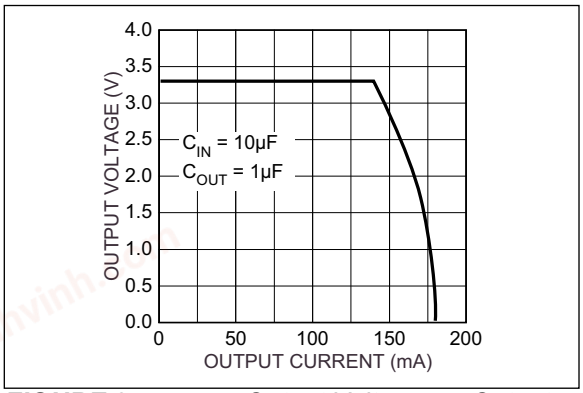


FIGURE 2-7: *Output Voltage vs. Output Current.*

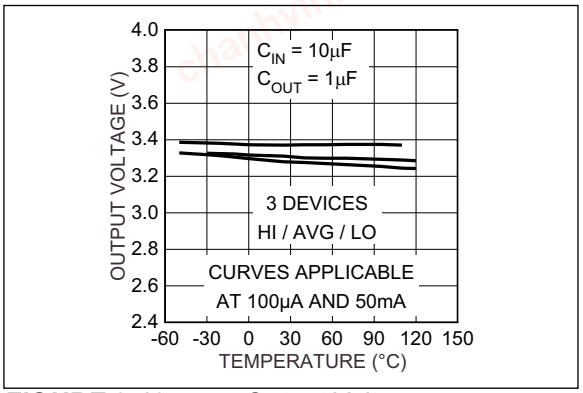


FIGURE 2-10: *Output Voltage vs. Temperature.*

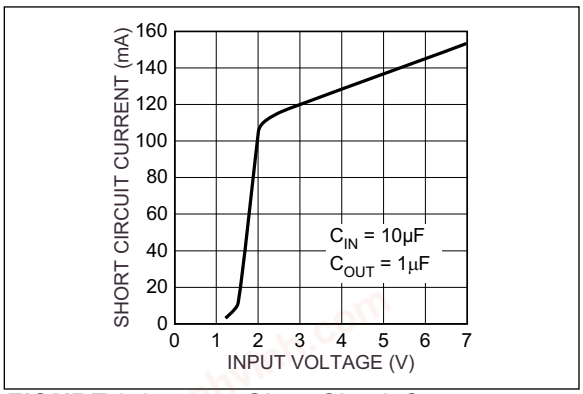


FIGURE 2-8: *Short-Circuit Current vs. Input Voltage.*

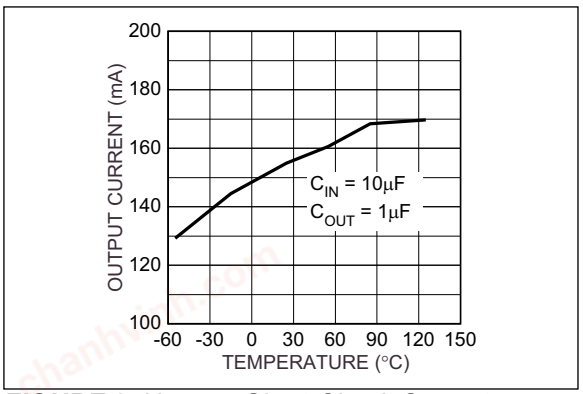


FIGURE 2-11: *Short-Circuit Current vs. Temperature.*

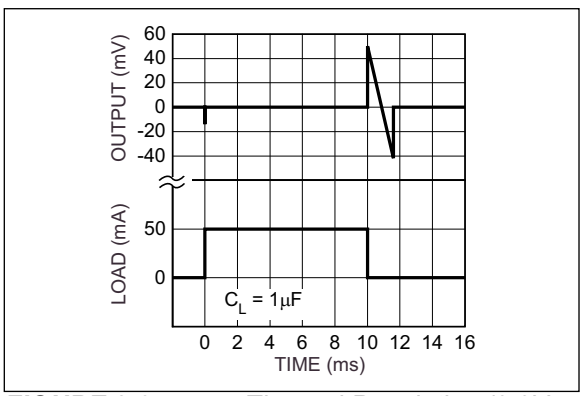


FIGURE 2-9: *Thermal Regulation (3.3V Version).*

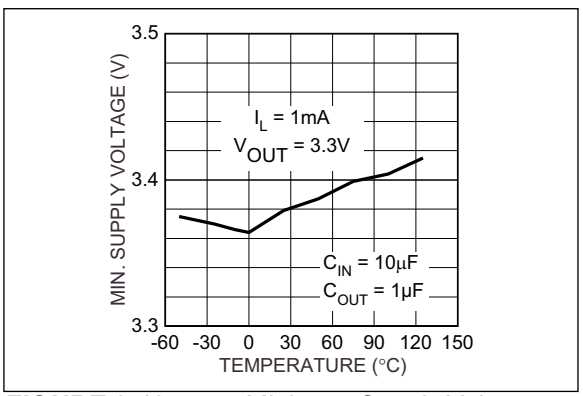


FIGURE 2-12: *Minimum Supply Voltage vs. Temperature.*

© 2023 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

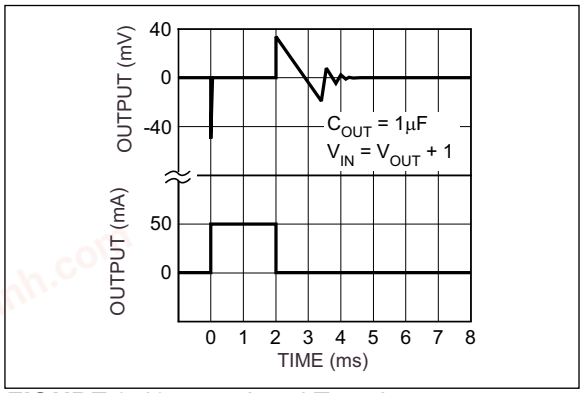


FIGURE 2-13: *Load Transient.*

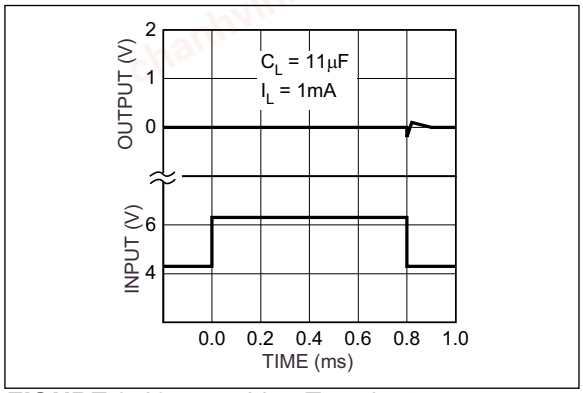


FIGURE 2-16: *Line Transient.*

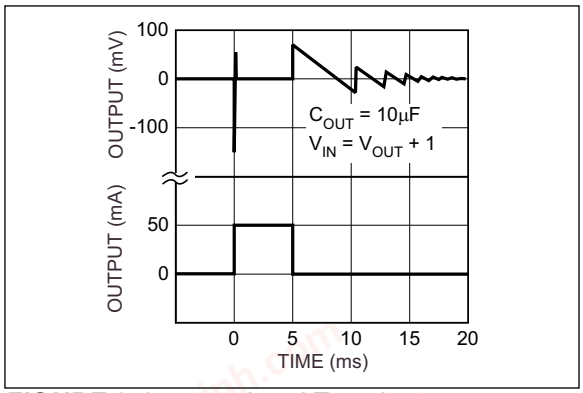


FIGURE 2-14: *Load Transient.*

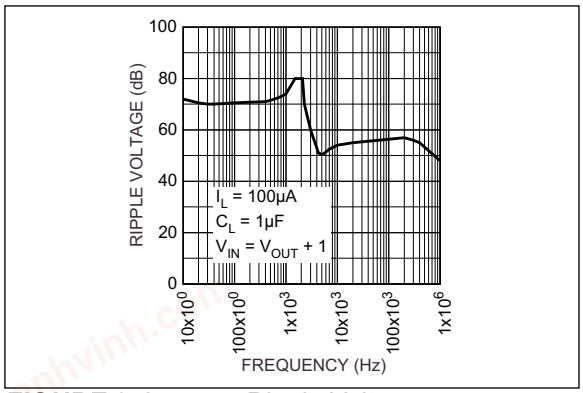


FIGURE 2-17: *Ripple Voltage vs. Frequency.*

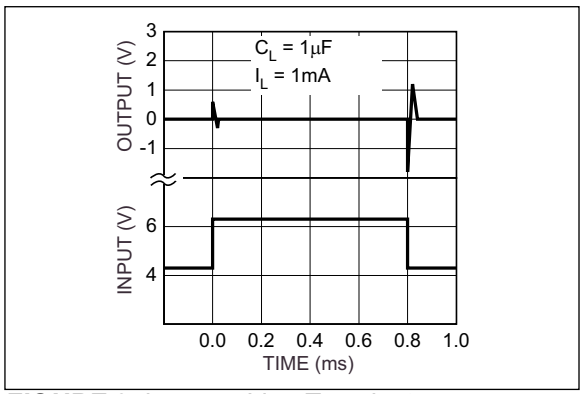


FIGURE 2-15: *Line Transient.*

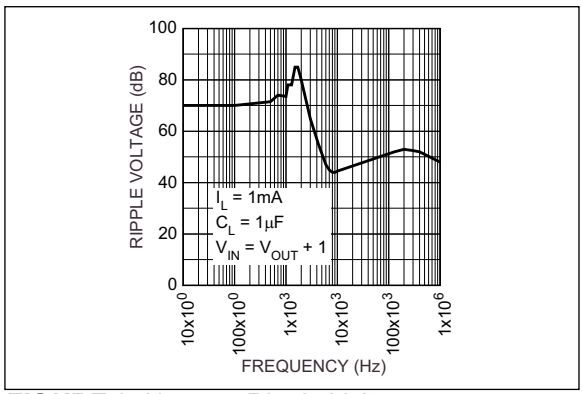


FIGURE 2-18: *Ripple Voltage vs. Frequency.*

chanhvinh.com

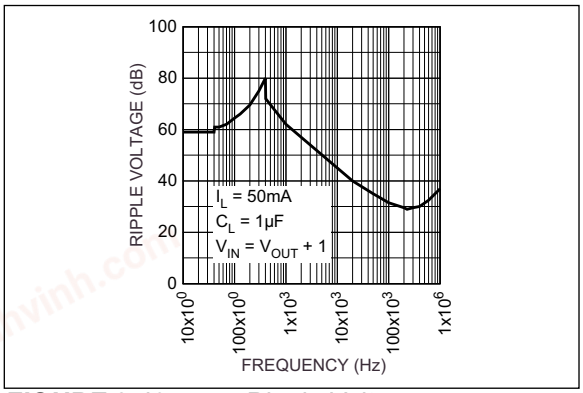


FIGURE 2-19: *Ripple Voltage vs. Frequency.*

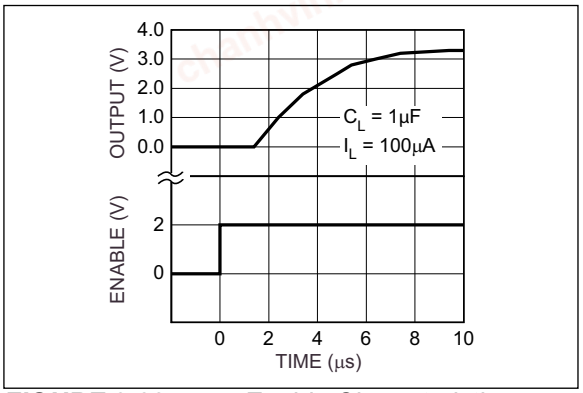


FIGURE 2-22: *Enable Characteristics (3.3V Version).*

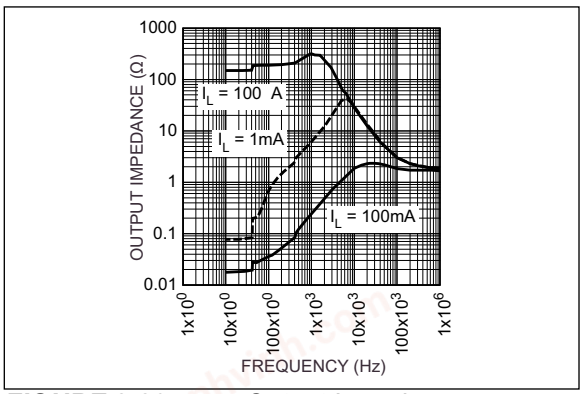


FIGURE 2-20: *Output Impedance.*

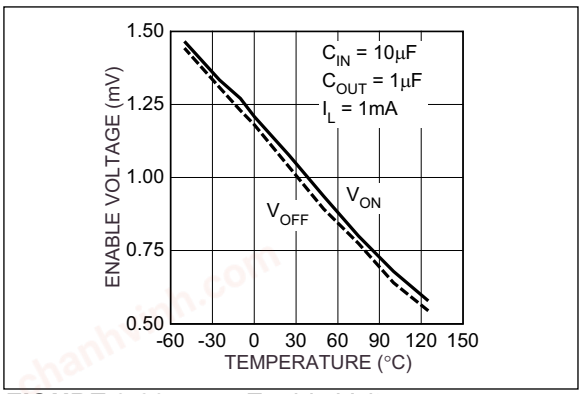


FIGURE 2-23: *Enable Voltage vs. Temperature*

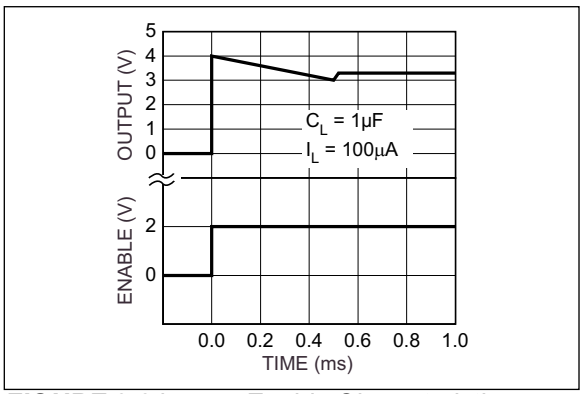


FIGURE 2-21: *Enable Characteristics (3.3V Version).*

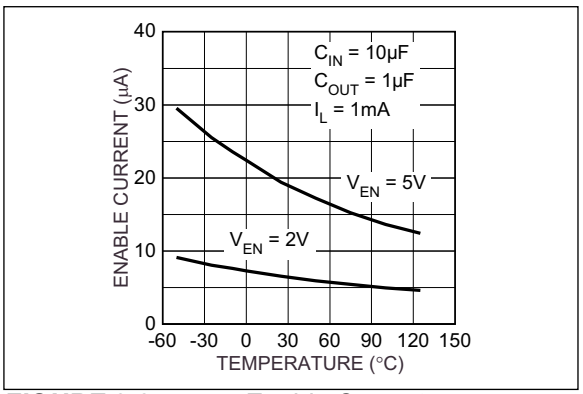


FIGURE 2-24: *Enable Current vs. Temperature.*

© 2023 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

3.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in Table 3-1.

TABLE 3-1: PIN FUNCTION TABLE

Pin Number	Pin Name	Description
1	EN	Enable (Input): TTL/CMOS compatible control input. Logic high = enabled; logic low or open = shutdown.
2	NC	Not internally connected.
3	GND	Ground.
4	OUT	Regulator output.
5	IN	Supply input.

© 2023 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

4.0 APPLICATION INFORMATION

4.1 Input Capacitor

A 0.1 µF capacitor should be placed from IN to GND if there is more than 10 inches of wire between the input and the AC filter capacitor or when a battery is used as the input.

4.2 Output Capacitor

Typical PNP-based regulators require an output capacitor to prevent oscillation. The MIC5213 is ultra-stable, requiring only 0.47 µF of output capacitance for stability. The regulator is stable with all types of capacitors, including the tiny, low-ESR ceramic chip capacitors. The output capacitor value can be increased without limit to improve transient response.

4.3 No-Load Stability

The MIC5213 will remain stable and in regulation with no load (other than the internal voltage divider) unlike many other voltage regulators. This is especially important in CMOS RAM keep-alive applications.

4.4 Enable Input

The MIC5213 features nearly zero off-mode current. When EN (enable input) is held below 0.6V, all internal circuitry is powered off. Pulling EN high (over 2.0V) re-enables the device and allows operation. When EN is held low, the regulator typically draws only 10 nA of current. While the logic threshold is TTL/CMOS compatible, EN may be pulled as high as 20V, independent of V_{IN}.

4.5 Thermal Behavior

The MIC5213 is designed to provide 80 mA of continuous current in a very small profile package. Maximum power dissipation can be calculated based on the output current and the voltage drop across the part. To determine the maximum power dissipation of the package, use the junction-to-ambient thermal resistance of the device and the following basic equation:

EQUATION 4-1:

$$P_{D(MAX)} = \frac{T_{J(MAX)} - T_A}{\theta_{JA}}$$

Where:

$T_{J(MAX)}$ is 125°C, the maximum junction temperature of the die.

T_A is the maximum ambient temperature.

θ_{JA} is the junction to ambient thermal resistance of the regulator (450°C/W).

The actual power dissipation of the regulator circuit can be determined using one simple equation.

EQUATION 4-2:

$$P_D = (V_{IN} - V_{OUT}) \times I_{OUT} + V_{IN} \times I_{GND}$$

Substituting $P_{D(MAX)}$, determined above, for P_D and solving for the operating conditions that are critical to the application will give the maximum operating conditions for the regulator circuit. For example, if we are operating the MIC5213-3.0YC5 at room temperature, with a minimum footprint layout, we can determine the maximum input voltage for a set output current.

EQUATION 4-3:

$$P_{D(MAX)} = \frac{125 - 25}{450°C/W}$$

$$P_{D(MAX)} = 222mW$$

To prevent the device from entering thermal shutdown, maximum power dissipation cannot be exceeded. Using the output voltage of 3.0V, and an output current of 80 mA, we can determine the maximum input voltage. Ground current, maximum of 3 mA for 80 mA of output current, can be taken from the Electrical Characteristics table.

EQUATION 4-4:

$$222mW = (V_{IN} - 3.0V) \times 80mA + V_{IN} \times 3mA$$

$$222mW = (80mA \times V_{IN} + 3mA \times V_{IN}) - 240mW$$

$$462mW = 83mA \times V_{IN}$$

$$V_{IN} = 5.57V \text{ max.}$$

Therefore, a 3.0V application at 80mA of output current can accept a maximum input voltage of 5.6V in an SC-70-5 package. For a full discussion of heat sinking and thermal effects on voltage regulators, refer to Regulator Thermals section of Microchip's Designing with Low-Dropout Voltage Regulators handbook.

© 2023 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

4.6 Fixed Voltage Regulator

The MIC5213 is ideal for general-purpose voltage regulation in any handheld device. Applications that are tight for space can easily use the SC-70 regulator which occupies half the space of a SOT-23-5 regulator. The MIC5203 offers a smaller system solution, only requiring a small multilayer ceramic capacitor for stability.

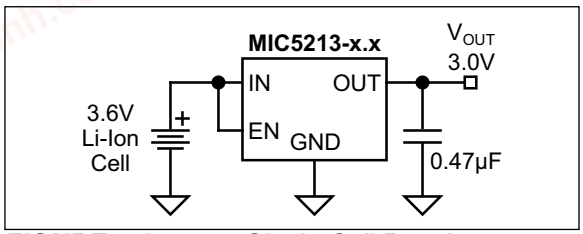



FIGURE 4-1: *Single-Cell Regulator.*

chanhvinh.com


5.0 PACKAGING INFORMATION

5.1 Package Marking Information

5-Lead SC-70* (Front)




Example



5-Lead SC-70* (Back)



Example



Legend:	XX...X	Product code or customer-specific information
	Y	Year code (last digit of calendar year)
	YY	Year code (last 2 digits of calendar year)
	WW	Week code (week of January 1 is week ‘01’)
	NNN	Alphanumeric traceability code
	(e3)	Pb-free JEDEC® designator for Matte Tin (Sn)
	*	This package is Pb-free. The Pb-free JEDEC designator ((e3)) can be found on the outer packaging for this package.
	●, ▲, ▼	Pin one index is identified by a dot, delta up, or delta down (triangle mark).
Note:	In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. Package may or may not include the corporate logo.	
	Underbar (_) and/or Overbar (¯) symbol may not be to scale.	


Note: If the full seven-character YYWWNNN code cannot fit on the package, the following truncated codes are used based on the available marking space:
6 Characters = YWWNNN; 5 Characters = WWNNN; 4 Characters = WNNN; 3 Characters = NNN;
2 Characters = NN; 1 Character = N

© 2023 Microchip Technology Inc. and its subsidiaries


chanhvinh.com

TITLE
5 LEAD SC70 PACKAGE OUTLINE & RECOMMENDED LAND PATTERN


DRAWING #	SC70-5LD-PL-1	UNIT	MM

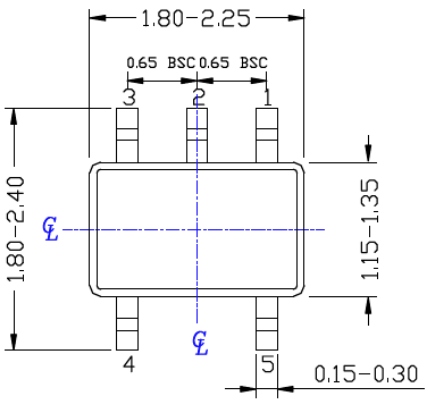


TOP VIEW

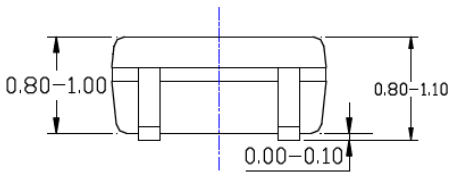

SIDE VIEW

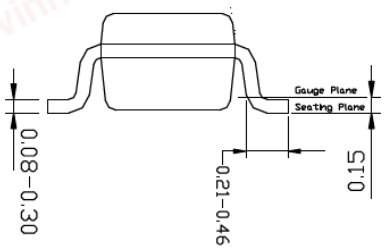

END VIEW

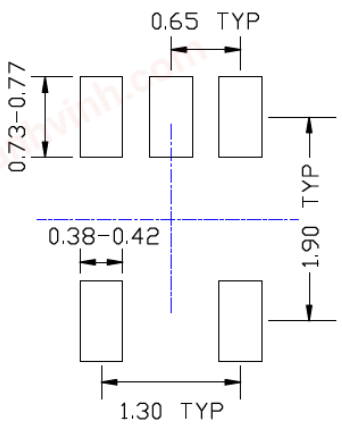

RECOMMENDED LAND PATTERN

NOTE:
1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. DIMENSIONS ARE INCLUSIVE OF PLATING.
3. DIMENSIONS ARE EXCLUSIVE OF MOLD FLASH & METAL BURR.

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging.

© 2023 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

NOTES:

chanhvinh.com

© 2023 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

APPENDIX A: REVISION HISTORY

Revision A (August 2023)

- Converted Micrel document MIC5213 to Microchip data sheet DS20006805A.
- Minor text changes throughout.

chanhvinh.com

chanhvinh.com

NOTES:

chanhvinh.com

© 2023 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, contact your local Microchip representative or sales office.

Part Number	-X.X	X	XX	-XX
Device	Output Voltage	Temperature Range	Package	Media Type

Device:	MIC5213:		SC-70 µCap Low Dropout Regulator
Output Voltage:	2.5	=	2.5V
	2.6	=	2.6V
	2.7	=	2.7V
	2.8	=	2.8V
	3.0	=	3.0V
	3.3	=	3.3V
	3.6	=	3.6V
	5.0	=	5.0V
Temperature Range:	Y	=	–40°C to +125°C
Package:	C5	=	5-Lead SC-70
Media Type:	TR	=	3,000/Reel

Examples:

a) MIC5213-2.5YC5-TR:	MIC5213, 2.5V Output Voltage, –40°C to +125°C Temp. Range, 5-Lead SC-70, 3,000/Reel
b) MIC5213-2.6YC5-TR:	MIC5213, 2.6V Output Voltage, –40°C to +125°C Temp. Range, 5-Lead SC-70, 3,000/Reel
c) MIC5213-2.7YC5-TR:	MIC5213, 2.7V Output Voltage, –40°C to +125°C Temp. Range, 5-Lead SC-70, 3,000/Reel
d) MIC5213-2.8YC5-TR:	MIC5213, 2.8V Output Voltage, –40°C to +125°C Temp. Range, 5-Lead SC-70, 3,000/Reel
e) MIC5213-3.0YC5-TR:	MIC5213, 3.0V Output Voltage, –40°C to +125°C Temp. Range, 5-Lead SC-70, 3,000/Reel
f) MIC5213-3.3YC5-TR:	MIC5213, 3.3V Output Voltage, –40°C to +125°C Temp. Range, 5-Lead SC-70, 3,000/Reel
g) MIC5213-3.6YC5-TR:	MIC5213, 3.6V Output Voltage, –40°C to +125°C Temp. Range, 5-Lead SC-70, 3,000/Reel
h) MIC5213-5.0YC5-TR:	MIC5213, 5.0V Output Voltage, –40°C to +125°C Temp. Range, 5-Lead SC-70, 3,000/Reel

Note: Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.

© 2023 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

NOTES:

chanhvinh.com

© 2023 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable" Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at https://www.microchip.com/en-us/support/design-help/client-support-services.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet- Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, TrueTime, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, Clockstudio, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, GridTime, IdealBridge, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, IntelliMOS, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, KoD, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQI, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, Trusted Time, TSHARC, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2023, Microchip Technology Incorporated and its subsidiaries.

All Rights Reserved.

ISBN: 978-1-6683-3025-8

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.

chanhvinh.com

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
http://www.microchip.com/support
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

Raleigh, NC
Tel: 919-844-7510

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110
Tel: 408-436-4270

Canada - Toronto
Tel: 905-695-1980
Fax: 905-695-2078

ASIA/PACIFIC

Australia - Sydney
Tel: 61-2-9868-6733

China - Beijing
Tel: 86-10-8569-7000

China - Chengdu
Tel: 86-28-8665-5511

China - Chongqing
Tel: 86-23-8980-9588

China - Dongguan
Tel: 86-769-8702-9880

China - Guangzhou
Tel: 86-20-8755-8029

China - Hangzhou
Tel: 86-571-8792-8115

China - Hong Kong SAR
Tel: 852-2943-5100

China - Nanjing
Tel: 86-25-8473-2460

China - Qingdao
Tel: 86-532-8502-7355

China - Shanghai
Tel: 86-21-3326-8000

China - Shenyang
Tel: 86-24-2334-2829

China - Shenzhen
Tel: 86-755-8864-2200

China - Suzhou
Tel: 86-186-6233-1526

China - Wuhan
Tel: 86-27-5980-5300

China - Xian
Tel: 86-29-8833-7252

China - Xiamen
Tel: 86-592-2388138

China - Zhuhai
Tel: 86-756-3210040

ASIA/PACIFIC

India - Bangalore
Tel: 91-80-3090-4444

India - New Delhi
Tel: 91-11-4160-8631

India - Pune
Tel: 91-20-4121-0141

Japan - Osaka
Tel: 81-6-6152-7160

Japan - Tokyo
Tel: 81-3-6880- 3770

Korea - Daegu
Tel: 82-53-744-4301

Korea - Seoul
Tel: 82-2-554-7200

Malaysia - Kuala Lumpur
Tel: 60-3-7651-7906

Malaysia - Penang
Tel: 60-4-227-8870

Philippines - Manila
Tel: 63-2-634-9065

Singapore
Tel: 65-6334-8870

Taiwan - Hsin Chu
Tel: 886-3-577-8366

Taiwan - Kaohsiung
Tel: 886-7-213-7830

Taiwan - Taipei
Tel: 886-2-2508-8600

Thailand - Bangkok
Tel: 66-2-694-1351

Vietnam - Ho Chi Minh
Tel: 84-28-5448-2100

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4485-5910
Fax: 45-4485-2829

Finland - Espoo
Tel: 358-9-4520-820

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Garching
Tel: 49-8931-9700

Germany - Haan
Tel: 49-2129-3766400

Germany - Heilbronn
Tel: 49-7131-72400

Germany - Karlsruhe
Tel: 49-721-625370

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Rosenheim
Tel: 49-8031-354-560

Israel - Ra'anana
Tel: 972-9-744-7705

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Padova
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Norway - Trondheim
Tel: 47-7288-4388

Poland - Warsaw
Tel: 48-22-3325737

Romania - Bucharest
Tel: 40-21-407-87-50

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Gothenberg
Tel: 46-31-704-60-40

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820

© 2023 Microchip Technology Inc. and its subsidiaries