chanhvinh.com

# MIC5317

## High Performance Single 150 mA LDO

### Features

- Tiny 1 mm x 1 mm UDFN, SOT23-5, and TSOT23-5 Packages
- Wide 2.5V to 6V Operating Range
- 150 mA Output Current
- Stable with 1 µF Ceramic Output Capacitors
- Low Dropout Voltage: 155 mV @ 150 mA
- Excellent Load/Line Transient Response
- Low Quiescent Current: 29 µA
- High PSRR: 70 dB
- Thermal-Shutdown and Current-Limit Protection

### Applications

- USB Dongles
- Wireless LANs
- PC Desktops, Laptops, and Tablets
- Battery-Powered Equipment
- Digital Still and Video Cameras
- 5V General Purpose

### General Description

The MIC5317 is a high performance 150 mA low dropout regulator that offers high power supply rejection (PSRR) in an ultra-small 1 mm x 1 mm package for stringent space requirements and demanding performance. The MIC5317 operates from an input voltage from 2.5V to 6.0V and is capable of providing the output voltages of 1.0V to 3.6V making it ideal for USB port or 6V AC adapter applications.


The MIC5317 offers 2% initial accuracy, low dropout voltage (155 mV @ 150 mA), and low ground current (typically 29 µA). The MIC5317 can also be put into a zero off-mode current state, drawing virtually no current when disabled.

The MIC5317 is available in several advanced packages including a lead-free (RoHS-compliant) 1 mm x 1 mm UDFN that occupies only 1 $mm^2$ of PCB area, a 75% reduction in board area compared to SC-70 and 2 mm x 2 mm DFN packages. It is also available in a SOT23-5 and TSOT23-5 package.


The MIC5317 has an operating junction temperature range of –40°C to 125°C.

### Package Types

**MIC5317**
4-Lead 1 mm x 1 mm UDFN (MT)
(Top View)




**MIC5317**
5-Lead SOT-23 (M5)/TSOT-23 (D5)
(Top View)





© 2019 Microchip Technology Inc.


chanhvinh.com



## Typical Application Circuit

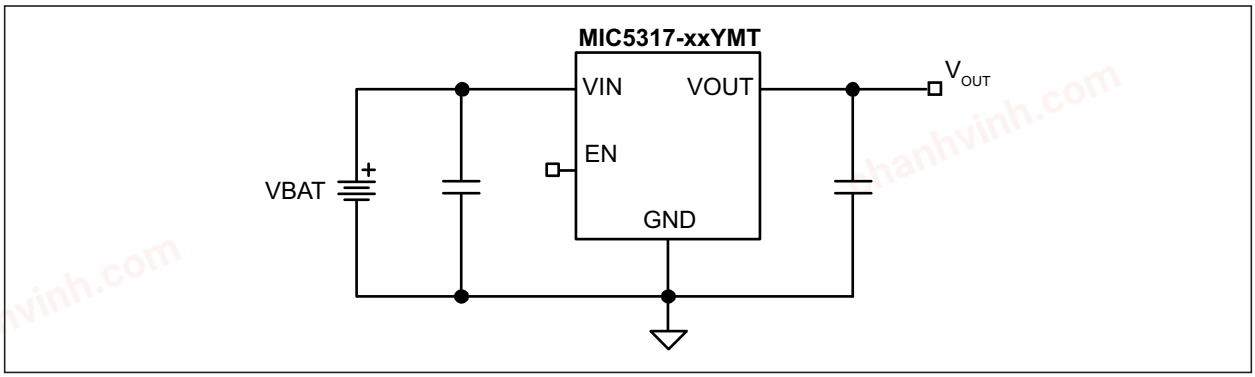


## Functional Block Diagram

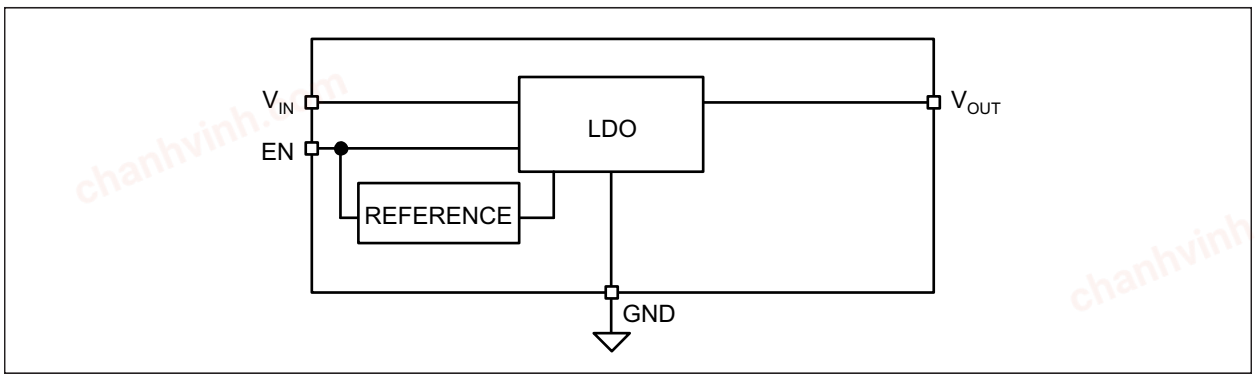



© 2019 Microchip Technology Inc.

chanhvinh.com



## 1.0 ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings †

Supply Voltage ($V_{IN}$) ..... 0V to +7V
Enable Voltage ($V_{EN}$) ..... 0V to $V_{IN}$
Power Dissipation ($P_D$) ..... Internally Limited (Note 1)
ESD Rating (HBM, Note 2) ..... 2 kV

### Operating Ratings ††

Supply Voltage ($V_{IN}$) ..... +2.5V to +6V
Enable Voltage ($V_{EN}$) ..... 0V to $V_{IN}$

**† Notice:** Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational sections of this specification is not intended. Exposure to maximum rating conditions for extended periods may affect device reliability.

**†† Notice:** The device is not guaranteed to function outside its operating ratings.

**Note 1:** The maximum allowable power dissipation of any $T_A$ (ambient temperature) is $P_{D(MAX)} = (T_{J(MAX)} - T_A)/\theta_{JA}$. Exceeding the maximum allowable power dissipation will result in excessive die temperature and the regulator will go into thermal shutdown.

**2:** Devices are ESD sensitive. Handling precautions are recommended. Human body model, 1.5 kΩ in series with 100 pF.

chanhvinh.com

chanhvinh.com



## ELECTRICAL CHARACTERISTICS

**Electrical Characteristics:** $V_{IN} = V_{EN} = V_{OUT} + 1V$; $C_{IN} = C_{OUT} = 1\ \mu F$; $I_{OUT} = 100\ \mu A$; $T_J = +25°C$, **bold** values valid for –40°C to +125°C, unless noted. Note 1

| Parameter | Sym. | Min. | Typ. | Max. | Units | Conditions |
|---|---|---|---|---|---|---|
| Output Voltage Accuracy | | –2.0 | — | 2.0 | % | Variation from nominal $V_{OUT}$ |
| | | **–3.0** | — | **3.0** | | Variation from nominal $V_{OUT}$: –40°C to +125°C |
| Line Regulation | | — | 0.02 | **0.3** | % | $V_{IN} = V_{OUT}$ +1V to 6V; $I_{OUT} = 100\ \mu A$ |
| Load Regulation (Note 2) | | — | 10 | 25 | mV | $I_{OUT} = 100\ \mu A$ to 150 mA |
| Dropout Voltage (Note 3) | $V_{DO}$ | — | 55 | **110** | mV | $I_{OUT} = 50$ mA; $V_{OUT} \geq 2.8V$ |
| | | — | 155 | **310** | | $I_{OUT} = 150$ mA; $V_{OUT} \geq 2.8V$ |
| | | — | 60 | **135** | | $I_{OUT} = 50$ mA; $V_{OUT} < 2.8V$ |
| | | — | 180 | **380** | | $I_{OUT} = 150$ mA; $V_{OUT} < 2.8V$ |
| Ground Pin Current (Note 4) | $I_{GND}$ | — | 29 | **39** | µA | $I_{OUT} = 0$ mA |
| Ground Pin Current in Shutdown | $I_{SHDN}$ | — | 0.05 | 1 | µA | $V_{EN} = 0V$ |
| Ripple Rejection | PSRR | — | 80 | — | dB | f = Up to 1 kHz; $C_{OUT} = 1\ \mu F$ |
| | | — | 65 | — | | f = 1 kHz to 10 kHz; $C_{OUT} = 1\ \mu F$ |
| Current Limit | $I_{LIM}$ | 200 | 325 | 550 | mA | $V_{OUT} = 0V$ |
| Output Voltage Noise | $e_N$ | — | 200 | — | $\mu V_{RMS}$ | $C_{OUT} = 1\ \mu F$, 10 Hz to 100 kHz |
| **Enable Input** | | | | | | |
| Enable Input Voltage | $V_{EN}$ | — | — | **0.2** | V | Logic low |
| | | **1.2** | — | — | | Logic high |
| Enable Input Current | $I_{EN}$ | — | 0.01 | **1** | µA | $V_{IL} \leq 0.2V$ |
| | | — | 0.01 | **1** | | $V_{IH} \geq 1.2V$ |
| Turn-On Time | $t_{ON}$ | — | 50 | **125** | µs | $C_{OUT} = 1\ \mu F$; $I_{OUT} = 150$ mA |

**Note 1:** Specification for packaged product only.

**2:** Regulation is measured at constant junction temperature using low duty cycle pulse testing; changes in output voltage due to heating effects are covered by the thermal regulation specification.

**3:** Dropout voltage is defined as the input-to-output differential at which the output voltage drops 2% below its nominal value measured at 1V differential. For outputs below 2.5V, dropout voltage is the input-to-output differential with the minimum input voltage 2.5V.

**4:** Ground pin current is the regulator quiescent current. The total current drawn from the supply is the sum of the load current plus the ground pin current.


© 2019 Microchip Technology Inc.

chanhvinh.com



## TEMPERATURE SPECIFICATIONS

| Parameters | Sym. | Min. | Typ. | Max. | Units | Conditions |
|---|---|---|---|---|---|---|
| **Temperature Ranges** | | | | | | |
| Max. Junction Temperature Range | $T_J$ | –40 | — | +150 | °C | — |
| Operating Junction Temperature Range | $T_J$ | –40 | — | +125 | °C | — |
| Storage Temperature Range | $T_S$ | –65 | — | +150 | °C | — |
| Lead Temperature | — | — | — | +260 | °C | Soldering, 10 sec. |
| **Package Thermal Resistances** | | | | | | |
| Thermal Resistance, 1x1 4-Ld UDFN | $\theta_{JA}$ | — | 240 | — | °C/W | — |
| Thermal Resistance, SOT23-5 | $\theta_{JA}$ | — | 253 | — | °C/W | — |
| Thermal Resistance, TSOT23-5 | $\theta_{JA}$ | — | 253 | — | °C/W | — |

**Note 1:** The maximum allowable power dissipation is a function of ambient temperature, the maximum allowable junction temperature and the thermal resistance from junction to air (i.e., $T_A$, $T_J$, $\theta_{JA}$). Exceeding the maximum allowable power dissipation will cause the device operating junction temperature to exceed the maximum +125°C rating. Sustained junction temperatures above +125°C can impact the device reliability.

chanhvinh.com

chanhvinh.com



## 2.0 TYPICAL PERFORMANCE CURVES

**Note:** The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

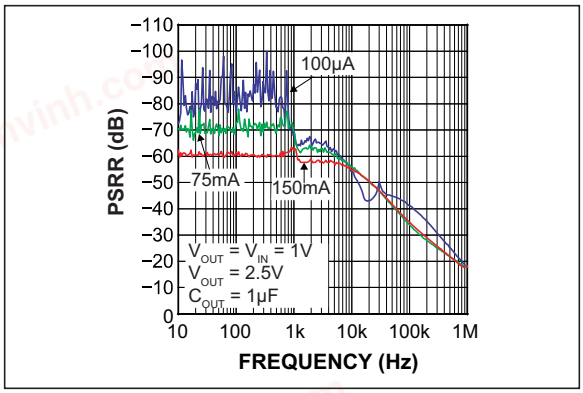



***FIGURE 2-1:*** *Power Supply Rejection Ratio.*

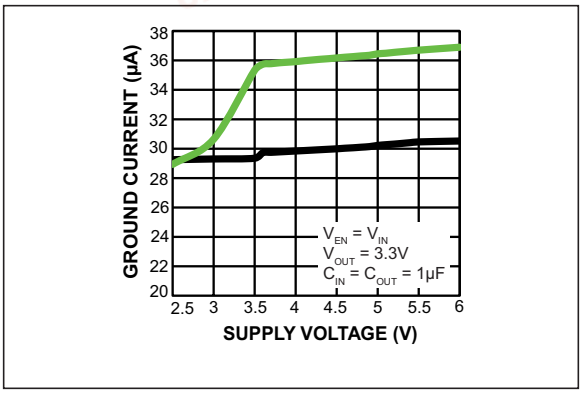



***FIGURE 2-4:*** *Ground Current vs. Supply Voltage.*

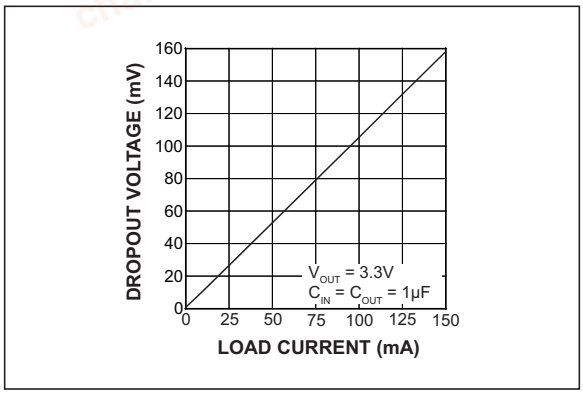



***FIGURE 2-2:*** *Dropout Voltage vs. Load Current.*

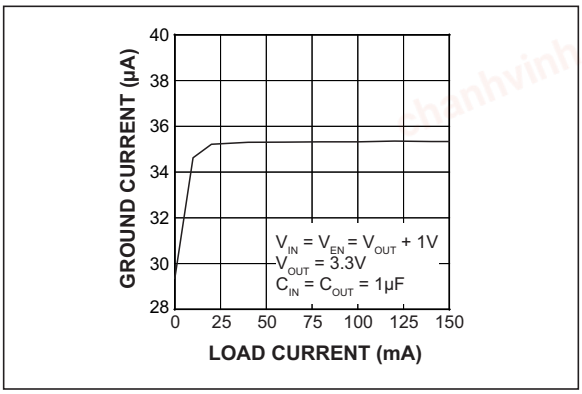



***FIGURE 2-5:*** *Ground Current vs. Load Current.*

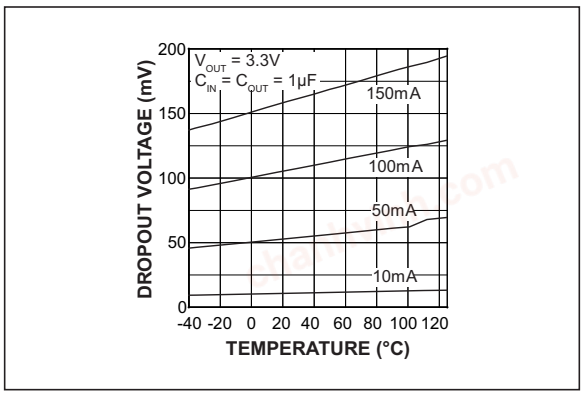



***FIGURE 2-3:*** *Dropout Voltage vs. Temperature.*

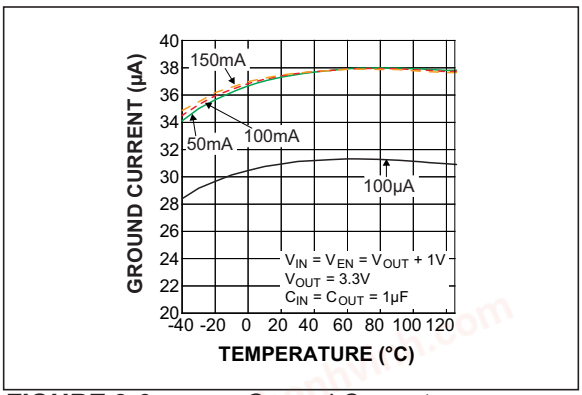



***FIGURE 2-6:*** *Ground Current vs. Temperature.*


© 2019 Microchip Technology Inc.

chanhvinh.com



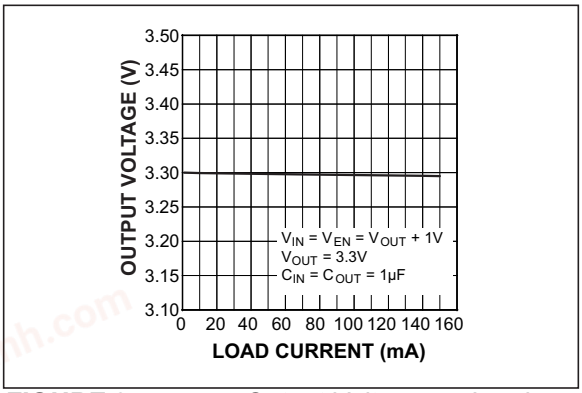



***FIGURE 2-7:*** *Output Voltage vs. Load Current.*

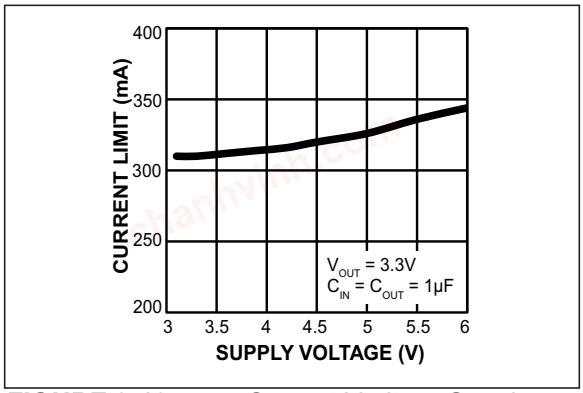



***FIGURE 2-10:*** *Current Limit vs. Supply Voltage.*

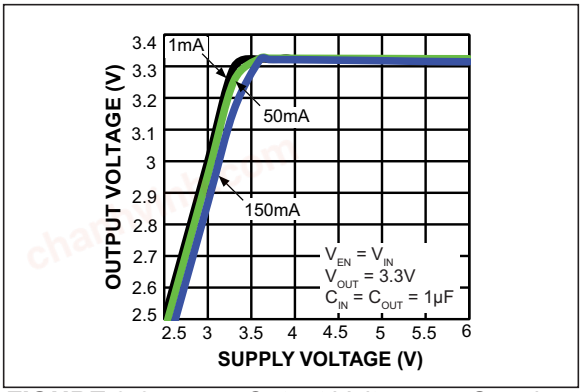



***FIGURE 2-8:*** *Output Voltage vs. Supply Voltage.*

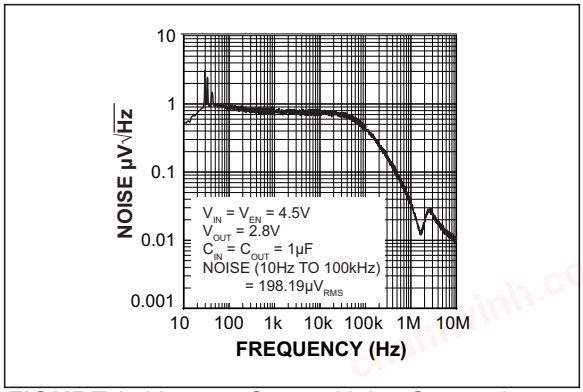



***FIGURE 2-11:*** *Output Noise Spectral Density.*

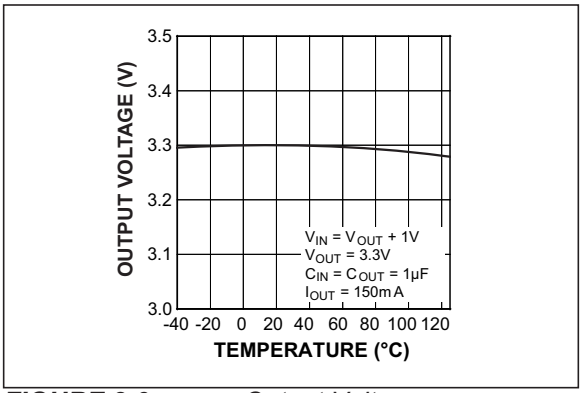



***FIGURE 2-9:*** *Output Voltage vs. Temperature.*

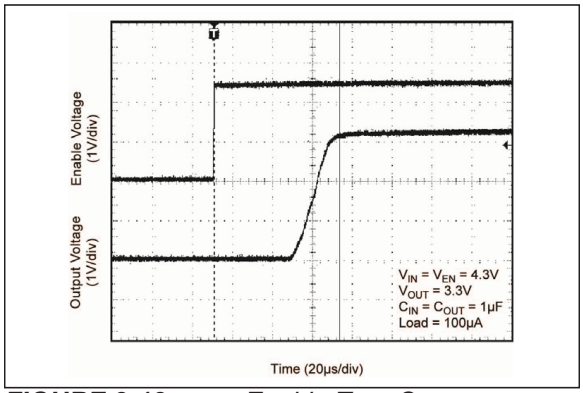



***FIGURE 2-12:*** *Enable Turn-On.*

chanhvinh.com



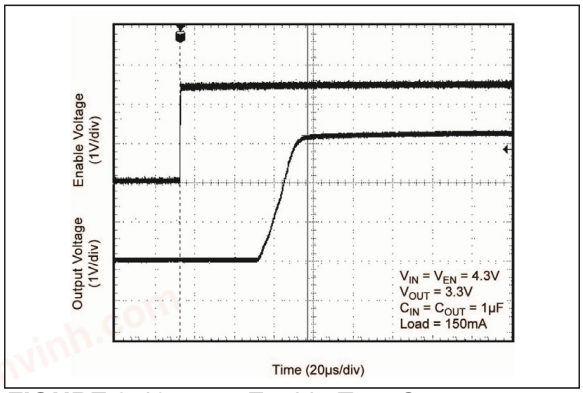



***FIGURE 2-13:*** *Enable Turn-On.*

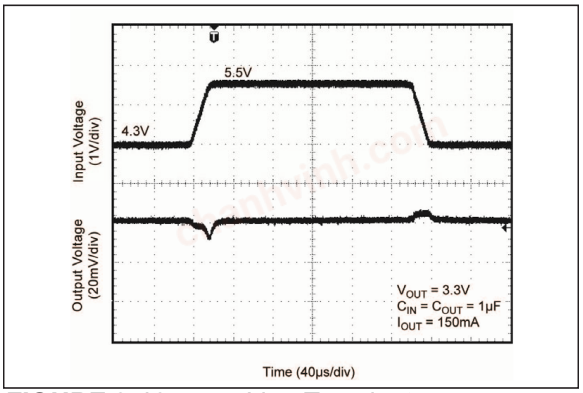



***FIGURE 2-16:*** *Line Transient.*

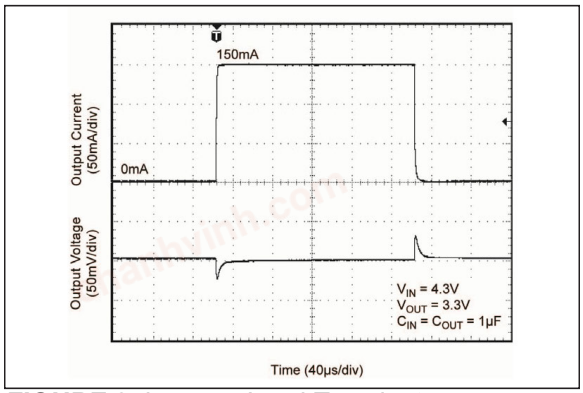



***FIGURE 2-14:*** *Load Transient.*

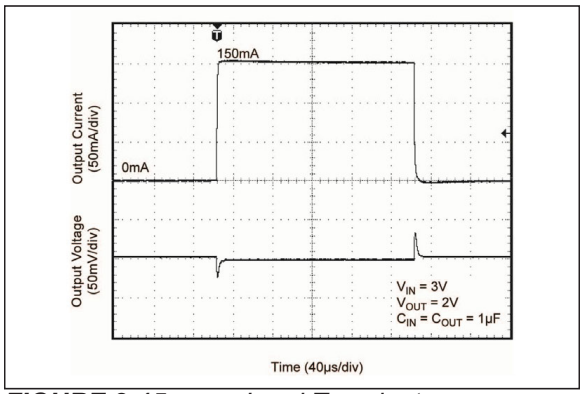



***FIGURE 2-15:*** *Load Transient.*


© 2019 Microchip Technology Inc.

chanhvinh.com



## 3.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in Table 3-1.

**TABLE 3-1: PIN FUNCTION TABLE**

| Pin Number | Pin Name UDFN-4 | Pin Name SOT23-5 | Pin Name TSOT23-5 | Description |
|---|---|---|---|---|
| 1 | VOUT | — | — | Output voltage. |
| 1 | — | VIN | VIN | Supply input. |
| 2 | GND | GND | GND | Ground. |
| 3 | EN | EN | EN | Enable Input: Active-High. High = ON; Low = OFF. Do not leave floating. |
| 4 | VIN | — | — | Supply input. |
| 4 | — | NC | NC | No connect. Not internally connected. |
| 5 | — | VOUT | VOUT | Output voltage. |
| EP | ePAD | N/A | N/A | Exposed heat sink pad. Connect to ground. |

chanhvinh.com

chanhvinh.com



## 4.0 APPLICATION INFORMATION

MIC5317 is a low-noise 150 mA LDO. The MIC5317 regulator is fully protected from damage due to fault conditions, offering linear current limiting and thermal shutdown. The MIC5317 is not suitable for RF transmitter systems.

### 4.1 Input Capacitor

The MIC5317 is a high-performance, high-bandwidth device. An input capacitor of 1 µF is required from the input to ground to provide stability. Low-ESR ceramic capacitors provide optimal performance at a minimum of space. Additional high-frequency capacitors, such as small-valued NPO dielectric-type capacitors, help filter out high-frequency noise and are good practice in any RF-based circuit. X5R or X7R dielectrics are recommended for the input capacitor. Y5V dielectrics lose most of their capacitance over temperature and are therefore, not recommended.

### 4.2 Output Capacitor

The MIC5317 requires an output capacitor of 1 µF or greater to maintain stability. The design is optimized for use with low-ESR ceramic chip capacitors. High-ESR capacitors are not recommended because they may cause high-frequency oscillation. The output capacitor can be increased, but performance has been optimized for a 1 µF ceramic output capacitor and does not improve significantly with larger capacitance.

X7R/X5R dielectric-type ceramic capacitors are recommended because of their temperature performance. X7R-type capacitors change capacitance by 15% over their operating temperature range and are the most stable type of ceramic capacitors. Z5U and Y5V dielectric capacitors change value by as much as 50% and 60%, respectively, over their operating temperature ranges. To use a ceramic-chip capacitor with Y5V dielectric, the value must be much higher than an X7R ceramic capacitor to ensure the same minimum capacitance over the equivalent operating temperature range.

### 4.3 No-Load Stability

Unlike many other voltage regulators, the MIC5317 will remain stable and in regulation with no load. This is especially important in CMOS RAM keep-alive applications.

### 4.4 Enable/Shutdown

The MIC5317 comes with an active-high enable pin that allows the regulator to be disabled. Forcing the enable pin low disables the regulator and sends it into a “zero” off-mode current state. In this state, current consumed by the regulator goes nearly to zero. Forcing the enable pin high enables the output voltage. The active-high enable pin uses CMOS technology and the enable pin cannot be left floating. A floating enable pin may cause an indeterminate state on the output.

### 4.5 Thermal Considerations

The MIC5317 is designed to provide 150 mA of continuous current in a very small package. Maximum ambient operating temperature can be calculated based on the output current and the voltage drop across the part. For example if the input voltage is 3.6V, the output voltage is 2.8V, and the output current = 150 mA. The actual power dissipation of the regulator circuit can be determined using Equation 4-1.

**EQUATION 4-1:**

$$P_D = (V_{IN} - V_{OUT1}) \times I_{OUT} + V_{IN} \times I_{GND}$$

Because this device is CMOS and the ground current is typically <100 µA over the load range, the power dissipation contributed by the ground current is <1% and can be ignored for Equation 4-2.

**EQUATION 4-2:**

$$P_D = (3.6V - 2.8V) \times 150mA = 0.120W$$

To determine the maximum ambient operating temperature of the package, use the junction-to-ambient thermal resistance of the device and Equation 4-3.

**EQUATION 4-3:**

$$P_{D(MAX)} = \left(\frac{T_{J(MAX)} - T_A}{\theta_{JA}}\right)$$

$T_{J(MAX)}$ = 125°C, the maximum junction temperature of the die, $\theta_{JA}$ thermal resistance = 240°C/W for the YMT package and 253°C/W for the SOT23-5 and TSOT23-5 packages.

Substituting $P_D$ for $P_{D(MAX)}$ and solving for the ambient operating temperature will give the maximum operating conditions for the regulator circuit. The junction-to-ambient thermal resistance for the minimum footprint is 240°C/W.


© 2019 Microchip Technology Inc.

chanhvinh.com



The maximum power dissipation must not be exceeded for proper operation.

For example, when operating the MIC5317-2.8YMT at an input voltage of 3.6V and 150 mA load with a minimum footprint layout, the maximum ambient operating temperature ($T_A$) can be determined as shown in Equation 4-4:

**EQUATION 4-4:**

$$0.120W = (125°C - T_A)/(240°C/W)$$

$$T_A = 96°C$$

Therefore the maximum ambient operating temperature of 96°C is allowed in a 1 mm × 1 mm UDFN package. For a full discussion of heat sinking and thermal effects on voltage regulators, refer to the "Regulator Thermals" section of Microchip's Designing with Low-Dropout Voltage Regulators handbook.

© 2019 Microchip Technology Inc.

chanhvinh.com



## 5.0 TYPICAL APPLICATION SCHEMATICS

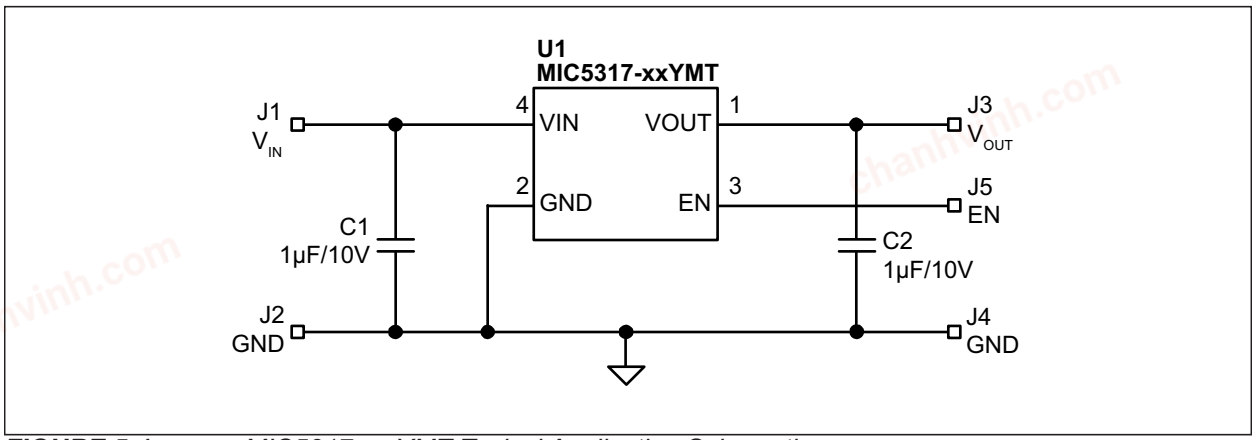



***FIGURE 5-1:*** *MIC5317-x.xYMT Typical Application Schematic.*

**TABLE 5-1: BILL OF MATERIALS**

| Item | Part Number | Manufacturer | Description | Qty. |
|---|---|---|---|---|
| C1, C2 | GRM155R61A105KE15D | Murata | Capacitor, 1 µF Ceramic, 10V, X5R, Size 0402 | 2 |
| **U1** | **MIC5317-x.xYMT** | **Microchip** | **High-Performance Single 150 mA LDO** | **1** |

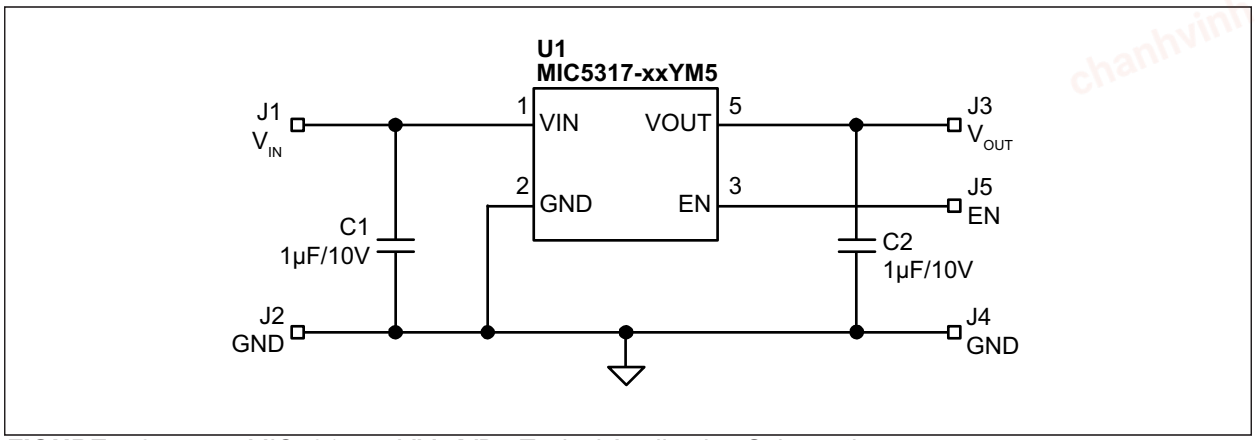



***FIGURE 5-2:*** *MIC5317-x.xYM5/YD5 Typical Application Schematic.*

**TABLE 5-2: BILL OF MATERIALS**

| Item | Part Number | Manufacturer | Description | Qty. |
|---|---|---|---|---|
| C1, C2 | C1005X5R1A105K | TDK | Capacitor, 1 µF Ceramic, 10V, X5R, Size 0402 | 2 |
| **U1** | **MIC5317-x.xYM5/YD5** | **Microchip** | **High-Performance Single 150 mA LDO** | 1 |


© 2019 Microchip Technology Inc.

chanhvinh.com



## 6.0 PCB LAYOUT RECOMMENDATIONS

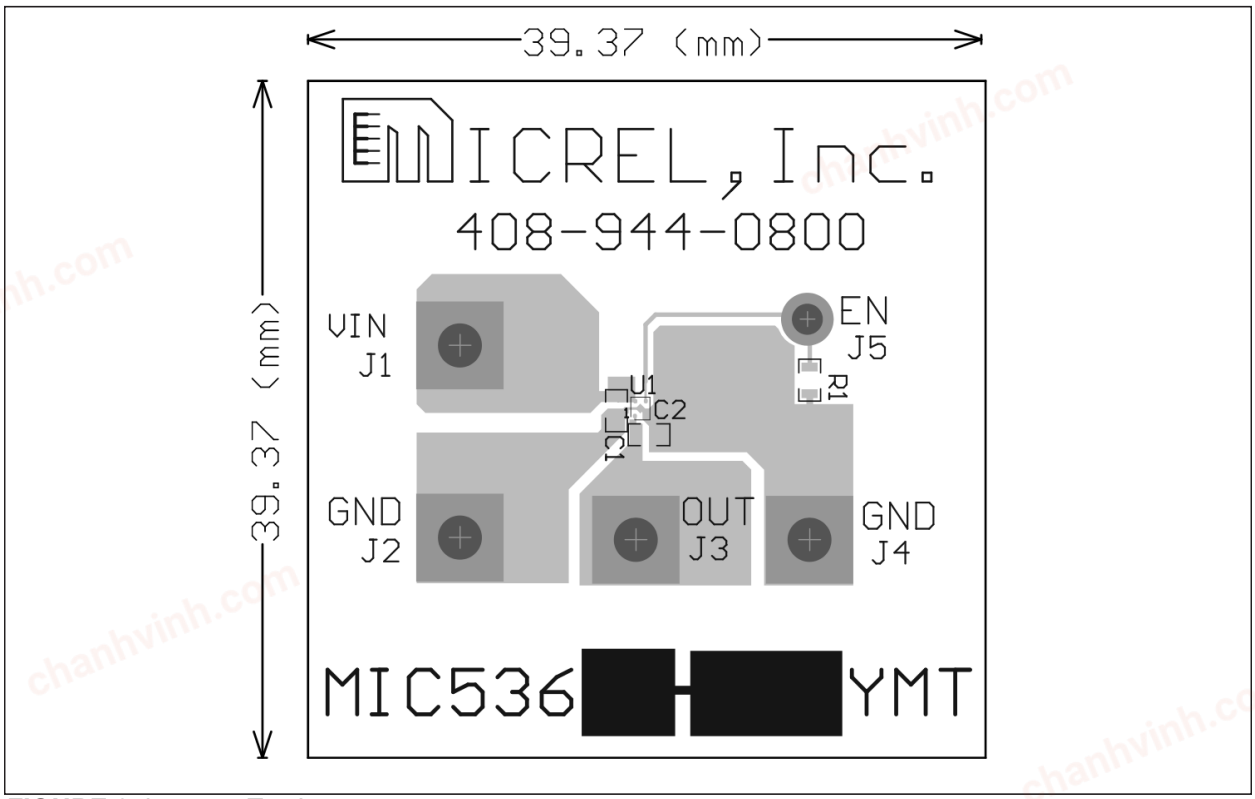



***FIGURE 6-1:*** *Top Layer.*

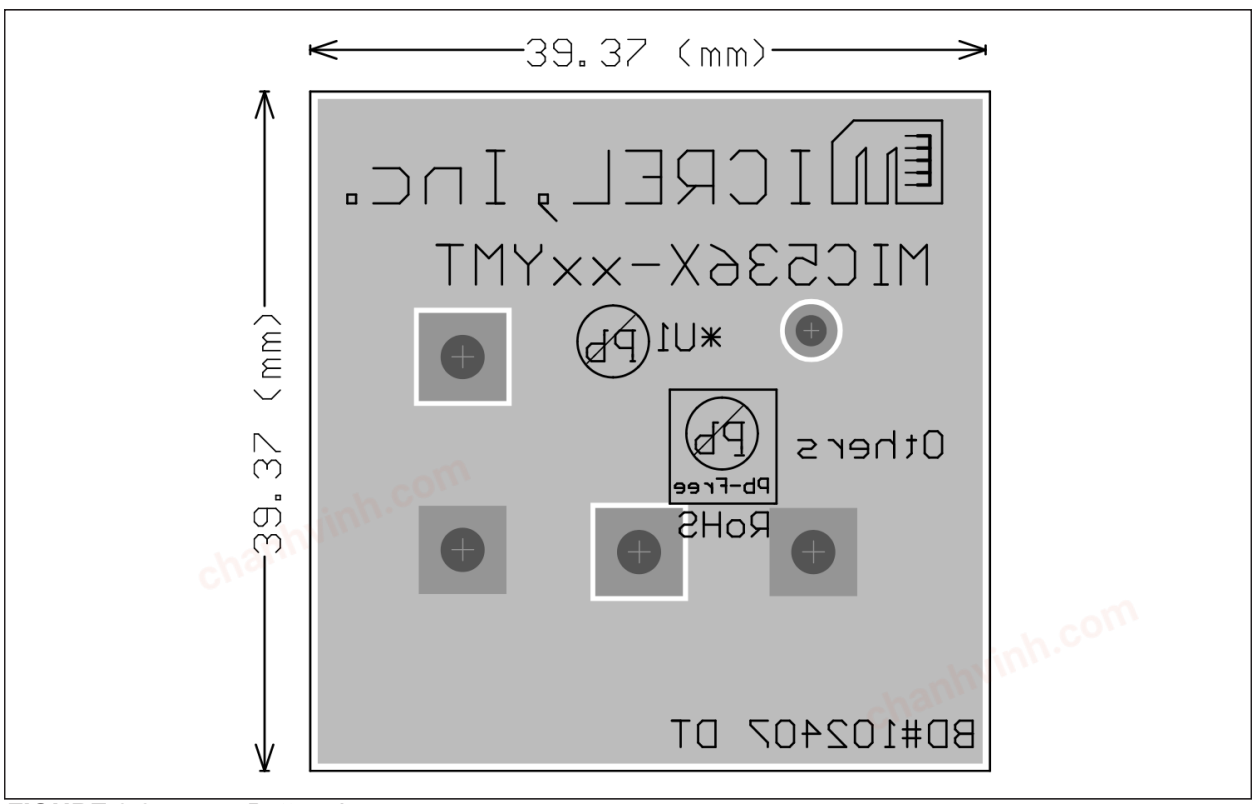



***FIGURE 6-2:*** *Bottom Layer.*


chanhvinh.com




## 7.0 PACKAGING INFORMATION

### 7.1 Package Marking Information


4-Lead UDFN* Example

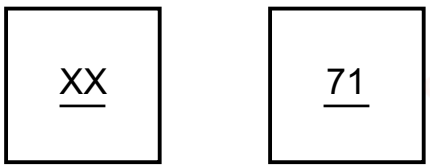


SOT23-5* Example




TSOT23-5* Example




| | | |
|---|---|---|
| **Legend:** | XX...X | Product code or customer-specific information |
| | Y | Year code (last digit of calendar year) |
| | YY | Year code (last 2 digits of calendar year) |
| | WW | Week code (week of January 1 is week '01') |
| | NNN | Alphanumeric traceability code |
| | (e3) | Pb-free JEDEC® designator for Matte Tin (Sn) |
| | * | This package is Pb-free. The Pb-free JEDEC designator ((e3)) can be found on the outer packaging for this package. |
| | ●, ▲, ▼ | Pin one index is identified by a dot, delta up, or delta down (triangle mark). |
| **Note**: | | In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. Package may or may not include the corporate logo. |
| | | Underbar (_) and/or Overbar (¯) symbol may not be to scale. |

**TABLE 7-1: MARKING CODES**

| Part Number | Marking Code | Output Voltage |
|---|---|---|
| MIC5317-1.0YMT | 71 | 1.0V |
| MIC5317-1.2YMT | 72 | 1.2V |
| MIC5317-1.5YMT | 73 | 1.5V |
| MIC5317-1.8YMT | 74 | 1.8V |
| MIC5317-2.5YMT | 76 | 2.5V |
| MIC5317-2.8YMT | 77 | 2.8V |
| MIC5317-3.0YMT | 78 | 3.0V |


© 2019 Microchip Technology Inc.

chanhvinh.com



**TABLE 7-1: MARKING CODES (CONTINUED)**

| Part Number | Marking Code | Output Voltage |
|---|---|---|
| MIC5317-3.3YMT | 79 | 3.3V |
| MIC5317-1.0YM5 | 1C7 | 1.0V |
| MIC5317-1.2YM5 | 147 | 1.2V |
| MIC5317-1.5YM5 | 1F7 | 1.5V |
| MIC5317-1.8YM5 | 1G7 | 1.8V |
| MIC5317-2.5YM5 | 1J7 | 2.5V |
| MIC5317-2.8YM5 | 1M7 | 2.8V |
| MIC5317-3.0YM5 | 1P7 | 3.0V |
| MIC5317-3.3YM5 | 1S7 | 3.3V |
| MIC5317-1.0YD5 | 1C7 | 1.0V |
| MIC5317-1.2YD5 | 147 | 1.2V |
| MIC5317-1.5YD5 | 1F7 | 1.5V |
| MIC5317-1.8YD5 | 1G7 | 1.8V |
| MIC5317-2.5YD5 | 1J7 | 2.5V |
| MIC5317-2.8YD5 | 1M7 | 2.8V |
| MIC5317-3.0YD5 | 1P7 | 3.0V |
| MIC5317-3.3YD5 | 1S7 | 3.3V |

chanhvinh.com


chanhvinh.com



## 4-Lead 1 mm x 1 mm UDFN Package Outline & Recommended Land Pattern

### 4-Lead Ultra Thin Plastic Dual Flat, No Lead Package (HCA) - 1x1 mm Body [UDFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

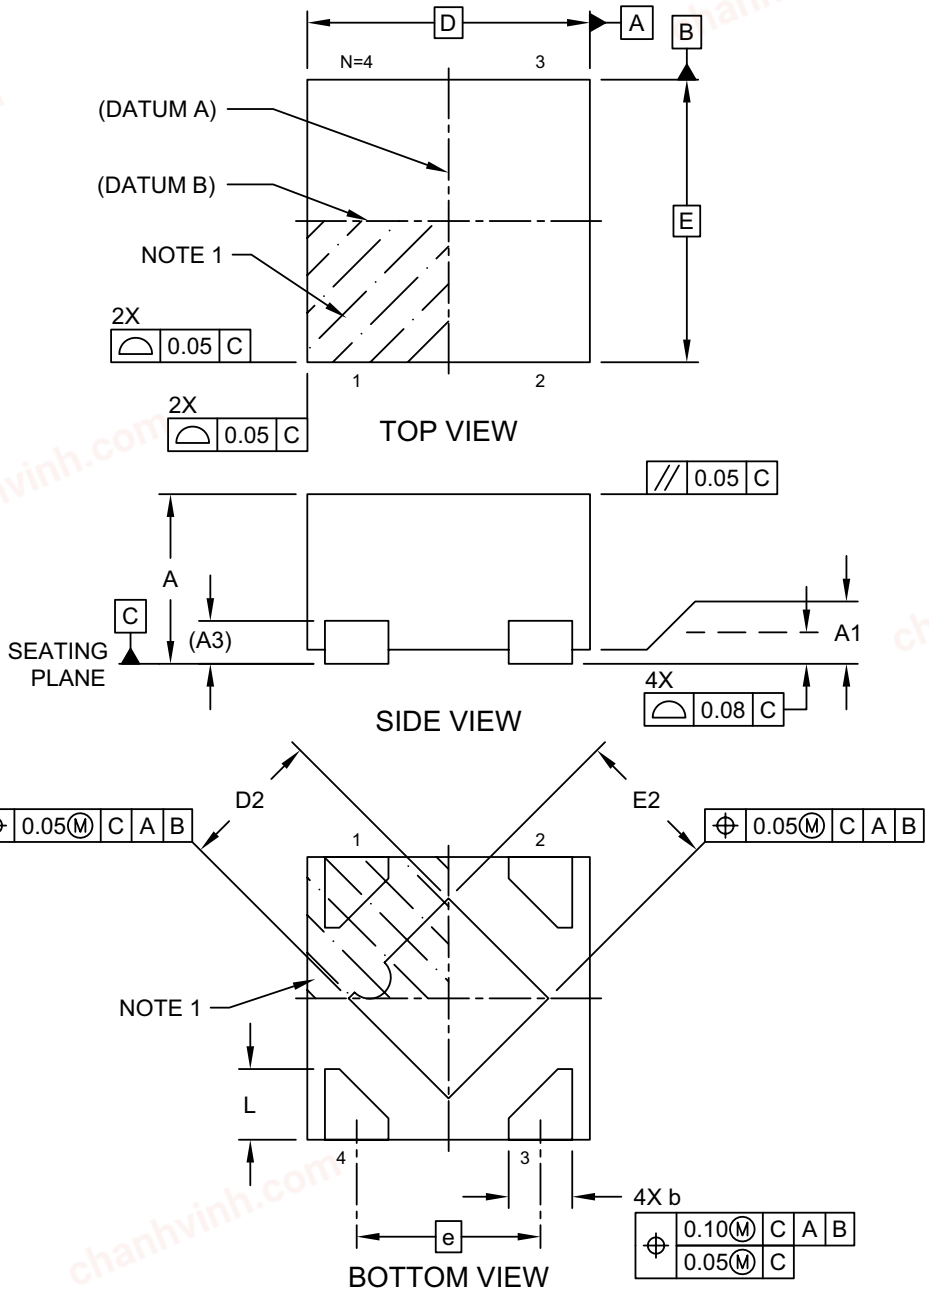


Microchip Technology Drawing C04-1149 Rev A Sheet 1 of 2



© 2019 Microchip Technology Inc.

chanhvinh.com



## 4-Lead Ultra Thin Plastic Dual Flat, No Lead Package (HCA) - 1x1 mm Body [UDFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

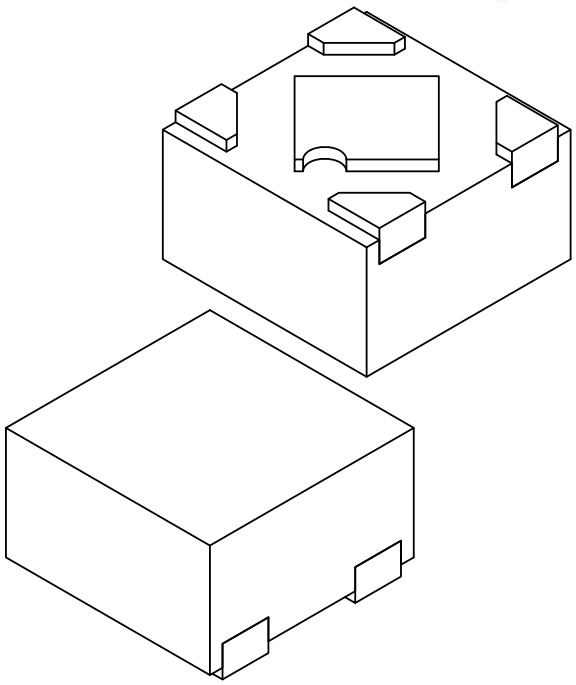

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Number of Terminals | N | | 4 | |
| Pitch | e | | 0.65 BSC | |
| Overall Height | A | 0.50 | 0.55 | 0.60 |
| Standoff | A1 | 0.00 | 0.02 | 0.05 |
| Terminal Thickness | A3 | | 0.152 REF | |
| Overall Length | D | | 1.00 BSC | |
| Exposed Pad Length | D2 | 0.45 | 0.50 | 0.55 |
| Overall Width | E | | 1.00 BSC | |
| Exposed Pad Width | E2 | 0.45 | 0.50 | 0.55 |
| Terminal Width | b | 0.175 | 0.225 | 0.275 |
| Terminal Length | L | 0.20 | 0.25 | 0.30 |

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-1149 Rev A Sheet 2 of 2


© 2019 Microchip Technology Inc.

chanhvinh.com



## 4-Lead Ultra Thin Plastic Dual Flat, No Lead Package (HCA) - 1x1 mm Body [UDFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

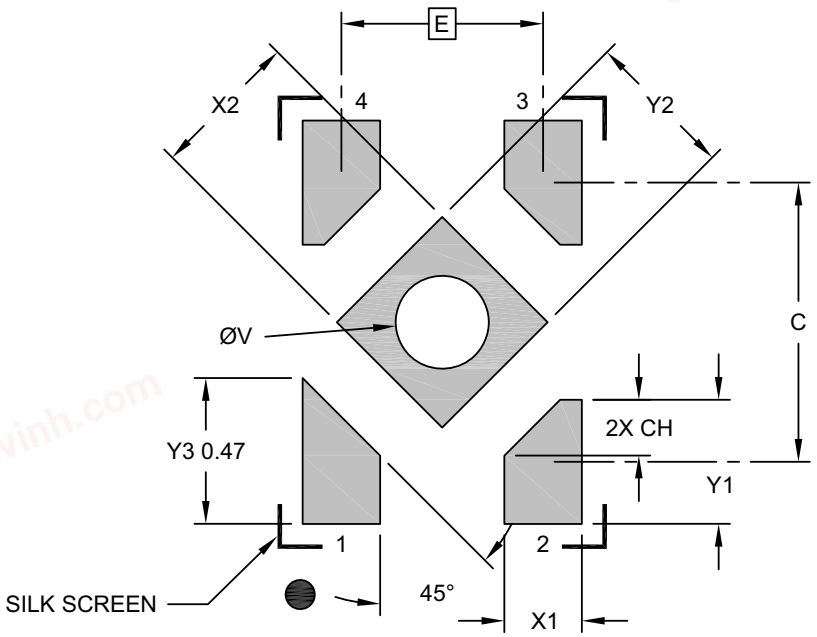


RECOMMENDED LAND PATTERN

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Contact Pitch | E | | 0.65 BSC | |
| Center Pad Width | X2 | | | 0.48 |
| Center Pad Length | Y2 | | | 0.48 |
| Contact Pad Spacing | C | | 0.90 | |
| Contact Pad Width (X4) | X1 | | | 0.25 |
| Contact Pad Length (X3) | Y1 | | | 0.40 |
| Terminal 1 Pad Length | Y3 | | | 0.47 |
| Contact Pad Chamfer (X3) | CH | | 0.18 | |
| Thermal Via Diameter | V | | 0.30 | |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3149 Rev A


© 2019 Microchip Technology Inc.


chanhvinh.com



## 5-Lead SOT23 Package Outline and Recommended Land Pattern

**TITLE**
5 LEAD SOT23 PACKAGE OUTLINE & RECOMMENDED LAND PATTERN

| DRAWING # | SOT23-5LD-PL-1 | UNIT | MM |
|---|---|---|---|

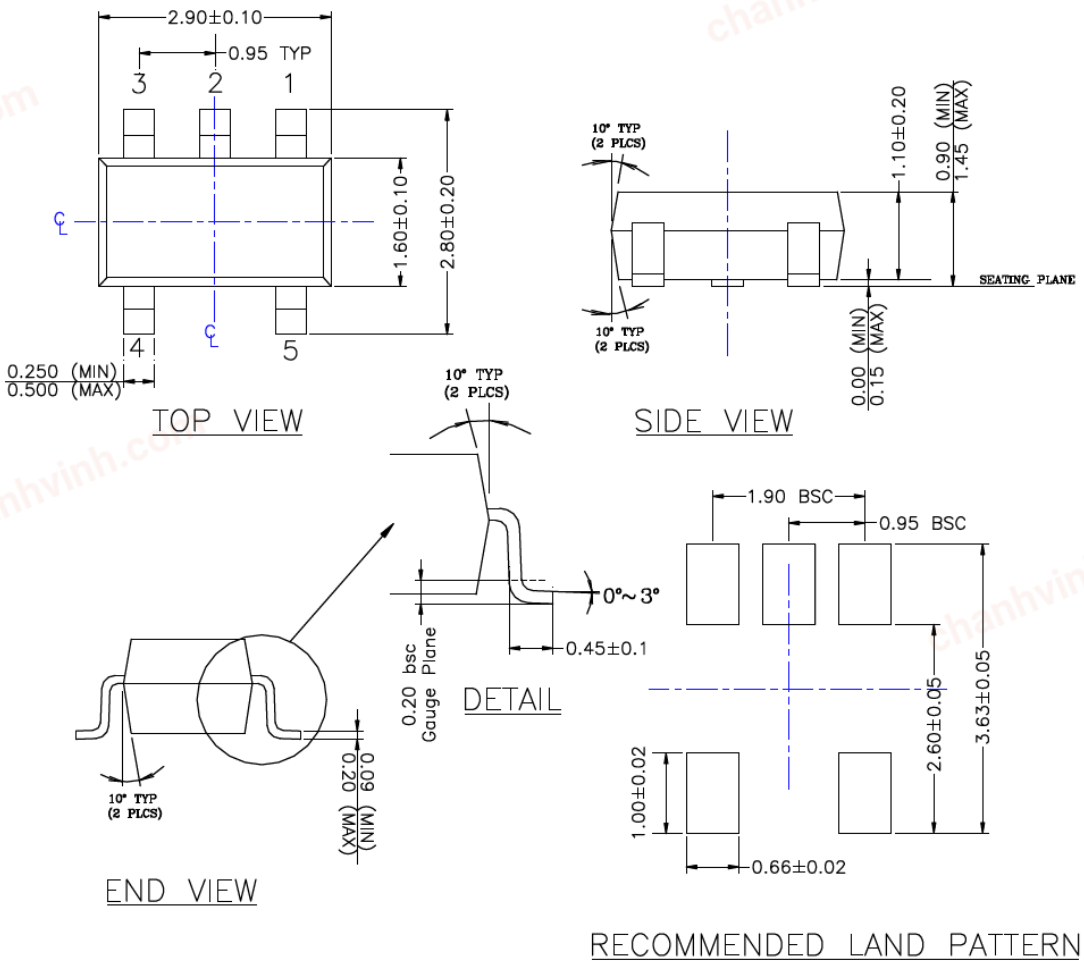


NOTE:
1. PACKAGE OUTLINE EXCLUSIVE OF MOLD FLASH & BURR.
2. PACKAGE OUTLINE INCLUSIVE OF SOLER PLATING.
3. DIMENSION AND TOLERANCE PER ANSI Y14.5M, 1982.
4. FOOT LENGTH MEASUREMENT BASED ON GAUGE PLANE METHOD.
5. DIE FACES UP FOR MOLD, AND FACES DOWN FOR TRIM/FORM.
6. ALL DIMENSIONS ARE IN MILLIMETERS.

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging.


chanhvinh.com




## 5-Lead TSOT23 Package Outline and Recommended Land Pattern

**5-Lead Plastic Thin Small Outline Transistor (D5A) [TSOT]**
**Micrel Legacy Package TSOT-5LD-PL-1**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

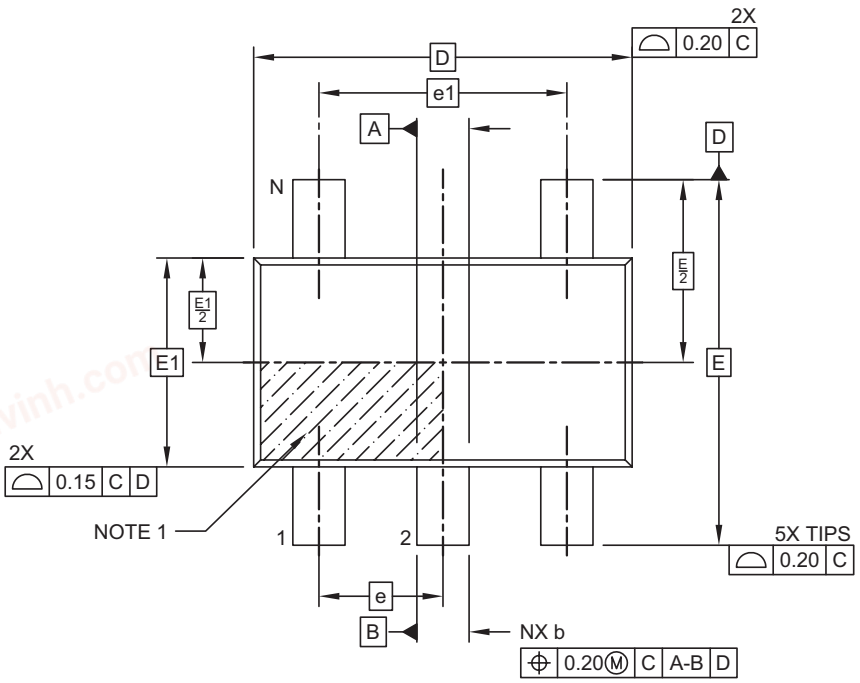


TOP VIEW

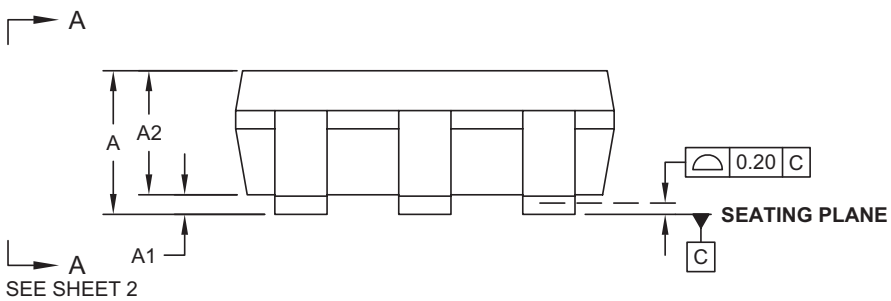


SIDE VIEW

Microchip Technology Drawing C04-1179 Rev A Sheet 1 of 2



© 2019 Microchip Technology Inc.

chanhvinh.com



**5-Lead Plastic Thin Small Outline Transistor (D5A) [TSOT]**
**Micrel Legacy Package TSOT-5LD-PL-1**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

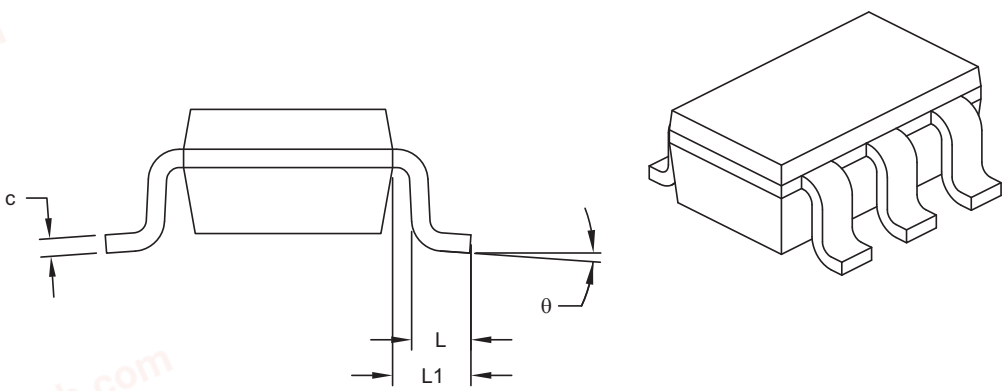


VIEW A-A
SHEET 1

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Number of Leads | N | | 5 | |
| Pitch | e | | 0.95 BSC | |
| Outside lead pitch | e1 | | 1.90 BSC | |
| Overall Height | A | - | - | 1.00 |
| Molded Package Thickness | A2 | 0.84 | 0.87 | 0.90 |
| Standoff | A1 | 0.00 | - | 0.10 |
| Overall Width | E | | 2.80 BSC | |
| Molded Package Width | E1 | | 1.60 BSC | |
| Overall Length | D | | 2.90 BSC | |
| Foot Length | L | 0.30 | 0.40 | 0.50 |
| Footprint | L1 | | 0.60 REF | |
| Foot Angle | ϕ | 0° | - | 4° |
| Lead Thickness | c | | 0.127 REF | |
| Lead Width | b | 0.30 | - | 0.50 |

Notes:
1. Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25mm per side.
2. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.


Microchip Technology Drawing C04-1179 Rev A Sheet 1 of 2

chanhvinh.com



**5-Lead Plastic Thin Small Outline Transistor (D5A) [TSOT]**
**Micrel Legacy Package TSOT-5LD-PL-1**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

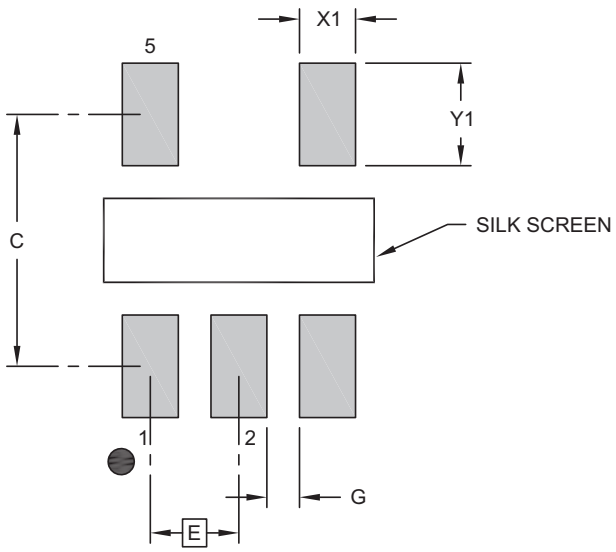


RECOMMENDED LAND PATTERN

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Contact Pitch | E | | 0.95 BSC | |
| Contact Pad Spacing | C | | 2.60 | |
| Contact Pad Width (X5) | X1 | | | 0.60 |
| Contact Pad Length (X5) | Y1 | | | 1.10 |
| Contact Pad to Center Pad (X2) | G | 0.20 | | |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-3179 Rev A


© 2019 Microchip Technology Inc.

chanhvinh.com



# APPENDIX A: REVISION HISTORY

## Revision A (April 2019)

- Converted Micrel document MIC5317 to Microchip data sheet template DS20006195A.
- Minor grammatical text changes throughout.

## Revision B (September 2019)

- Updated **Section 4.0 “Application Information”** with adding this new sentence - The MIC5317 is not suitable for RF transmitter systems.

chanhvinh.com

chanhvinh.com



**NOTES:**

chanhvinh.com


© 2019 Microchip Technology Inc.

chanhvinh.com



## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, contact your local Microchip representative or sales office.

| Device | -X.X | X | XX | -XX |
|---|---|---|---|---|
| Part No. | | Junction Temp. Range | Package | Media Type |

| | | |
|---|---|---|
| **Device:** | MIC5317: | High Performance Single 150mA LDO |
| **Output Voltage:** | 1.0 = 1.0V<br>1.2 = 1.2V<br>1.5 = 1.5V<br>1.8 = 1.8V<br>2.5 = 2.5V<br>2.8 = 2.8V<br>3.0 = 3.0V<br>3.3 = 3.3V | |
| **Junction Temperature Range:** | Y = | –40°C to +125°C, RoHS-Compliant |
| **Package:** | MT = 4-Lead 1 mm x 1 mm UDFN<br>M5 = 5-Lead SOT23<br>D5 = 5-Lead Thin SOT23 | |
| **Media Type:** | TR = 3,000/Reel<br>TZ = 10,000/Reel (MT Package Option Only) | |

**Examples:**

a) MIC5317-1.0YMT-TR: MIC5317, 1.0V Output Voltage, –40°C to +125°C Temperature Range, 4-Lead 1 mm x 1 mm UDFN, 3,000/Reel

b) MIC5317-1.5YM5-TR: MIC5317, 1.5V Output Voltage, –40°C to +125°C Temperature Range, 5-Lead SOT23, 3,000/Reel

c) MIC5317-2.5YD5-TR: MIC5317, 2.5V Output Voltage, –40°C to +125°C Temperature Range, 5-Lead Thin SOT23, 3,000/Reel

d) MIC5317-2.8YMT-TZ: MIC5317, 2.8V Output Voltage, –40°C to +125°C Temperature Range, 4-Lead 1 mm x 1 mm UDFN, 10,000/Reel

e) MIC5317-3.0YM5-TR: MIC5317, 3.0V Output Voltage, –40°C to +125°C Temperature Range, 5-Lead SOT23, 3,000/Reel

f) MIC5317-3.3YD5-TR: MIC5317, 3.3V Output Voltage, –40°C to +125°C Temperature Range, 5-Lead Thin SOT23, 3,000/Reel

**Note 1:** Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.

chanhvinh.com

chanhvinh.com



**NOTES:**

chanhvinh.com


© 2019 Microchip Technology Inc.

chanhvinh.com

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE**.** Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

**Trademarks**

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PackeTime, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TempTrackr, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, FlashTec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, Vite, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, INICnet, Inter-Chip Connectivity, JitterBlocker, KleerNet, KleerNet logo, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2019, Microchip Technology Incorporated, All Rights Reserved.

ISBN: 978-1-5224-5088-7

*For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.*

chanhvinh.com

# Worldwide Sales and Service

## AMERICAS

**Corporate Office**
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
http://www.microchip.com/support
Web Address:
www.microchip.com

**Atlanta**
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

**Austin, TX**
Tel: 512-257-3370

**Boston**
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

**Chicago**
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

**Dallas**
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

**Detroit**
Novi, MI
Tel: 248-848-4000

**Houston, TX**
Tel: 281-894-5983

**Indianapolis**
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

**Los Angeles**
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

**Raleigh, NC**
Tel: 919-844-7510

**New York, NY**
Tel: 631-435-6000

**San Jose, CA**
Tel: 408-735-9110
Tel: 408-436-4270

**Canada - Toronto**
Tel: 905-695-1980
Fax: 905-695-2078

## ASIA/PACIFIC

**Australia - Sydney**
Tel: 61-2-9868-6733

**China - Beijing**
Tel: 86-10-8569-7000

**China - Chengdu**
Tel: 86-28-8665-5511

**China - Chongqing**
Tel: 86-23-8980-9588

**China - Dongguan**
Tel: 86-769-8702-9880

**China - Guangzhou**
Tel: 86-20-8755-8029

**China - Hangzhou**
Tel: 86-571-8792-8115

**China - Hong Kong SAR**
Tel: 852-2943-5100

**China - Nanjing**
Tel: 86-25-8473-2460

**China - Qingdao**
Tel: 86-532-8502-7355

**China - Shanghai**
Tel: 86-21-3326-8000

**China - Shenyang**
Tel: 86-24-2334-2829

**China - Shenzhen**
Tel: 86-755-8864-2200

**China - Suzhou**
Tel: 86-186-6233-1526

**China - Wuhan**
Tel: 86-27-5980-5300

**China - Xian**
Tel: 86-29-8833-7252

**China - Xiamen**
Tel: 86-592-2388138

**China - Zhuhai**
Tel: 86-756-3210040

## ASIA/PACIFIC

**India - Bangalore**
Tel: 91-80-3090-4444

**India - New Delhi**
Tel: 91-11-4160-8631

**India - Pune**
Tel: 91-20-4121-0141

**Japan - Osaka**
Tel: 81-6-6152-7160

**Japan - Tokyo**
Tel: 81-3-6880- 3770

**Korea - Daegu**
Tel: 82-53-744-4301

**Korea - Seoul**
Tel: 82-2-554-7200

**Malaysia - Kuala Lumpur**
Tel: 60-3-7651-7906

**Malaysia - Penang**
Tel: 60-4-227-8870

**Philippines - Manila**
Tel: 63-2-634-9065

**Singapore**
Tel: 65-6334-8870

**Taiwan - Hsin Chu**
Tel: 886-3-577-8366

**Taiwan - Kaohsiung**
Tel: 886-7-213-7830

**Taiwan - Taipei**
Tel: 886-2-2508-8600

**Thailand - Bangkok**
Tel: 66-2-694-1351

**Vietnam - Ho Chi Minh**
Tel: 84-28-5448-2100

## EUROPE

**Austria - Wels**
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

**Denmark - Copenhagen**
Tel: 45-4450-2828
Fax: 45-4485-2829

**Finland - Espoo**
Tel: 358-9-4520-820

**France - Paris**
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

**Germany - Garching**
Tel: 49-8931-9700

**Germany - Haan**
Tel: 49-2129-3766400

**Germany - Heilbronn**
Tel: 49-7131-72400

**Germany - Karlsruhe**
Tel: 49-721-625370

**Germany - Munich**
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

**Germany - Rosenheim**
Tel: 49-8031-354-560

**Israel - Ra'anana**
Tel: 972-9-744-7705

**Italy - Milan**
Tel: 39-0331-742611
Fax: 39-0331-466781

**Italy - Padova**
Tel: 39-049-7625286

**Netherlands - Drunen**
Tel: 31-416-690399
Fax: 31-416-690340

**Norway - Trondheim**
Tel: 47-7288-4388

**Poland - Warsaw**
Tel: 48-22-3325737

**Romania - Bucharest**
Tel: 40-21-407-87-50

**Spain - Madrid**
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

**Sweden - Gothenberg**
Tel: 46-31-704-60-40

**Sweden - Stockholm**
Tel: 46-8-5090-4654

**UK - Wokingham**
Tel: 44-118-921-5800
Fax: 44-118-921-5820


© 2019 Microchip Technology Inc.