chanhvinh.com

MIC94080/1/2/3/4/5

67 mΩ $R_{DS(ON)}$ 2A High-Side Load Switch in 0.85 mm x 0.85 mm UDFN Package

Features


- Space-Saving 0.85 mm x 0.85 mm 4-Lead UDFN Package
- Input Voltage Range: 1.7V to 5.5V
- 2A Continuous Operating Current
- 67 mΩ $R_{DS(ON)}$
- Internal Level Shift for CMOS/TTL Control Logic
- Ultra-Low Quiescent Current
- Micropower Shutdown Current
- Soft-Start: MIC94082/3 (800 µs), MIC94084/5 (120 µs)
- Load Discharge Circuit: MIC94081, MIC94083, MIC94085
- Ultra-Fast Turn-Off Time
- –40°C to +125°C Junction Operating Temperature

Applications

- Cellular Phones
- Portable Navigation Devices (PND)
- Personal Media Players (PMP)
- Ultra-Mobile PCs
- Portable Instrumentation
- Other Portable Applications
- PDAs
- GPS Modules
- Industrial and Datacom Equipment

Package Type

MIC94080/1/2/3/4/5
4-Lead 0.85 mm x 0.85 mm UDFN
(Top View)

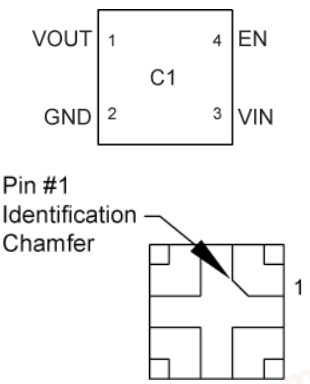

General Description

The MIC94080/1/2/3/4/5 is a family of high-side load switches designed to operate from 1.7V to 5.5V input voltage. The load switch pass element is an internal 67 mΩ $R_{DS(ON)}$ P-Channel MOSFET that enables the device to support up to 2A of continuous current. Additionally, the load switch supports 1.5V logic level control and shutdown features in a tiny 0.85 mm x 0.85 mm 4-lead UDFN package.

The MIC94080 and MIC94081 feature rapid turn on. The MIC94082 and MIC94083 provide a slew rate controlled soft-start turn-on of 800 µs, while the MIC94084 and MIC94085 provide a slew rate controlled soft-start turn-on of 120 µs. The soft-start feature is provided to prevent an in-rush current event from pulling down the input supply voltage.

The MIC94081, MIC94083, and MIC94085 feature an active load discharge circuit which switches in a 250Ω load when the switch is disabled to automatically discharge a capacitive load.

An active pull-down on the enable input keeps the MIC94080/1/2/3/4/5 in a default OFF state until the enable pin is pulled above 1.25V. Internal level shift circuitry allows low voltage logic signals to switch higher supply voltages. The enable voltage can be as high as 5.5V and is not limited by the input voltage.


The MIC94080/1/2/3/4/5 operating voltage range makes them ideal for Lithium ion and NiMH/NiCad/Alkaline battery powered systems, as well as non-battery powered applications. The devices provide low quiescent current and low shutdown current to maximize battery life.

© 2019-2026 Microchip Technology Inc. and its subsidiaries


chanhvinh.com

Typical Application Circuits

MIC94080 (Ultra-Fast Turn-On)
MIC94082 (800 µs Soft-Start)
MIC94084 (120 µs Soft-Start)

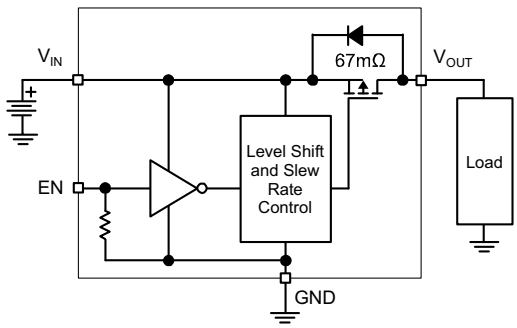

MIC94081 (Ultra-Fast Turn-On w/ Auto-Discharge)
MIC94083 (800 µs Soft-Start w/ Auto-Discharge)
MIC94085 (120 µs Soft-Start w/ Auto-Discharge)

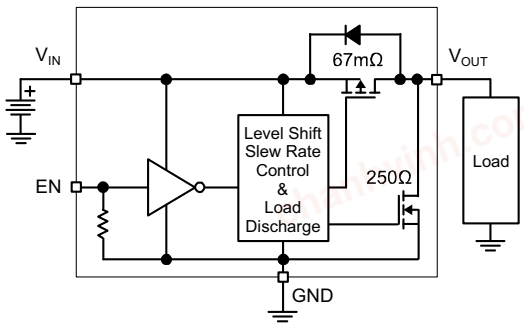

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

1.0 ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings †

Input Voltage (V_{IN}) ..... +6V
Enable Voltage (V_{EN}) ..... +6V
Continuous Drain Current (I_D) (Note 1)
T_A = +25°C ..... ±2.0A
T_A = +85°C ..... ±1.5A
Pulsed Drain Current (I_{DP}) (Note 2) ..... ±6.0A
Continuous Diode Current (I_S) (Note 3) ..... –50 mA
Storage Temperature (T_S) ..... –55°C to +150°C
ESD Rating (HBM, Note 4) ..... 3 kV

Operating Ratings ††

Input Voltage (V_{IN}) ..... +1.7V to +5.5V
Junction Temperature Range (T_J) ..... –40°C to +125°C
Package Thermal Resistance
4-Ld UDFN 0.85 mm x 0.85 mm (θ_{JA}) ..... 140°C/W
4-Ld UDFN 0.85 mm x 0.85 mm (θ_{JC}) ..... 85°C/W

† Notice: Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational sections of this specification is not intended. Exposure to maximum rating conditions for extended periods may affect device reliability.

†† Notice: The device is not guaranteed to function outside its operating ratings.

Note 1: With thermal contact to PCB. See Thermal Considerations section.

2: Pulse width <300 µs with <2% duty cycle.

3: Continuous body diode current conduction (reverse conduction, i.e. V_{OUT} to V_{IN}) is not recommended.

4: Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5 kΩ in series with 100 pF.

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

ELECTRICAL CHARACTERISTICS

Electrical Characteristics: T_A = +25°C, **bold** values indicate –40°C ≤ T_A ≤ +85°C, unless noted.

Parameter	Sym.	Min.	Typ.	Max.	Units	Conditions
Enable Threshold Voltage	V_{EN_TH}	**0.4**	—	**1.25**	V	V_{IN} = 1.7V to 4.5V, I_D = –250 µA
Quiescent Current	I_Q	—	0.1	**1**	µA	V_{IN} = V_{EN} = 5.5V, I_D = OPEN Measured on V_{IN} MIC94080/1
		—	8	**15**		V_{IN} = V_{EN} = 5.5V, I_D = OPEN Measured on V_{IN} MIC94082/3/4/5
Enable Input Current	I_{EN}	—	2.8	**4**	µA	V_{IN} = V_{EN} = 5.5V, I_D = OPEN
Quiescent Current (Shutdown)	I_{SHUT-Q}	—	0.02	**1**	µA	V_{IN} = +5.5V, V_{EN} = 0V, I_D = OPEN Measured on V_{IN}, Note 1
OFF State Leakage Current	$I_{SHUT-SWITCH}$	—	0.02	**1**	µA	V_{IN} = +5.5V, V_{EN} = 0V, I_D = SHORT Measured on V_{IN}, Note 1
P-Channel Drain-to-Source ON Resistance	$R_{DS(ON)}$	—	67	**115**	mΩ	V_{IN} = +5.0V, I_D = –100 mA, V_{EN} = 1.5V
		—	70	**130**		V_{IN} = +4.5V, I_D = –100 mA, V_{EN} = 1.5V
		—	80	**165**		V_{IN} = +3.6V, I_D = –100 mA, V_{EN} = 1.5V
		—	110	**225**		V_{IN} = +2.5V, I_D = –100 mA, V_{EN} = 1.5V
		—	175	**350**		V_{IN} = +1.8V, I_D = –100 mA, V_{EN} = 1.5V
		—	200	**375**		V_{IN} = +1.7V, I_D = –100 mA, V_{EN} = 1.5V
Turn-Off Resistance	$R_{SHUTDOWN}$	—	250	**400**	Ω	V_{IN} = +3.6V, I_{TEST} = 1 mA, V_{EN} = 0V MIC94081/3/5
Dynamic Electrical Characteristics						
Turn-On Delay	t_{ON_DLY}	—	0.4	1.5	µs	V_{IN} = +3.6V, I_D = –100 mA, V_{EN} = 1.5V MIC94080, MIC94081
		200	600	1500		V_{IN} = +3.6V, I_D = –100 mA, V_{EN} = 1.5V MIC94082, MIC94083
		65	110	165		V_{IN} = +3.6V, I_D = –100 mA, V_{EN} = 1.5V MIC94084, MIC94085
Turn-On Rise Time	t_{ON_RISE}	—	0.4	1.5	µs	V_{IN} = +3.6V, I_D = –100 mA, V_{EN} = 1.5V MIC94080, MIC94081
		400	800	1500		V_{IN} = +3.6V, I_D = –100 mA, V_{EN} = 1.5V MIC94082, MIC94083
		65	120	175		V_{IN} = +3.6V, I_D = –100 mA, V_{EN} = 1.5V MIC94084, MIC94085
Turn-Off Delay Time	t_{OFF_DLY}	—	60	200	ns	V_{IN} = +3.6V, I_D = –100 mA, V_{EN} = 0V
Turn-Off Fall Time	t_{OFF_FALL}	—	20	100	ns	V_{IN} = +3.6V, I_D = –100 mA, V_{EN} = 0V

Note 1: Measured on the MIC94080YFT.

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

TEMPERATURE SPECIFICATIONS

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Temperature Ranges						
Junction Temperature Range	T_J	–40	—	+125	°C	—
Storage Temperature Range	T_S	–55	—	+150	°C	—
Package Thermal Resistances						
Thermal Resistance, 4-Ld UDFN 0.85 mm x 0.85 mm	θ_{JA}	—	140	—	°C/W	—
Thermal Resistance, 4-Ld UDFN 0.85 mm x 0.85 mm	θ_{JC}	—	85	—	°C/W	—

Note 1: The maximum allowable power dissipation is a function of ambient temperature, the maximum allowable junction temperature and the thermal resistance from junction to air (i.e., T_A, T_J, θ_{JA}). Exceeding the maximum allowable power dissipation will cause the device operating junction temperature to exceed the maximum +125°C rating. Sustained junction temperatures above +125°C can impact the device reliability.

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

2.0 TYPICAL PERFORMANCE CURVES

Note: The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

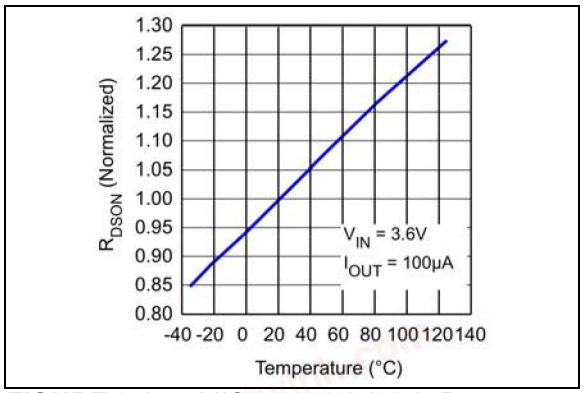


FIGURE 2-1: *MIC94080/1/2/3/4/5 $R_{DS(ON)}$ Variance vs. Temperature.*

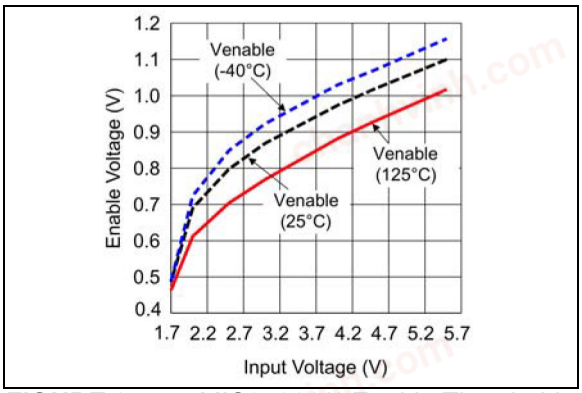


FIGURE 2-4: *MIC94080/1 Enable Threshold vs. Input Voltage.*

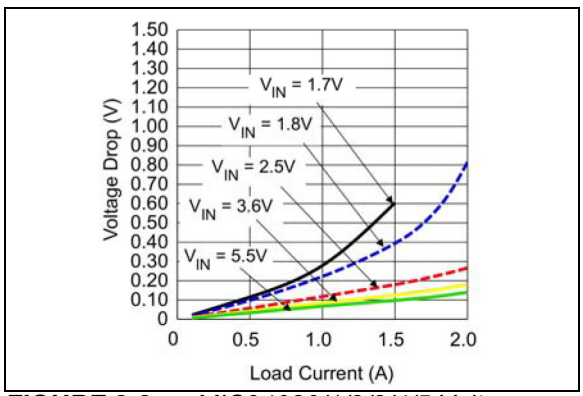


FIGURE 2-2: *MIC94080/1/2/3/4/5 Voltage Drop vs. Load Current.*

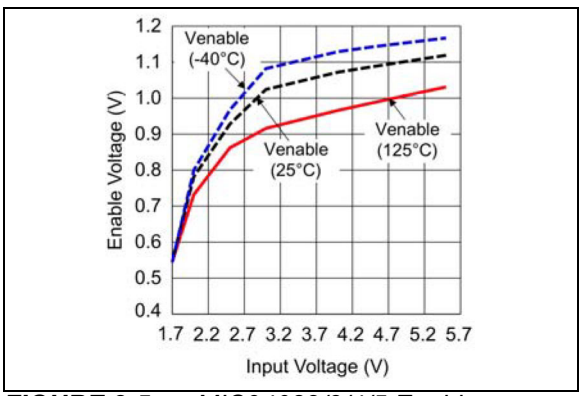


FIGURE 2-5: *MIC94082/3/4/5 Enable Threshold vs. Input Voltage.*

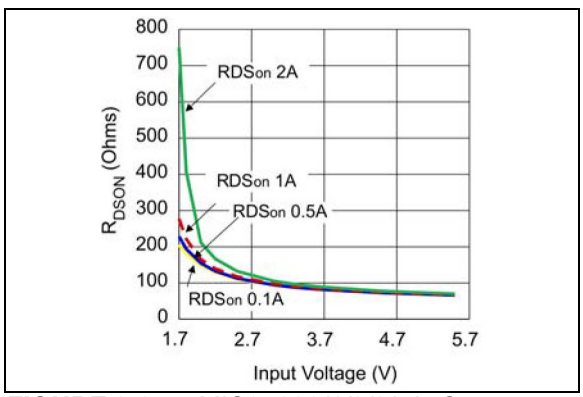


FIGURE 2-3: *MIC94080/1/2/3/4/5 On Resistance vs. Input Voltage.*

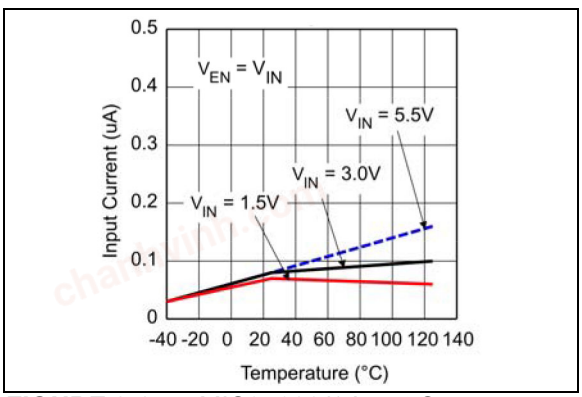


FIGURE 2-6: *MIC94080/1 Input Current vs. Temperature.*

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

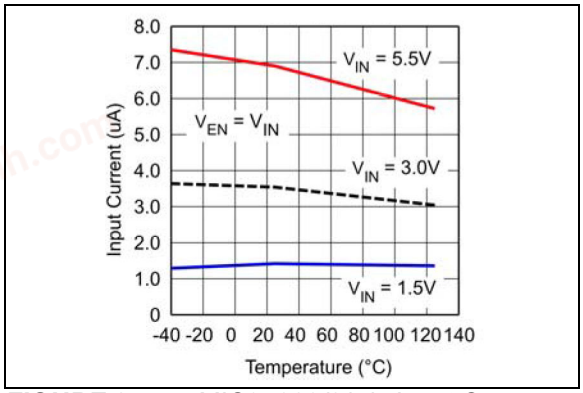


FIGURE 2-7: *MIC94082/3/4/5 Input Current vs. Temperature.*

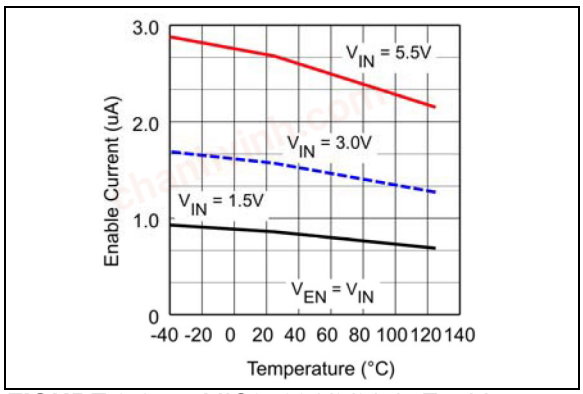


FIGURE 2-8: *MIC94081/2/3/4/5 Enable Current vs. Temperature.*

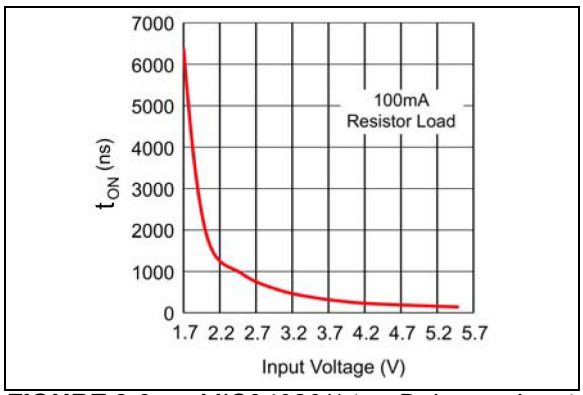


FIGURE 2-9: *MIC94080/1 t_{ON} Delay vs. Input Voltage.*

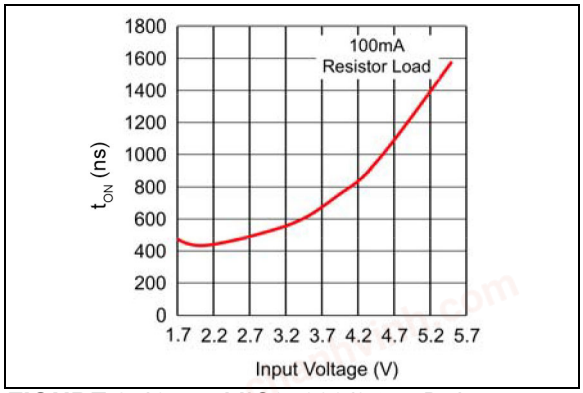


FIGURE 2-10: *MIC94082/3 t_{ON} Delay vs. Input Voltage.*

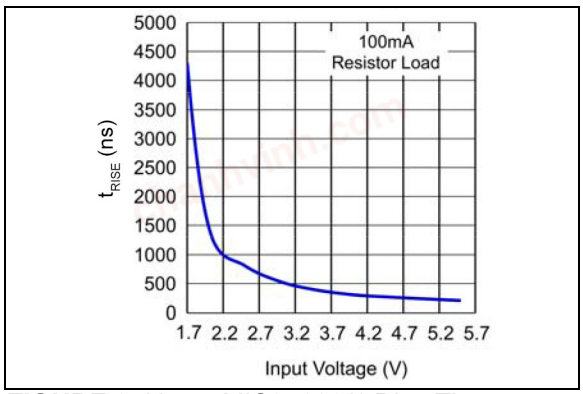


FIGURE 2-11: *MIC94080/1 Rise Time vs. Input Voltage.*

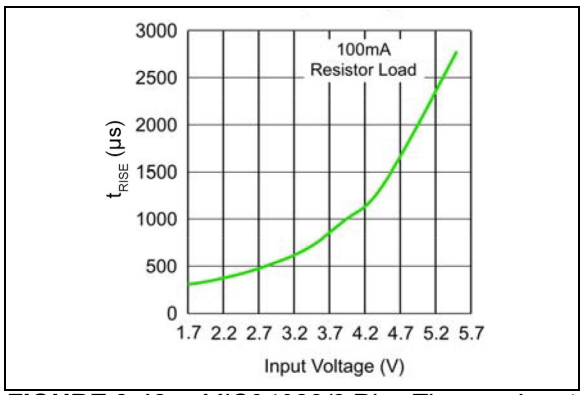


FIGURE 2-12: *MIC94082/3 Rise Time vs. Input Voltage.*

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

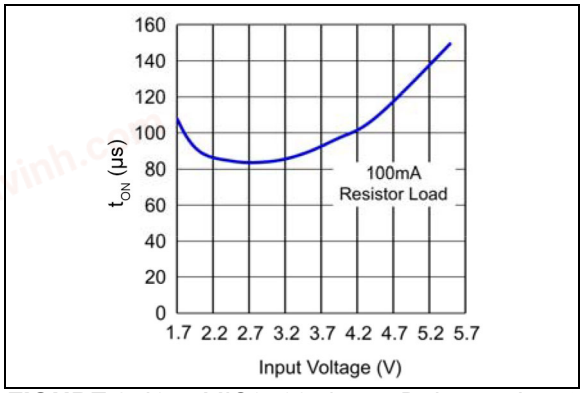


FIGURE 2-13: *MIC94084/5 t_{ON} Delay vs. Input Voltage.*

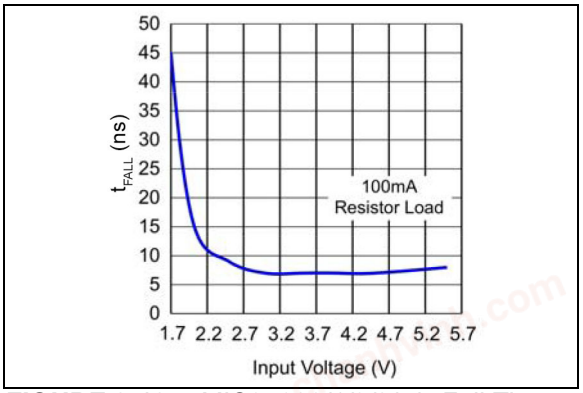


FIGURE 2-16: *MIC94080/1/2/3/4/5 Fall Time vs. Input Voltage.*

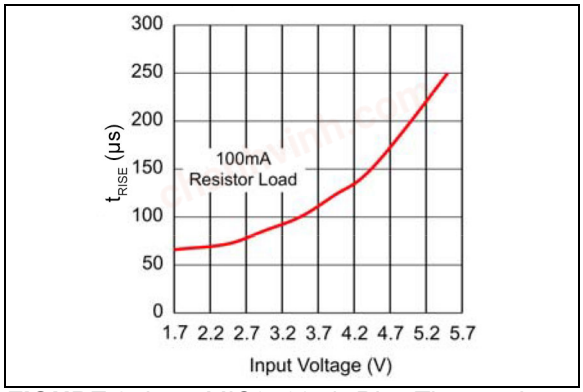


FIGURE 2-14: *MIC94084/5 Rise Time vs. Input Voltage.*

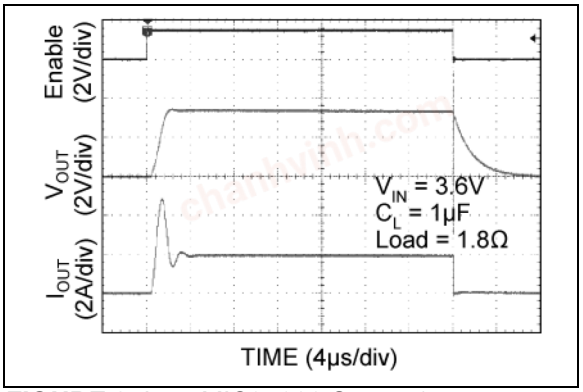


FIGURE 2-17: *MIC94080 Scope 1.*

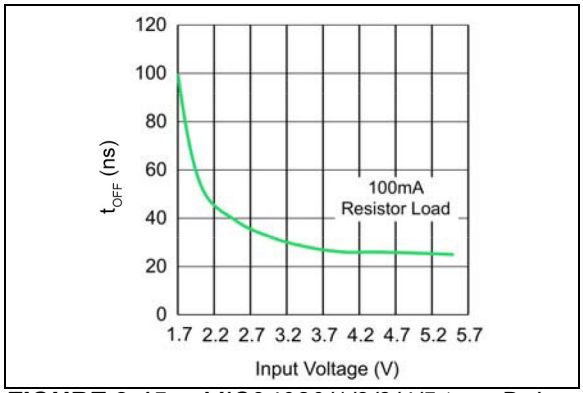


FIGURE 2-15: *MIC94080/1/2/3/4/5 t_{OFF} Delay vs. Input Voltage.*

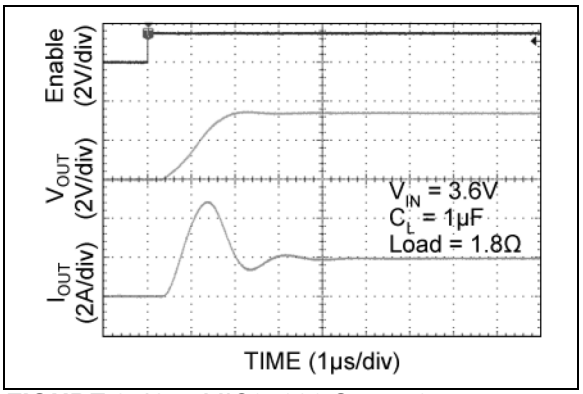


FIGURE 2-18: *MIC94080 Scope 2.*

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

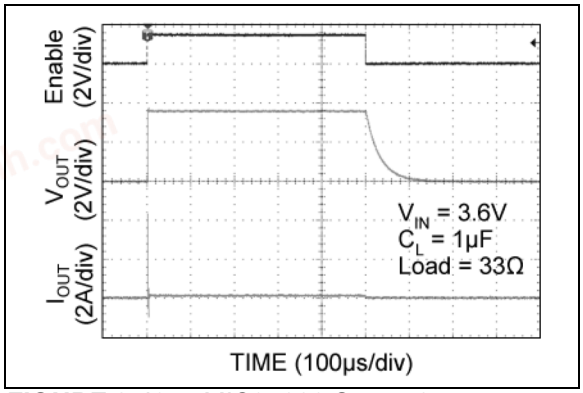


FIGURE 2-19: *MIC94080 Scope 3.*

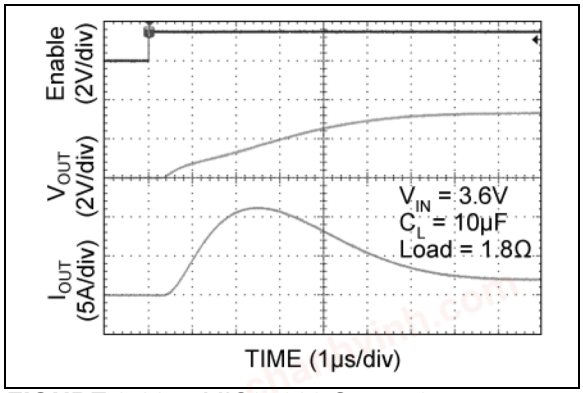


FIGURE 2-22: *MIC94080 Scope 6.*

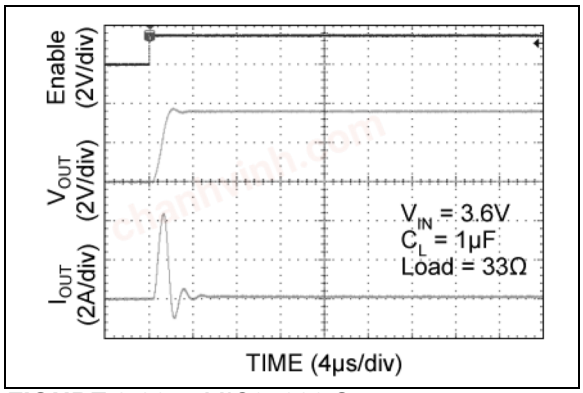


FIGURE 2-20: *MIC94080 Scope 4.*

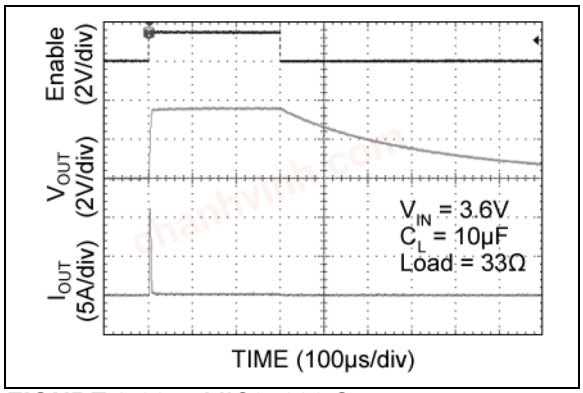


FIGURE 2-23: *MIC94080 Scope 7.*

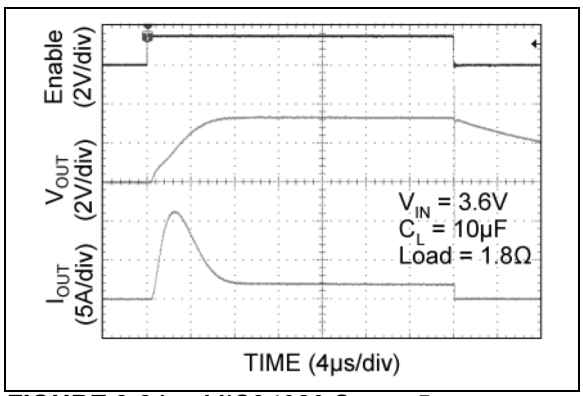


FIGURE 2-21: *MIC94080 Scope 5.*

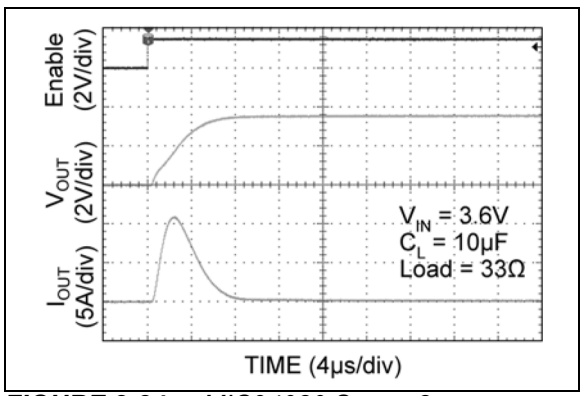


FIGURE 2-24: *MIC94080 Scope 8.*

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

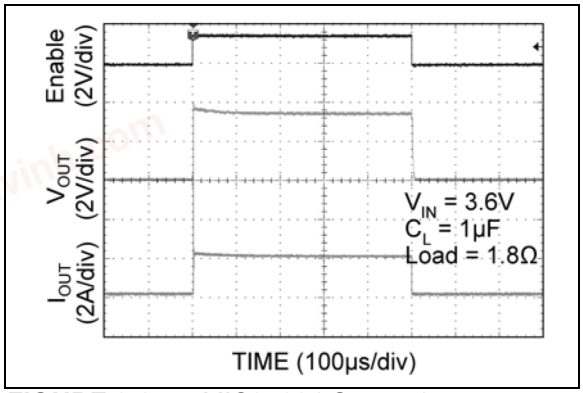


FIGURE 2-25: *MIC94081 Scope 1.*

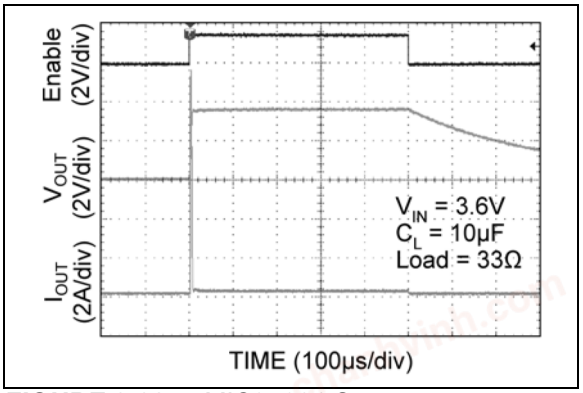


FIGURE 2-28: *MIC94081 Scope 4.*

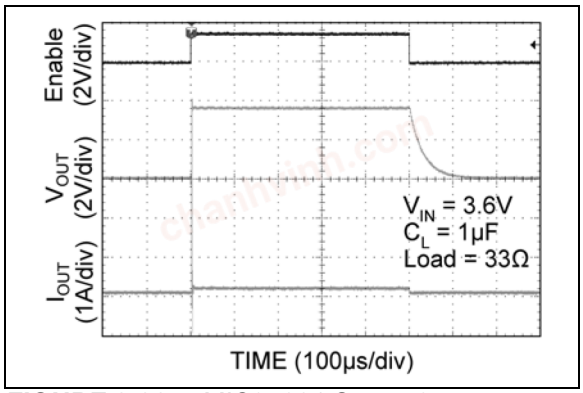


FIGURE 2-26: *MIC94081 Scope 2.*

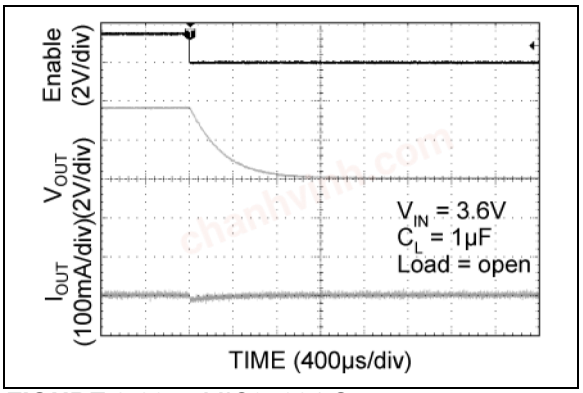


FIGURE 2-29: *MIC94081 Scope 5.*

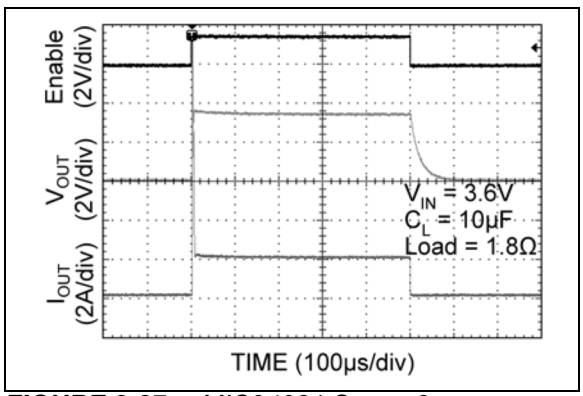


FIGURE 2-27: *MIC94081 Scope 3.*

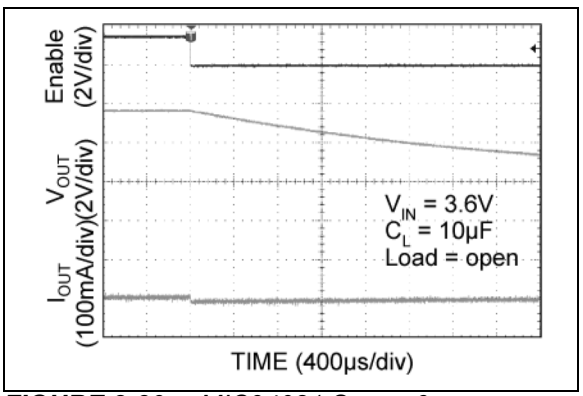


FIGURE 2-30: *MIC94081 Scope 6.*

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

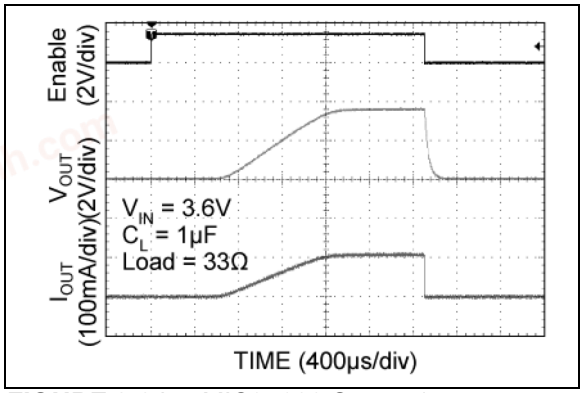


FIGURE 2-31: *MIC94082 Scope 1.*

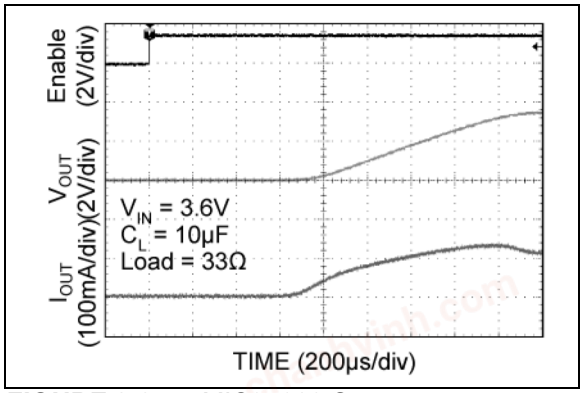


FIGURE 2-34: *MIC94082 Scope 4.*

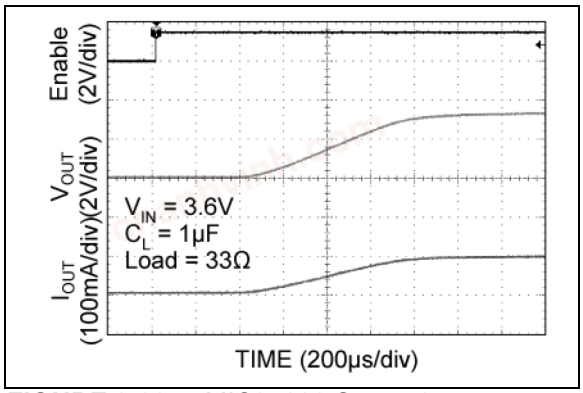


FIGURE 2-32: *MIC94082 Scope 2.*

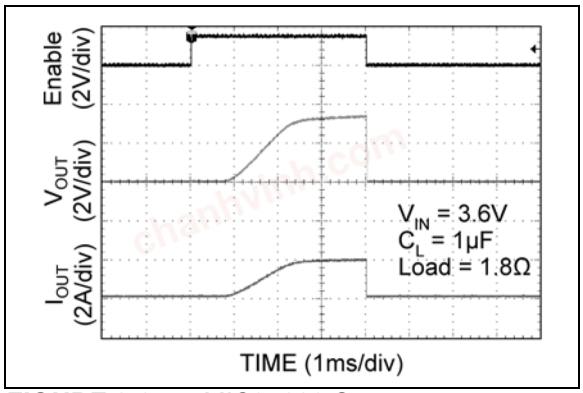


FIGURE 2-35: *MIC94082 Scope 5.*

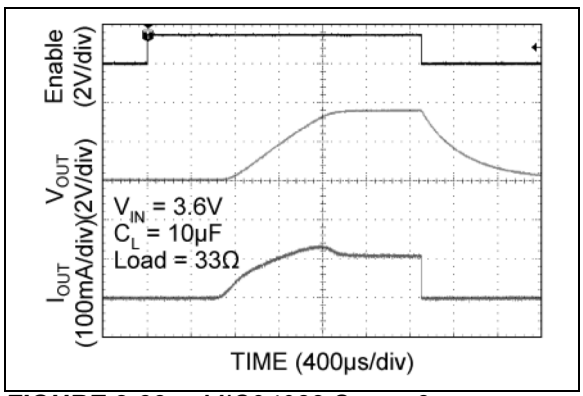


FIGURE 2-33: *MIC94082 Scope 3.*

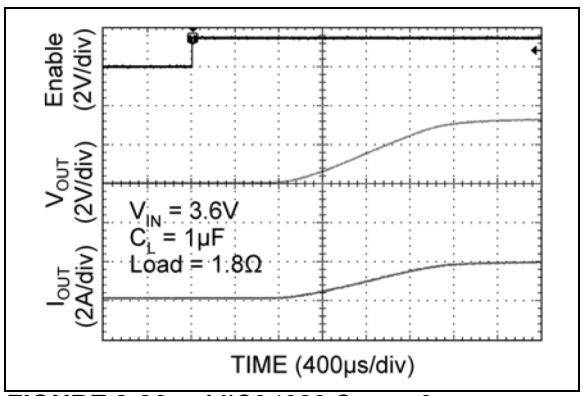


FIGURE 2-36: *MIC94082 Scope 6.*

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

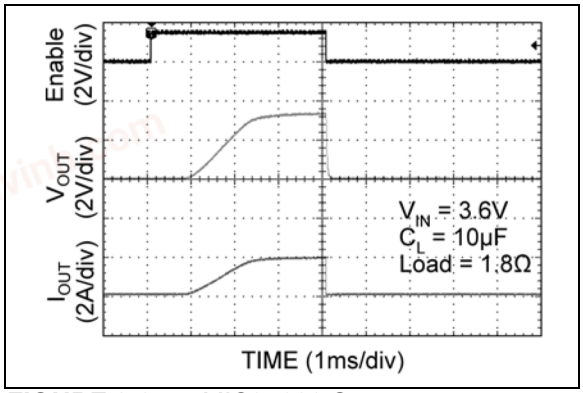


FIGURE 2-37: *MIC94082 Scope 7.*

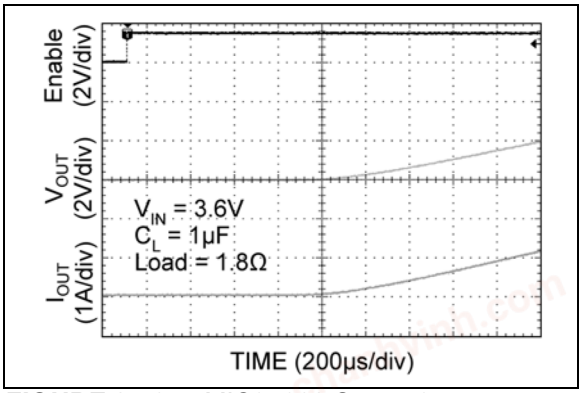


FIGURE 2-40: *MIC94083 Scope 2.*

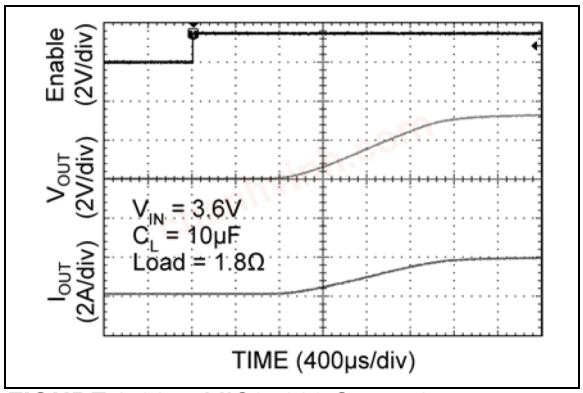


FIGURE 2-38: *MIC94082 Scope 8.*

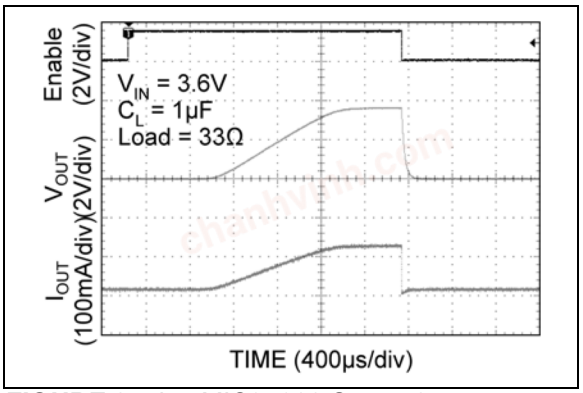


FIGURE 2-41: *MIC94083 Scope 3.*

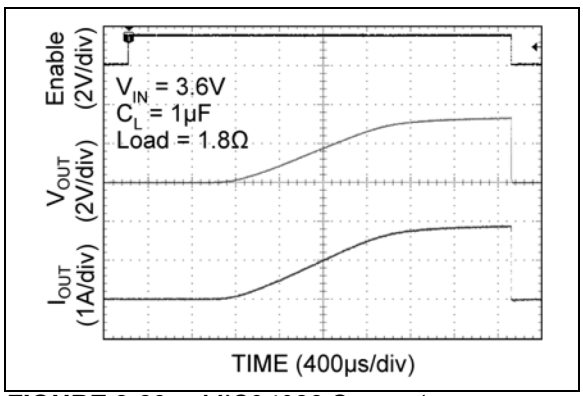


FIGURE 2-39: *MIC94083 Scope 1.*

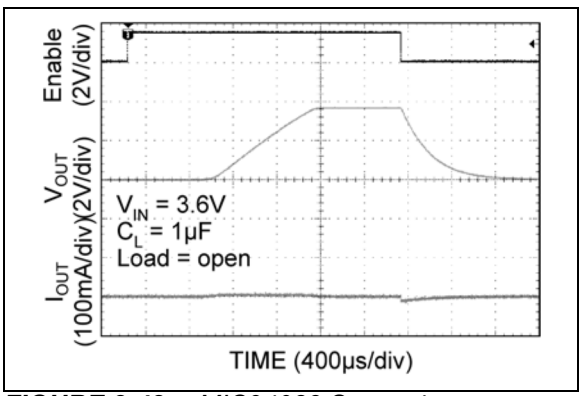


FIGURE 2-42: *MIC94083 Scope 4.*

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

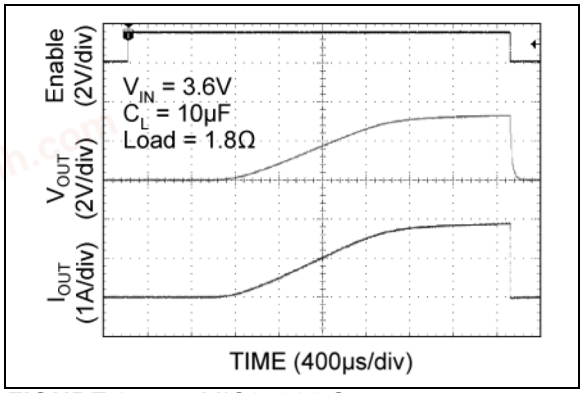


FIGURE 2-43: *MIC94083 Scope 5.*

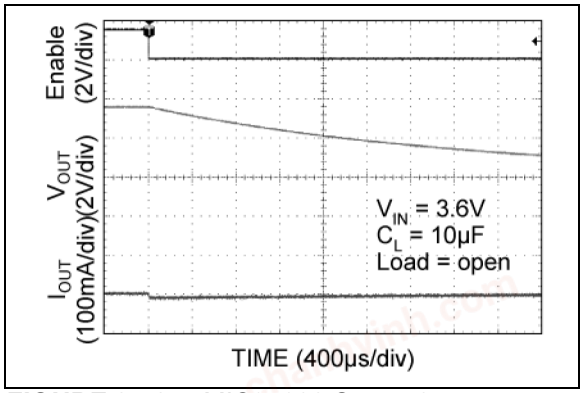


FIGURE 2-46: *MIC94083 Scope 8.*

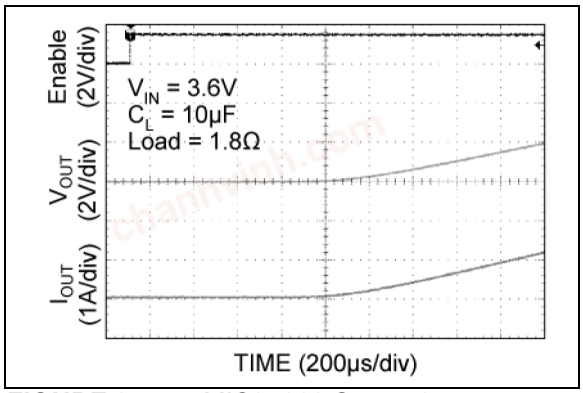


FIGURE 2-44: *MIC94083 Scope 6.*

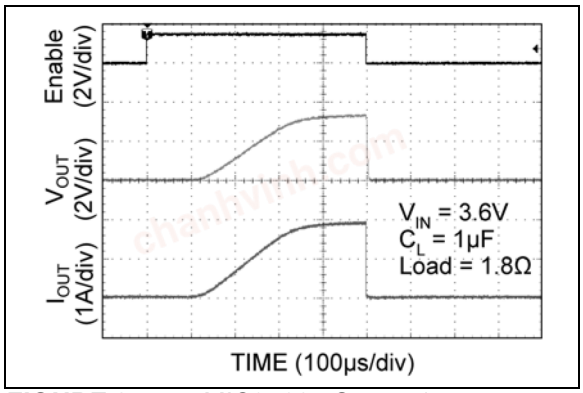


FIGURE 2-47: *MIC94084 Scope 1.*

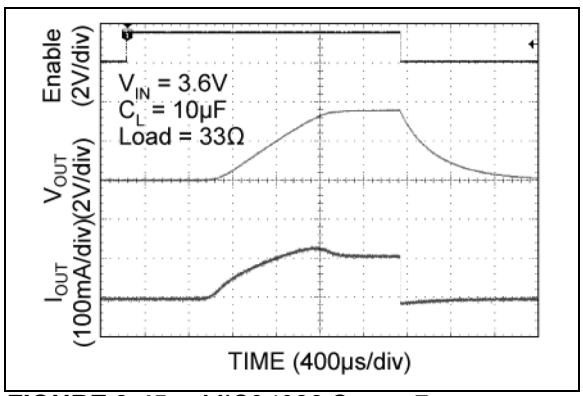


FIGURE 2-45: *MIC94083 Scope 7.*

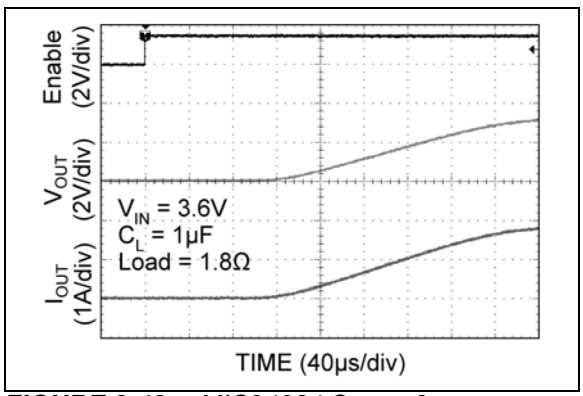


FIGURE 2-48: *MIC94084 Scope 2.*

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

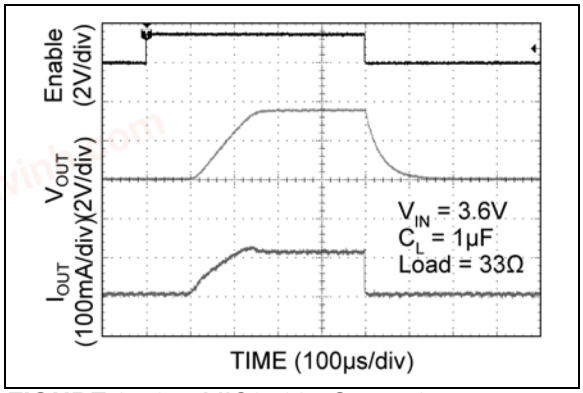


FIGURE 2-49: *MIC94084 Scope 3.*

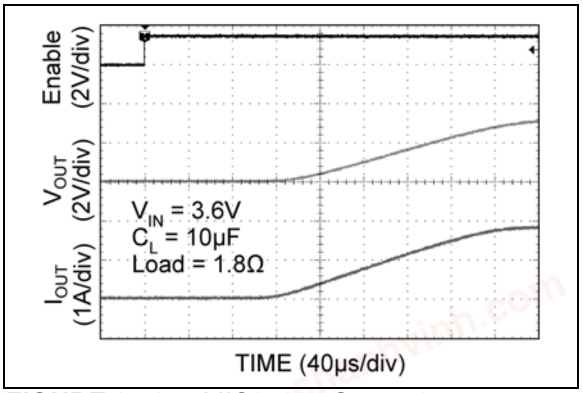


FIGURE 2-52: *MIC94084 Scope 6.*

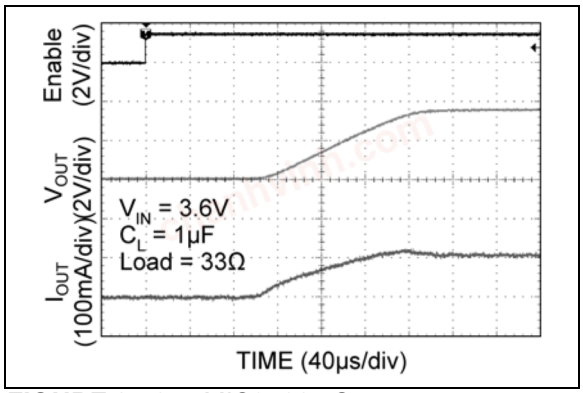


FIGURE 2-50: *MIC94084 Scope 4.*

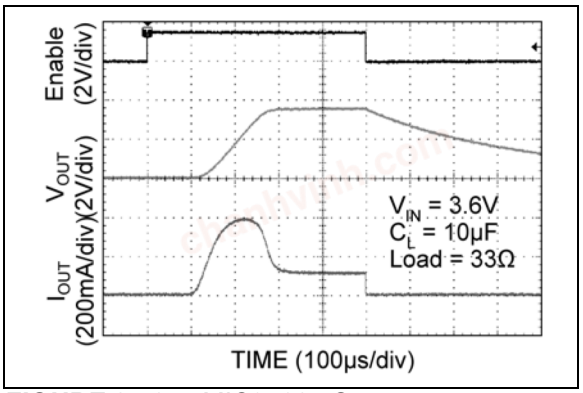


FIGURE 2-53: *MIC94084 Scope 7.*

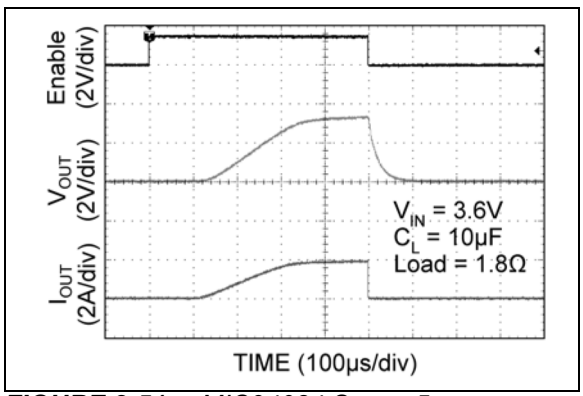


FIGURE 2-51: *MIC94084 Scope 5.*

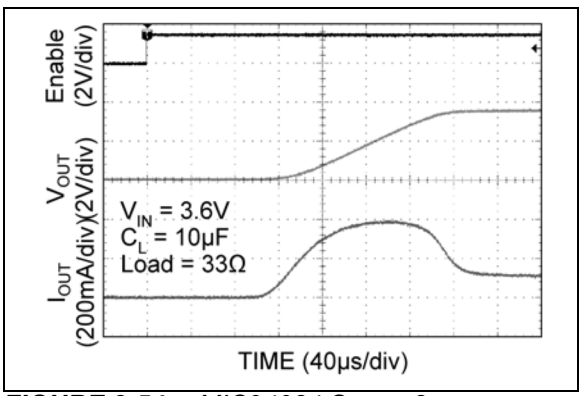


FIGURE 2-54: *MIC94084 Scope 8.*

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

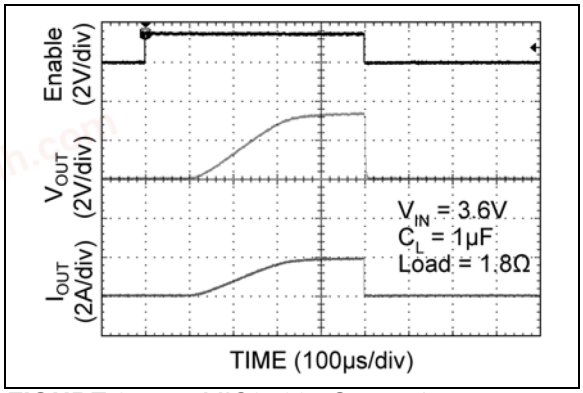


FIGURE 2-55: *MIC94085 Scope 1.*

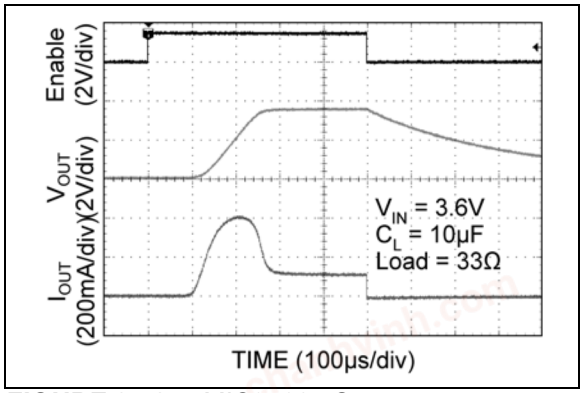


FIGURE 2-58: *MIC94085 Scope 4.*

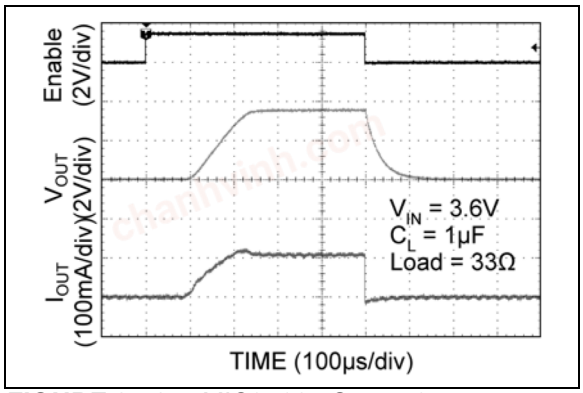


FIGURE 2-56: *MIC94085 Scope 2.*

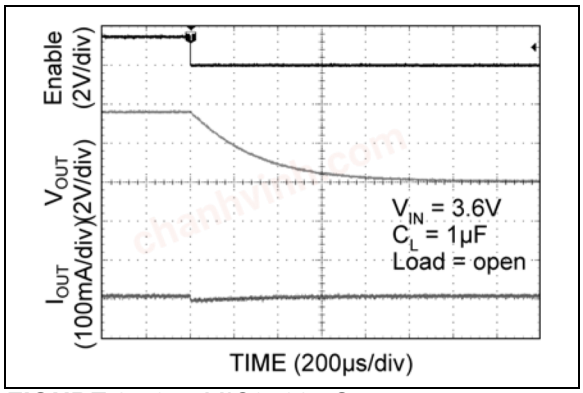


FIGURE 2-59: *MIC94085 Scope 5.*

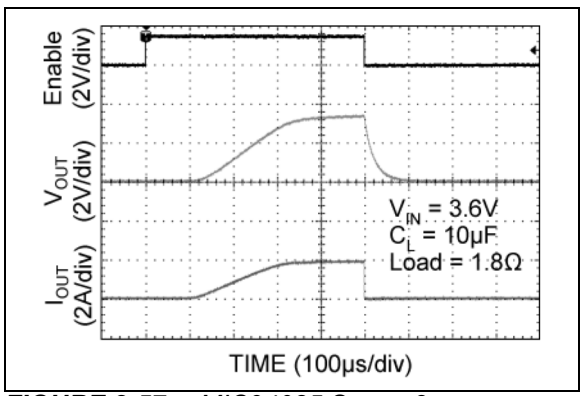


FIGURE 2-57: *MIC94085 Scope 3.*

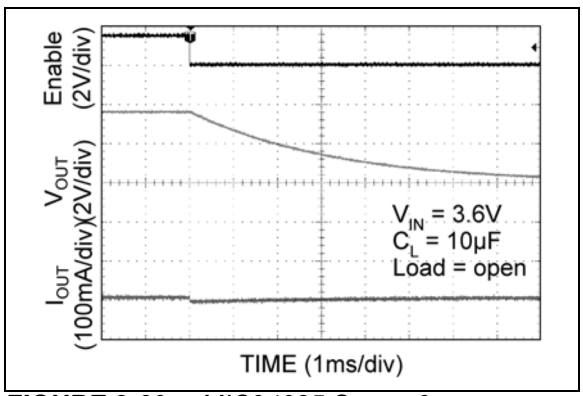


FIGURE 2-60: *MIC94085 Scope 6.*

chanhvinh.com

3.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in Table 3-1.

TABLE 3-1: PIN FUNCTION TABLE

Pin Number	Pin Name	Description
1	V_{OUT}	Drain of P-Channel MOSFET.
2	GND	Ground. Should be connected to electrical ground.
3	V_{IN}	Source of P-Channel MOSFET.
4	EN	Enable (Input): Active-high CMOS/TTL control input for switch. Internal ~2 MΩ pull-down resistor. Output will be off if this pin is left floating.

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

4.0 APPLICATION INFORMATION

4.1 Power Switch SOA

The safe operating area (SOA) curve represents the boundary of maximum safe operating current and maximum safe operating junction temperature.

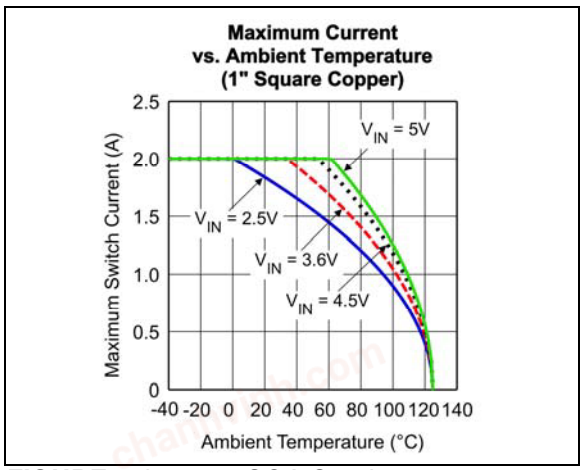


FIGURE 4-1: *SOA Graph.*

The curves above show the SOA for various V_{IN} values mounted on a typical one-layer, 1 square inch copper board.

4.2 Power Dissipation Considerations

As with all power switches, the current rating of the switch is limited mostly by the thermal properties of the package and the PCB on which it's mounted. There is a simple Ohm's law type relationship between thermal resistance, power dissipation, and temperature that are analogous to an electrical circuit.

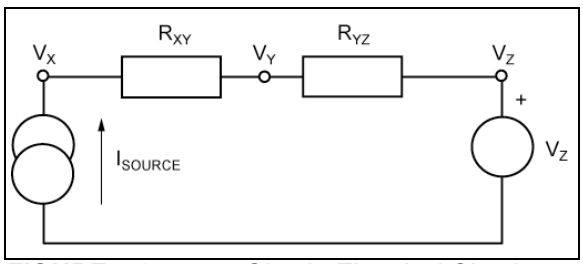


FIGURE 4-2: *Simple Electrical Circuit.*

From this simple circuit, one can calculate V_X if one knows I_{SOURCE}, V_Z, and the resistor values for R_{XY} and R_{YZ} using Equation 4-1.

EQUATION 4-1:

$$V_X = I_{SOURCE} \times (R_{XY} + R_{YZ}) + V_Z$$

Thermal circuits can be considered using these same rules and can be drawn similarly by replacing current sources with power dissipation (in Watts), resistance with thermal resistance (in °C/W), and voltage sources with temperature (in °C).

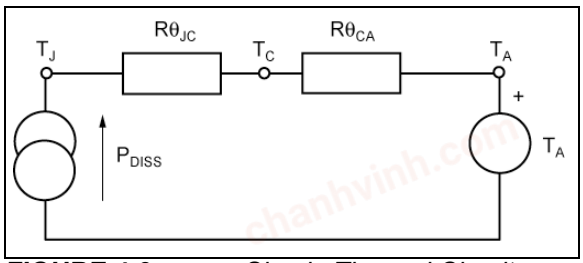


FIGURE 4-3: *Simple Thermal Circuit.*

By replacing the variables in the equation for V_X, one can find the junction temperature (T_J) from power dissipation, ambient temperature, and then know thermal resistance of the PCB ($R\theta_{CA}$) and the package ($R\theta_{JC}$).

EQUATION 4-2:

$$T_J = P_{DISS} \times (R\theta_{JC} + R\theta_{CA}) + T_A$$

P_{DISS} is calculated as I_{SWITCH}^2 x $R_{SW(MAX)}$. $R\theta_{JC}$ is found in the Temperature Specifications section of this data sheet and $R\theta_{CA}$ (the PCB thermal resistance) values for various PCB copper areas is discussed in Designing with Low Dropout Voltage Regulators.

4.2.1 AN EXAMPLE

A switch is intended to drive a 1A load and is placed on a PCB that has a ground plane area of at least 25 mm by 25 mm (625 mm^2). The voltage source is a Li-ion battery with a lower operating threshold of 3V and the ambient temperature of the assembly can be up to 50°C.

Summary of variables:

- I_{SW} = 1A
- V_{IN} = 3V to 4.2V
- T_A = 50°C
- $R\theta_{JC}$ = 85°C/W
- $R\theta_{CA}$ = 53°C/W (as read from Figure 4-4)

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

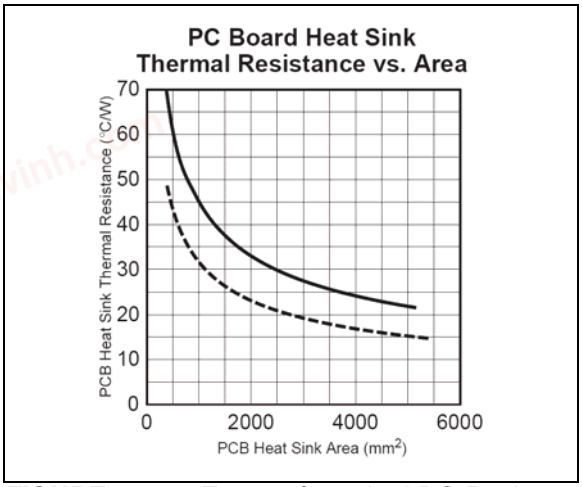


FIGURE 4-4: *Excerpt from the LDO Book.*

EQUATION 4-3:

$$P_{DISS} = I_{SW}^{2} \times R_{SW(MAX)}$$

The worst case switch resistance ($R_{SW(MAX)}$) at the lowest V_{IN} of 3V is not available in the data sheet, so the next lowest value of V_{IN} is used.

$R_{SW(MAX)}$ at 2.5V is 200 mΩ.

An additional consideration is to allow for the maximum junction temperature of 125°C. If this was a calculation for the worst case $R_{SW(MAX)}$ for 25°C, the actual worst case resistance in this case can be 30% higher (see Figure 2-1). However, 200 mΩ is the maximum over temperature. Therefore:

EQUATION 4-4:

$$T_J = 1^2 \times 0.2 \times (85 + 53) + 50 = 78°C$$

This is below the maximum of 125°C.


© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

5.0 PACKAGING INFORMATION

5.1 Package Marking Information

4-Lead UDFN*



Example




TABLE 5-1: MARKING CODES

Part Number	Marking Code	Features
MIC94080YFT-TR	C1	Fast Turn-On
MIC94081YFT-TR	C2	Fast Turn-On, Load Discharge
MIC94082YFT-TR	C5	800 µs Soft-Start
MIC94083YFT-TR	C7	800 µs Soft-Start, Load Discharge
MIC94084YFT-TR	C0	120 µs Soft-Start
MIC94085YFT-TR	1C	120 µs Soft-Start, Load Discharge

Legend:

XX...X	Product code or customer-specific information
Y	Year code (last digit of calendar year)
YY	Year code (last 2 digits of calendar year)
WW	Week code (week of January 1 is week ‘01’)
NNN	Alphanumeric traceability code
(e3)	Pb-free JEDEC® designator for Matte Tin (Sn)
*	This package is Pb-free. The Pb-free JEDEC designator ((e3)) can be found on the outer packaging for this package.
●, ▲, ▼	Pin one index is identified by a dot, delta up, or delta down (triangle mark).

Note: In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. Package may or may not include the corporate logo.


Underbar (_) and/or Overbar (¯) symbol may not be to scale.

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

4-Lead Ultra Thin Plastic Dual Flat, No Lead Package (HBA) - 0.85x0.85x0.6 mm Body [UDFN]; Micrel Legacy Package FTMLF085085D-04L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

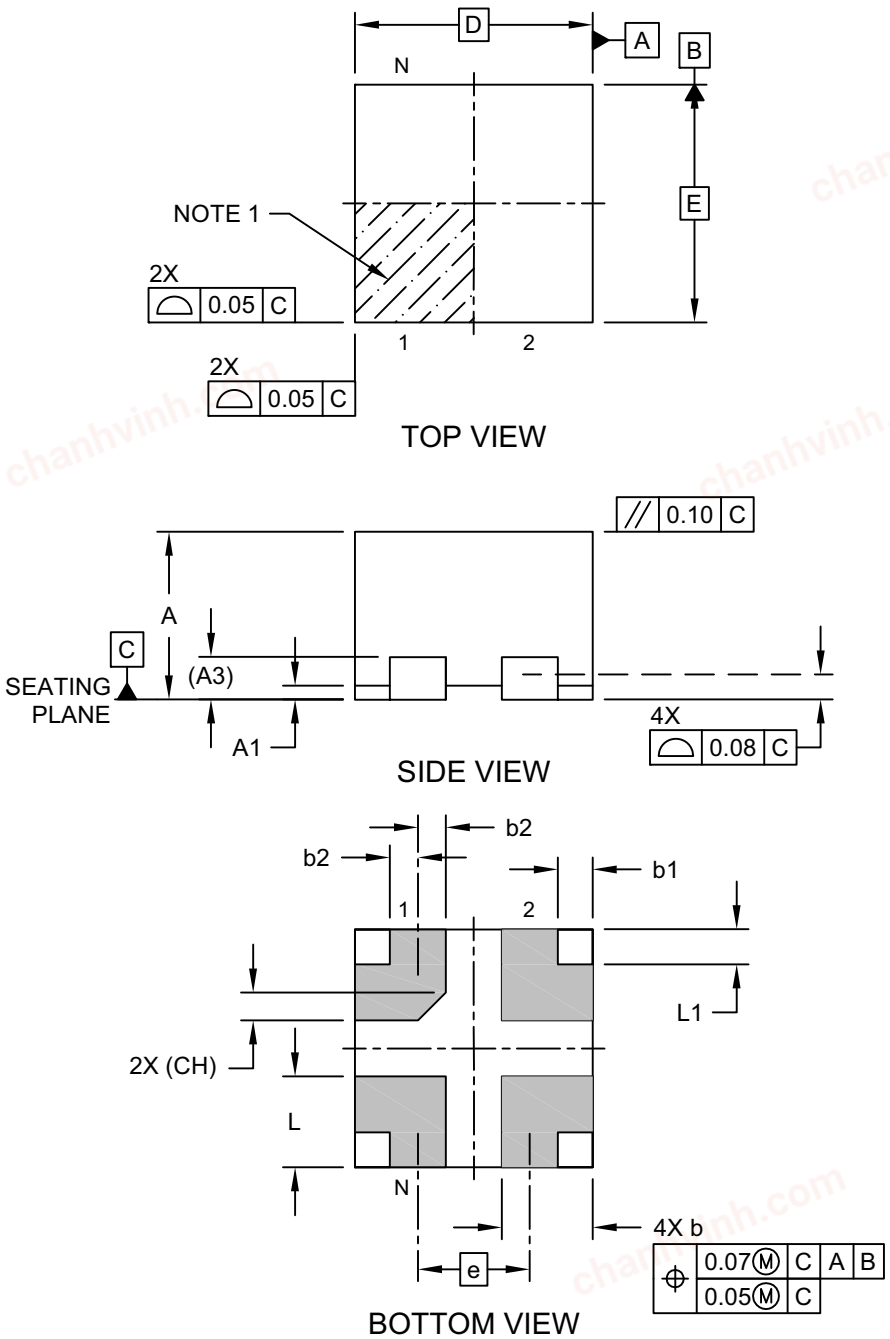


Microchip Technology Drawing C04-1043 Rev A Sheet 1 of 2

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

4-Lead Ultra Thin Plastic Dual Flat, No Lead Package (HBA) - 0.85x0.85x0.6 mm Body [UDFN]; Micrel Legacy Package FTMLF085085D-04L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

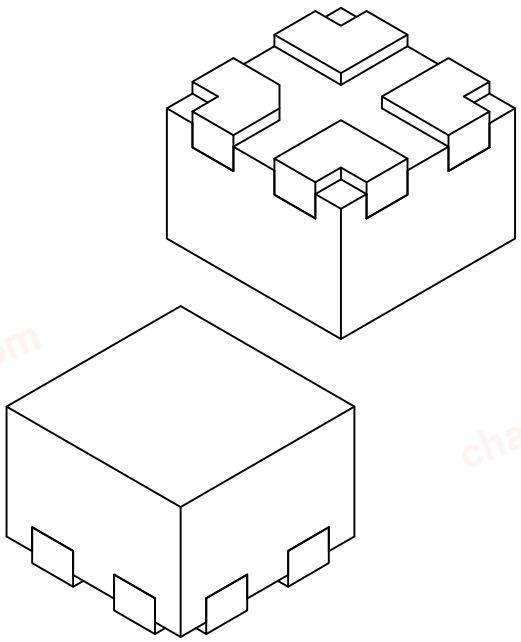

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N		4	
Pitch	e		0.40 BSC	
Overall Height	A	0.50	0.55	0.60
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3		0.152 REF	
Overall Length	D		0.85 BSC	
Overall Width	E		0.85 BSC	
Terminal Width	b	0.275	0.325	0.375
Terminal Length	L	0.275	0.325	0.375
Terminal Notch	b1	0.075	0.125	0.175
Terminal Length	b2	0.15	0.20	0.25
Terminal Notch	L1	0.075	0.125	0.175
Terminal 1 Index Chamfer	CH		0.10 REF	

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

   REF: Reference Dimension, usually without tolerance, for information purposes only.


Microchip Technology Drawing C04-1043 Rev A Sheet 2 of 2

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

4-Lead Ultra Thin Plastic Dual Flat, No Lead Package (HBA) - 0.85x0.85x0.6 mm Body [UDFN]; Micrel Legacy Package FTMLF085085D-04L

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

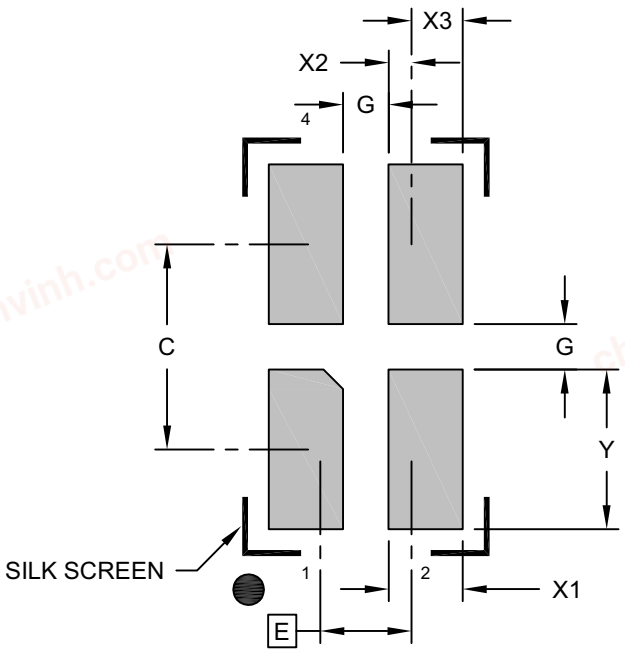

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Terminal Pitch	E		0.40 BSC	
Contact Pad Spacing	C		0.90	
Contact Pad Width (Xnn)	X1			0.33
Contact Pad Length (Xnn)	Y			0.70
Contact Pad Offset	X2		0.10	
Contact Pad Offset	X3		0.23	
Contact Pad to Contact Pad (Xnn)	G	0.20		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-3043 Rev A

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

APPENDIX A: REVISION HISTORY

Revision B (February 2026)

- Updated the Package Type from FTDFN to UDFN throughout the document.
- Updated Package Outline Drawing in **Section 5.0 "Packaging Information"**.

Revision A (March 2019)

- Converted Micrel document MIC94080/1/2/3/4/5 to Microchip data sheet template DS20006118A.
- Minor grammatical text changes throughout.

chanhvinh.com

chanhvinh.com

NOTES:

chanhvinh.com

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, contact your local Microchip representative or sales office.

Device	X	XX	-XX
Part No.	Junction Temp. Range	Package	Media Type

Device:	MIC94080:	67 mΩ $R_{DS(ON)}$ 2A High-Side Load Switch with Fast Turn-On
	MIC94081:	67 mΩ $R_{DS(ON)}$ 2A High-Side Load Switch with Fast Turn-On and Load Discharge
	MIC94082:	67 mΩ $R_{DS(ON)}$ 2A High-Side Load Switch with 800 µs Soft-Start
	MIC94083:	67 mΩ $R_{DS(ON)}$ 2A High-Side Load Switch with 800 µs Soft-Start and Load Discharge
	MIC94084:	67 mΩ $R_{DS(ON)}$ 2A High-Side Load Switch with 120 µs Soft-Start
	MIC94085:	67 mΩ $R_{DS(ON)}$ 2A High-Side Load Switch with 120 µs Soft-Start and Load Discharge
Junction Temperature Range:	Y =	–40°C to +125°C, RoHS-Compliant
Package:	FT =	4-Lead 0.85 mm x 0.85 mm UDFN
Media Type:	TR =	5,000/Reel

Examples:

a) MIC94080YFT-TR: MIC94080, –40°C to +125°C Temperature Range, 4-Lead UDFN, 5,000/Reel

b) MIC94081YFT-TR: MIC94081, –40°C to +125°C Temperature Range, 4-Lead UDFN, 5,000/Reel

c) MIC94082YFT-TR: MIC94082, –40°C to +125°C Temperature Range, 4-Lead UDFN, 5,000/Reel

d) MIC94083YFT-TR: MIC94083, –40°C to +125°C Temperature Range, 4-Lead UDFN, 5,000/Reel

e) MIC94084YFT-TR: MIC94084, –40°C to +125°C Temperature Range, 4-Lead UDFN, 5,000/Reel

f) MIC94085YFT-TR: MIC94085, –40°C to +125°C Temperature Range, 4-Lead UDFN, 5,000/Reel

Note 1: Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

NOTES:

chanhvinh.com

© 2019-2026 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

Microchip Information

Trademarks

The “Microchip” name and logo, the “M” logo, and other names, logos, and brands are registered and unregistered trademarks of Microchip Technology Incorporated or its affiliates and/or subsidiaries in the United States and/or other countries (“Microchip Trademarks”). Information regarding Microchip Trademarks can be found at https://www.microchip.com/en-us/about/legal-information/microchip-trademarks.

ISBN: 979-8-3371-2847-4

Legal Notice

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at www.microchip.com/en-us/support/design-help/client-support-services.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Microchip Devices Code Protection Feature

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is “unbreakable”. Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.