chanhvinh.com

MIC94090/1/2/3/4/5

High Side Load Switches for Consumer Applications

Features

- 1.7V to 5.5V Input Voltage Range
- 1.2A Continuous Operating Current
- 130 mΩ $R_{DS(ON)}$
- Internal Level Shift for CMOS/TTL Control Logic
- Ultra-Low Quiescent Current
- Micro-Power Shutdown Current
- Rapid Turn-On: MIC94090/1
- Soft-Start: MIC94092/3 (790 µs), MIC94094/5 (120 µs)
- Load Discharge Circuit: MIC94091/3/5
- Space Saving and Thermally Capable 1.25 mm x 1.25 mm UDFN Package
- Industry Standard SC-70-6 Package

Applications

- Cellular Phones
- Portable Navigation Devices (PND)
- GPS Modules
- Personal Media Players (PMP)
- Ultra Mobile PCs
- Other Portable Applications
- PDAs
- Portable Instrumentation
- Industrial and DataComm Equipment

General Description

The MIC94090/1/2/3/4/5 is a family of high-side load switches designed for operation from 1.7V to 5.5V input voltage. The load switch pass element is an internal 130 mΩ $R_{DS(ON)}$ P-channel MOSFET which enables each device to support up to 1.2A continuous current. Additionally, the load switch supports 1.5V logic level control and shutdown features.

The MIC94090 and MIC94091 feature rapid turn on. The MIC94092 and MIC94093 provide a slew rate controlled soft-start turn-on of 790 µs, while the MIC94094 and MIC94095 provide a slew rate controlled soft-start turn-on of 120 µs. The soft-start feature option prevents an in-rush current event from pulling down the input supply voltage.

The MIC94091, MIC94093, and MIC94095 include a 250Ω auto discharge load circuit that is switched on when the load switch is disabled.


An active pull-down on the enable input keeps MIC94090/1/2/3/4/5 devices in a default OFF state until the enable pin is pulled above 1.25V. Internal level shift circuitry allows low voltage logic signals to switch higher supply voltages. The enable voltage can be as high as 5.5V and is not limited by the input voltage.

The MIC94090/1/2/3/4/5 device family's operating voltage range makes them ideal for Lithium ion as well as both NiMH, NiCad, and Alkaline battery powered systems and non-battery powered applications. The devices provide low quiescent current and low shutdown current to maximize battery life.

Package Types


6-Lead SC-70-6 (C6)

(Top View)

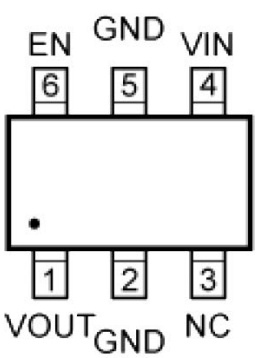

4-Lead UDFN (MT)

(Top View)

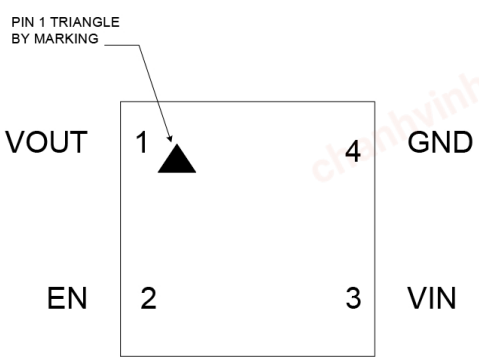


© 2022 - 2024 Microchip Technology Inc. and its subsidiaries


chanhvinh.com

Typical Application Circuits

MIC94090 (Ultra-Fast Turn On)
MIC94092 (790 µs Soft-Start)
MIC94094 (120 µs Soft-Start)

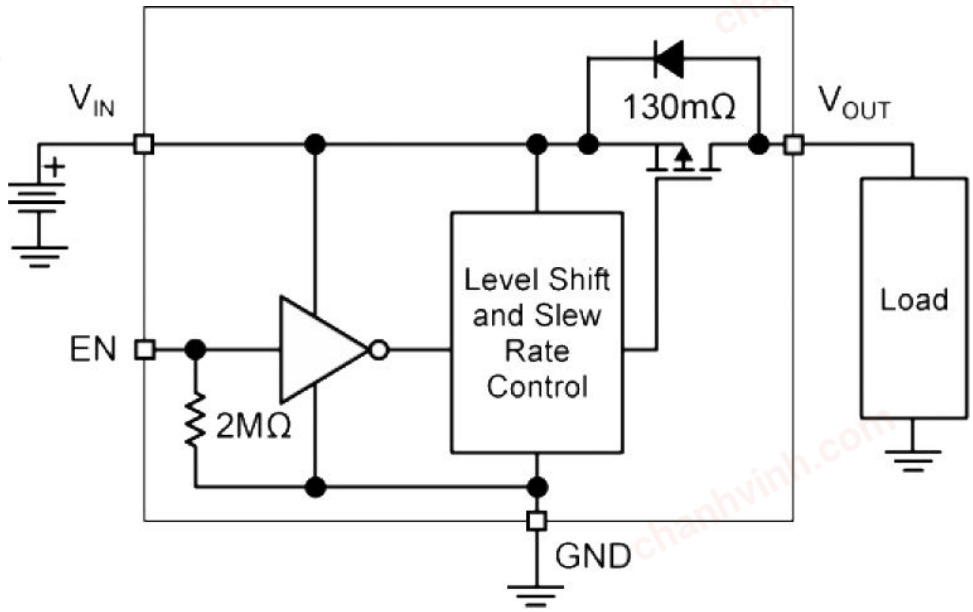

MIC94091 (Ultra-Fast Turn On with Auto-Discharge)
MIC94093 (790 µs Soft-Start with Auto-Discharge)
MIC94095 (120 µs Soft-Start with Auto-Discharge)

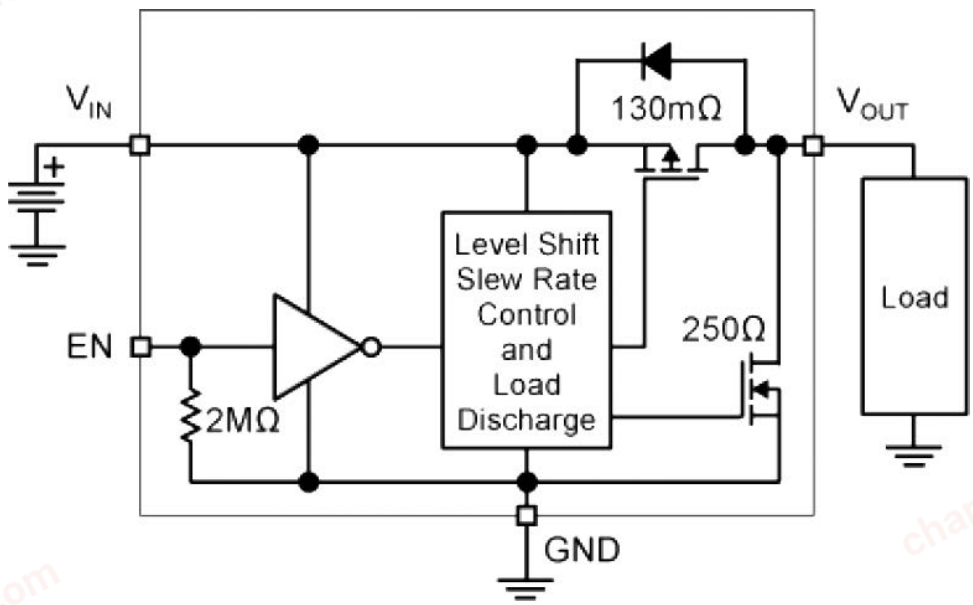

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

1.0 ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings †

Input Voltage (V_{IN}) ..... +6V
Enable Voltage (V_{EN}) ..... +6V
Continuous Drain Current (I_D) (Note 1)
T_A = 25°C (UDFN) ..... ±1.2A
T_A = 25°C (SC-70-6) ..... ±1.2A
Pulsed Drain Current (I_{DP}) (Note 2) ..... ±6.0A
Continuous Diode Current (I_S) (Note 3) ..... -50 mA
ESD Rating – HBM (Note 4) ..... 3 kV

Operating Ratings ‡

Input Voltage (V_{IN}) ..... +1.7 to +5.5V

† Notice: Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational sections of this specification is not intended. Exposure to maximum rating conditions for extended periods may affect device reliability.

‡ Notice: The device is not guaranteed to function outside its operating ratings.

Note 1: With backside thermal contact to PCB.

2: Pulse width < 300 µs with < 2% duty cycle.

3: Continuous body diode current conduction (reverse conduction, i.e. V_{OUT} to V_{IN}) is not recommended.

4: Devices are ESD sensitive. Handling precautions recommended. HBM (Human body model), 1.5 kΩ in series with 100 pF.

ELECTRICAL CHARACTERISTICS

T_A = 25°C, **bold** values indicate -40°C < T_A < +85°C, unless noted.

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Enable Threshold Voltage	V_{EN_TH}	**0.4**	—	**1.25**	V	V_{IN} = 1.7V to 4.5V, I_D = -250 µA
Quiescent Current Measured on the V_{IN} Pin	I_Q	—	0.1	1	µA	V_{IN} = V_{EN} = 5.5V, I_D = OPEN Measured on V_{IN} MIC94090/1
		—	8	15	µA	V_{IN} = V_{EN} = 5.5V, I_D = OPEN Measured on V_{IN} MIC94092/3/4/5
Enable Input Current	I_{EN}	—	2.5	4	µA	V_{IN} = V_{EN} = 5.5V, I_D = OPEN
Shutdown Current	I_{SD}	—	0.01	1	µA	V_{IN} = +5.5V, V_{EN} = 0V, I_D = OPEN Measured on the V_{IN} pin (Note 1)
OFF State Leakage Current	$I_{SHUT-SWITCH}$	—	0.01	1	µA	V_{IN} = +5.5V, V_{EN} = 0V, I_D = SHORT, measured on V_{OUT} (Note 1)

Note 1: Measured on the MIC94090YMT.

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

ELECTRICAL CHARACTERISTICS (CONTINUED)

T_A = 25°C, **bold** values indicate -40°C < T_A < +85°C, unless noted.

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
P-Channel Drain to Source ON Resistance	$R_{DS(ON)}$	—	130	225	mΩ	V_{IN} = +5.0V, I_D = -100 mA, V_{EN} = 1.5V
		—	135	235	mΩ	V_{IN} = +4.5V, I_D = -100 mA, V_{EN} = 1.5V
		—	140	255	mΩ	V_{IN} = +3.6V, I_D = -100 mA, V_{EN} = 1.5V
		—	170	315	mΩ	V_{IN} = +2.5V, I_D = -100 mA, V_{EN} = 1.5V
		—	235	355	mΩ	V_{IN} = +1.8V, I_D = -100 mA, V_{EN} = 1.5V
		—	260	375	mΩ	V_{IN} = +1.7V, I_D = -100 mA, V_{EN} = 1.5V
Turn-Off Resistance	$R_{SHUT-DOWN}$	—	250	400	Ω	V_{IN} = +3.6V, I_{TEST} = 1 mA, V_{EN} = 0V, MIC94091/3/5
Turn-On Delay Time	t_{ON_DLY}	—	0.4	1.5	µs	V_{IN} = +3.6V, I_D = -100 mA, V_{EN} = 1.5V, MIC94090/1
		200	740	1500	µs	V_{IN} = +3.6V, I_D = -100 mA, V_{EN} = 1.5V, MIC94092/3
		65	110	165	µs	V_{IN} = +3.6V, I_D = -100 mA, V_{EN} = 1.5V, MIC94094/5
Turn-On Rise Time	t_{ON_RISE}	—	0.4	1.5	µs	V_{IN} = +3.6V, I_D = -100 mA, V_{EN} = 1.5V, MIC94090/1
		400	790	1500	µs	V_{IN} = +3.6V, I_D = -100 mA, V_{EN} = 1.5V, MIC94092/3
		65	120	175	µs	V_{IN} = +3.6V, I_D = -100 mA, V_{EN} = 1.5V, MIC94094/5
Turn-Off Delay Time	t_{OFF_DLY}	—	60	200	ns	V_{IN} = +3.6V, I_D = -100 mA, V_{EN} = 1.5V
Turn-Off Fall Time	t_{OFF_FALL}	—	10	100	ns	V_{IN} = +3.6V, I_D = -100 mA, V_{EN} = 1.5V

Note 1: Measured on the MIC94090YMT.

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

TEMPERATURE SPECIFICATIONS (Note 1)

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
Temperature Ranges						
Operating Junction Temperature Range	T_J	-40	—	+125	°C	—
Maximum Junction Temperature	$T_{J(MAX)}$	—	—	+125	°C	—
Storage Temperature	T_S	-55	—	+150	°C	—
Package Thermal Resistance						
Package Thermal Resistance, 4-Lead UDFN (Note 2)	θ_{JC}	—	60	—	°C/W	—
Package Thermal Resistance, 4-Lead UDFN (Note 2)	θ_{JA}	—	140	—	°C/W	—
Package Thermal Resistance, SC-70-6	θ_{JC}	—	100	—	°C/W	—
Package Thermal Resistance, SC-70-6	θ_{JA}	—	240	—	°C/W	—

Note 1: The maximum allowable power dissipation is a function of ambient temperature, the maximum allowable junction temperature and the thermal resistance from junction to air (i.e., T_A, T_J, θ_{JA}). Exceeding the maximum allowable power dissipation will cause the device operating junction temperature to exceed the maximum rating. Sustained junction temperatures above that maximum can impact device reliability.

2: With backside thermal contact to PCB.

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

2.0 TYPICAL PERFORMANCE CURVES

Note: The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

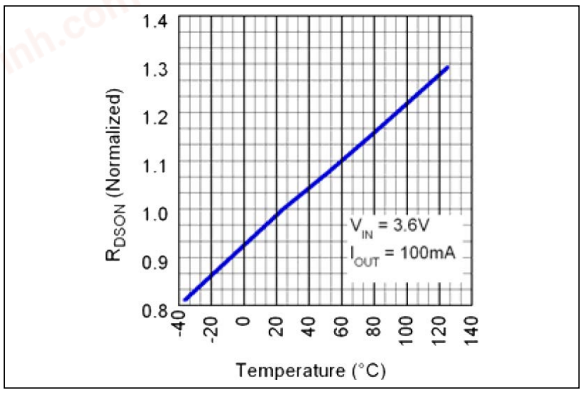


FIGURE 2-1: *R_{DSON} Variance vs. Temperature.*

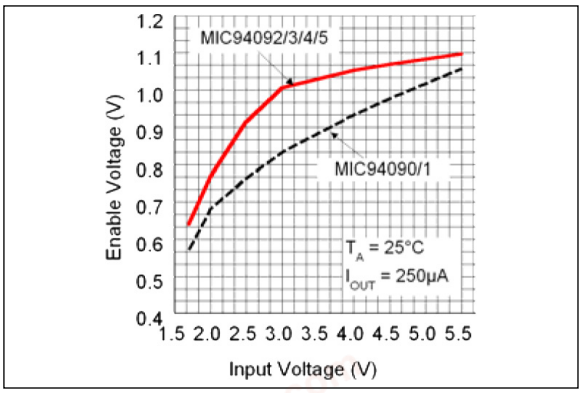


FIGURE 2-4: *Enable Threshold vs. Input Voltage.*

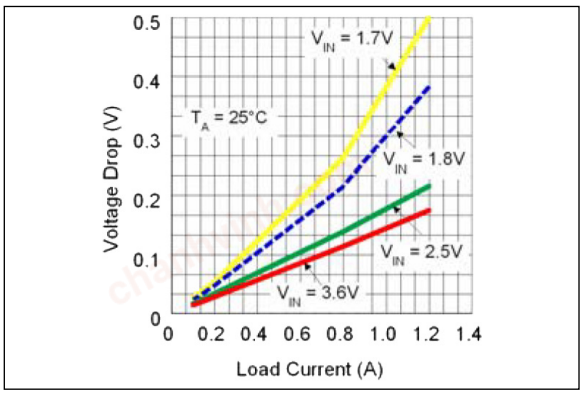


FIGURE 2-2: *Voltage Drop vs. Load Current.*

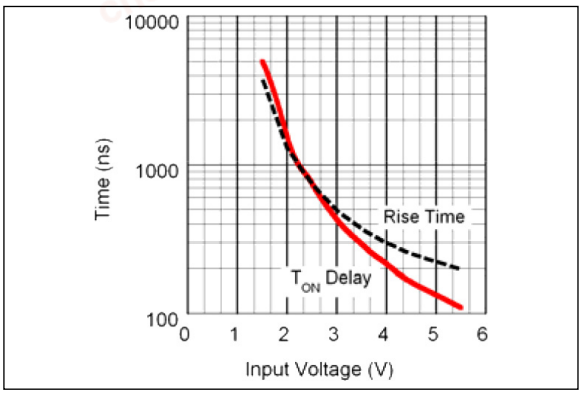


FIGURE 2-5: *MIC94090/1 t_{ON} Delay/Rise Time vs. Input Voltage.*

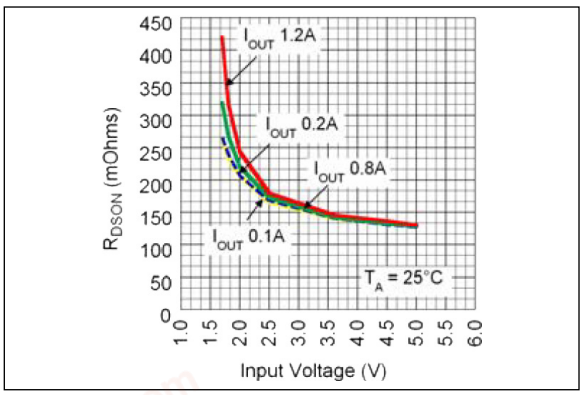


FIGURE 2-3: *On Resistance vs. Input Voltage.*

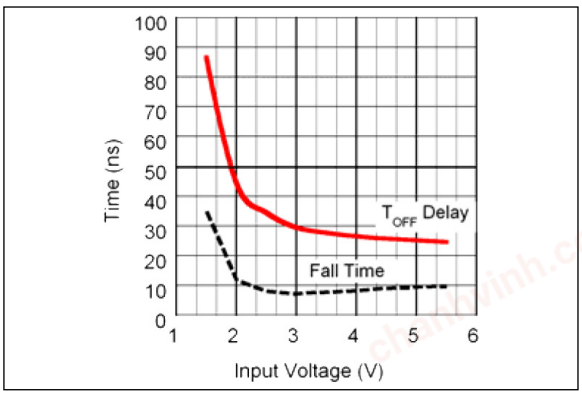


FIGURE 2-6: *MIC94090/1 t_{OFF} Delay/Fall Time vs. Input Voltage.*

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

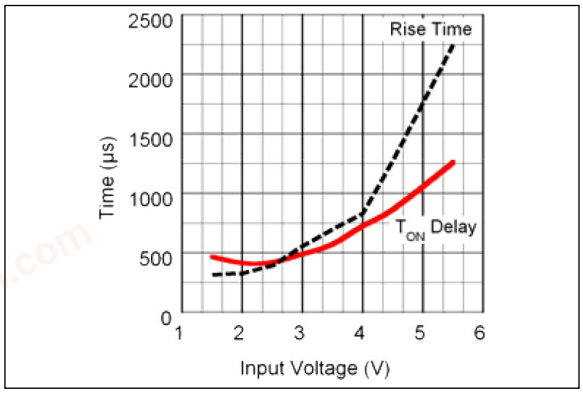


FIGURE 2-7: *MIC94092/3 t_{ON} Delay/Rise Time vs. Input Voltage.*

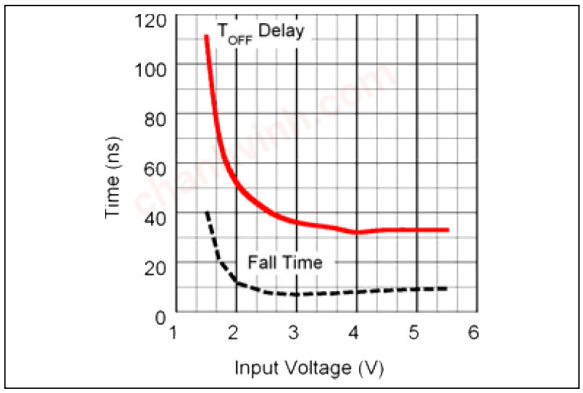


FIGURE 2-10: *MIC94094/5 t_{OFF} Delay/Fall Time vs. Input Voltage.*

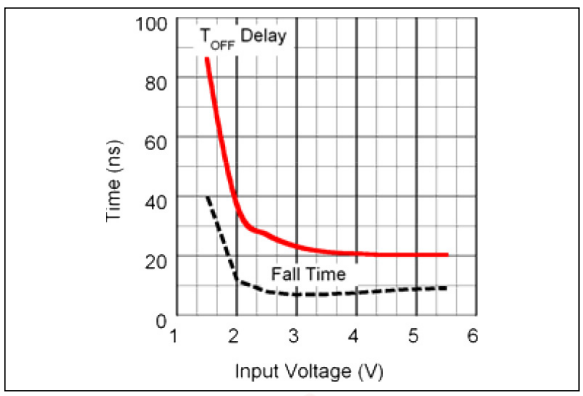


FIGURE 2-8: *MIC94092/3 t_{OFF} Delay/Fall Time vs. Input Voltage.*

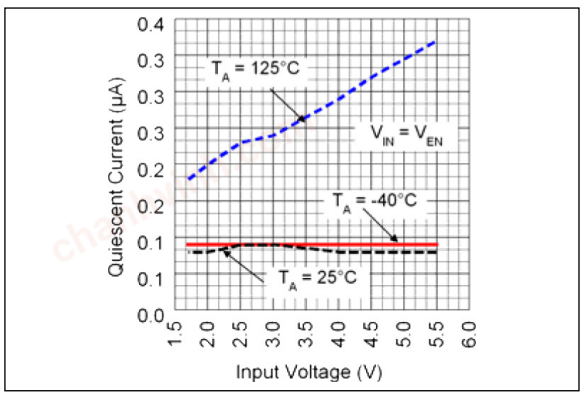


FIGURE 2-11: *MIC94090/1 Quiescent Current vs. Input Voltage.*

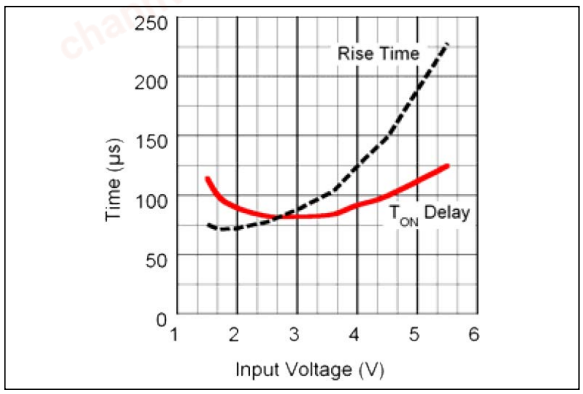


FIGURE 2-9: *MIC94094/5 t_{ON} Delay/Rise TIme vs. Input Voltage.*

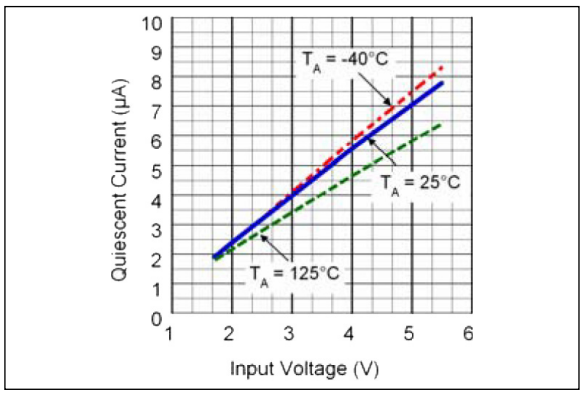


FIGURE 2-12: *MIC94092/3/4/5 Quiescent Current vs. Input Voltage.*

chanhvinh.com

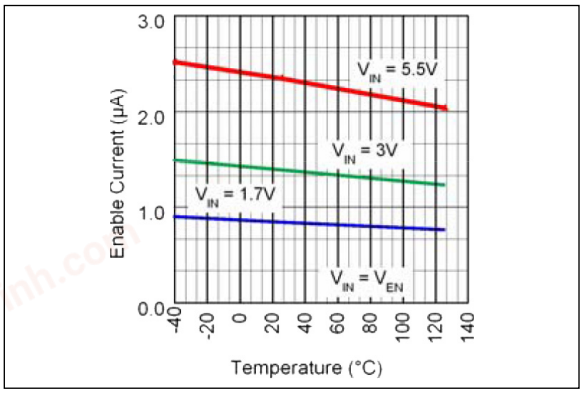


FIGURE 2-13: *MIC94090/1/2/3/4/5 Enable Current vs. Temperature.*

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

3.0 FUNCTIONAL CHARACTERISTICS

Note: The scopes provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some scopes, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

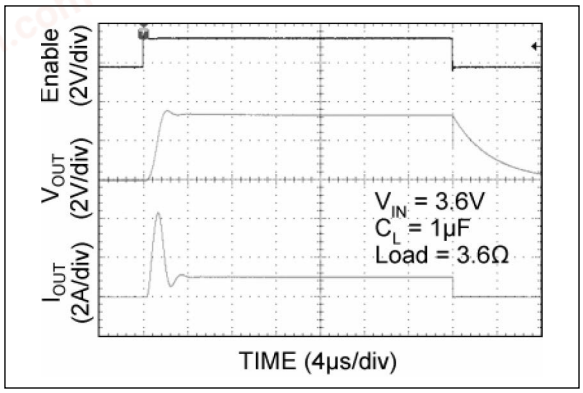


FIGURE 3-1: *MIC94090.*

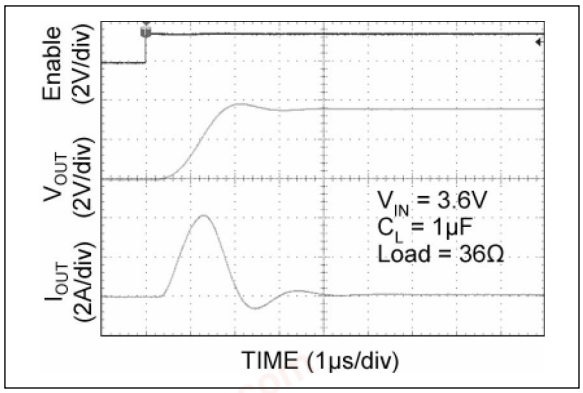


FIGURE 3-4: *MIC94090.*

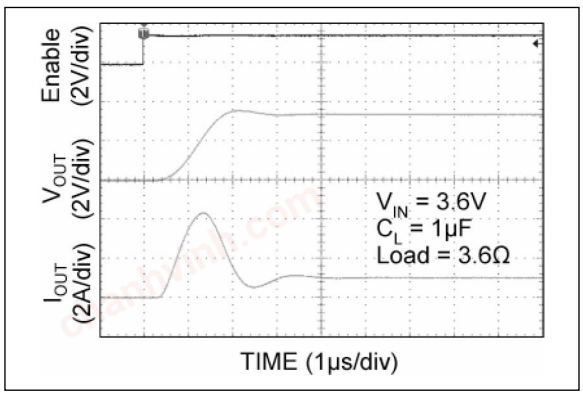


FIGURE 3-2: *MIC94090.*

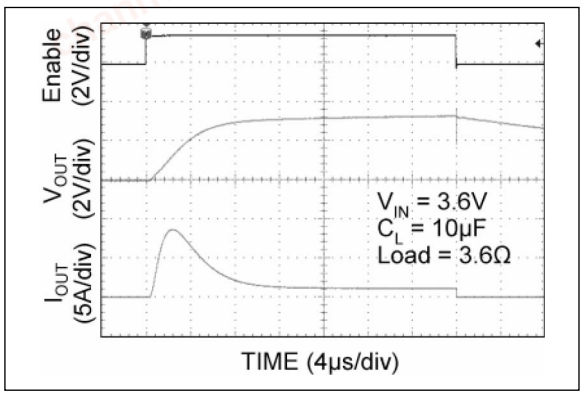


FIGURE 3-5: *MIC94090.*

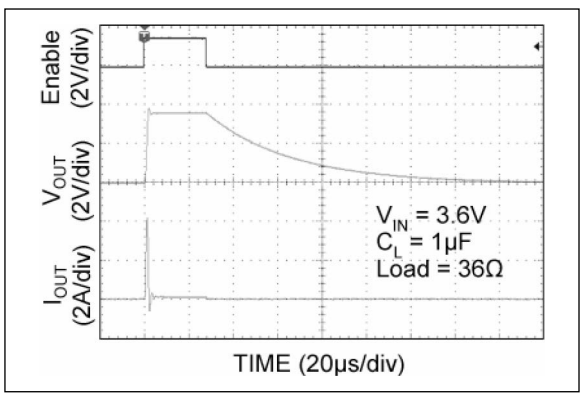


FIGURE 3-3: *MIC94090.*

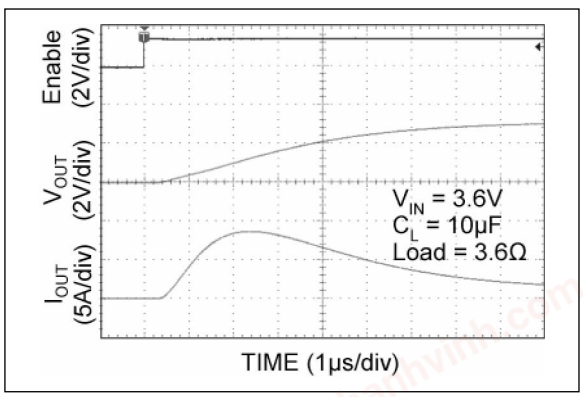


FIGURE 3-6: *MIC94090.*

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

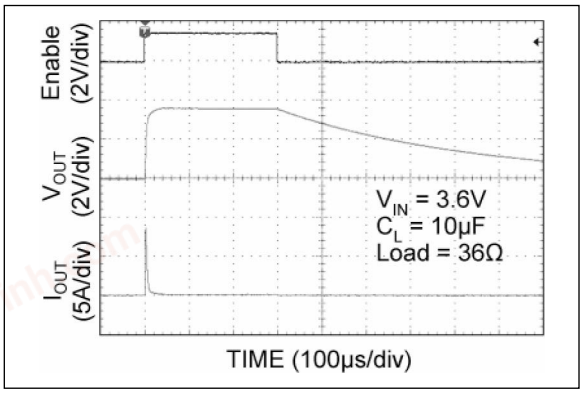


FIGURE 3-7: *MIC94090.*

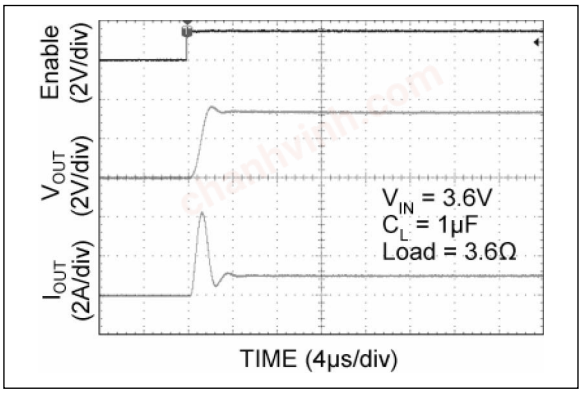


FIGURE 3-10: *MIC94091.*

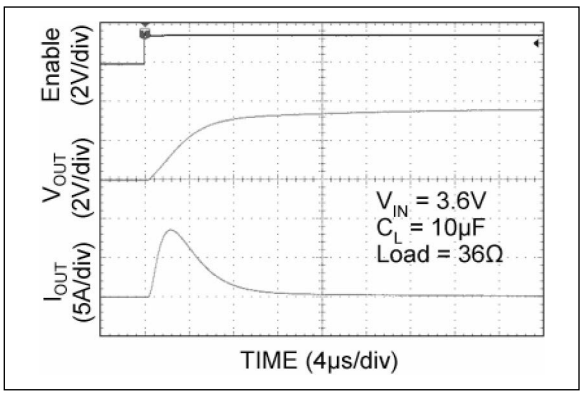


FIGURE 3-8: *MIC94090.*

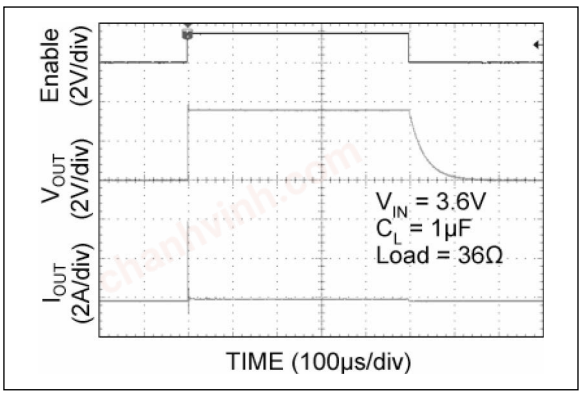


FIGURE 3-11: *MIC94091.*

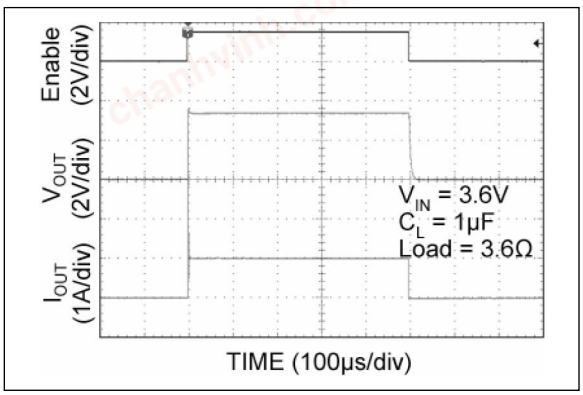


FIGURE 3-9: *MIC94091.*

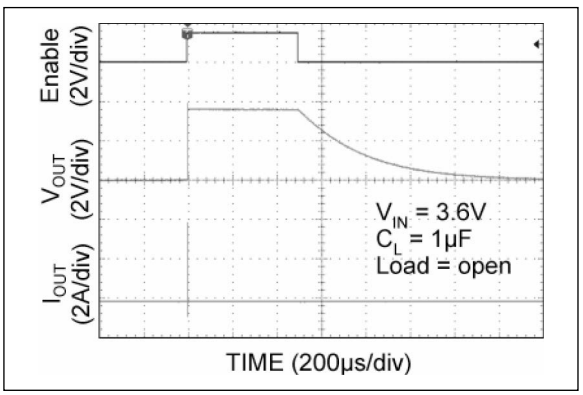


FIGURE 3-12: *MIC94091.*

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

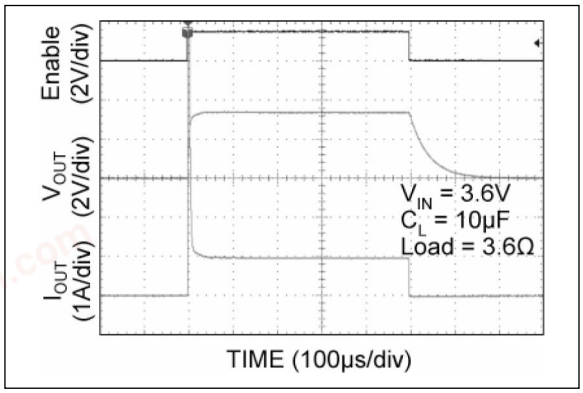


FIGURE 3-13: *MIC94091.*

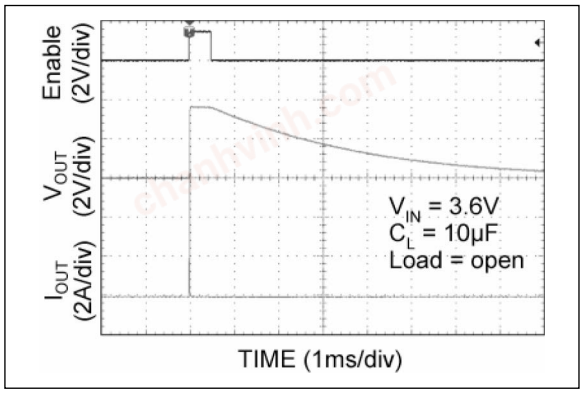


FIGURE 3-16: *MIC94091.*

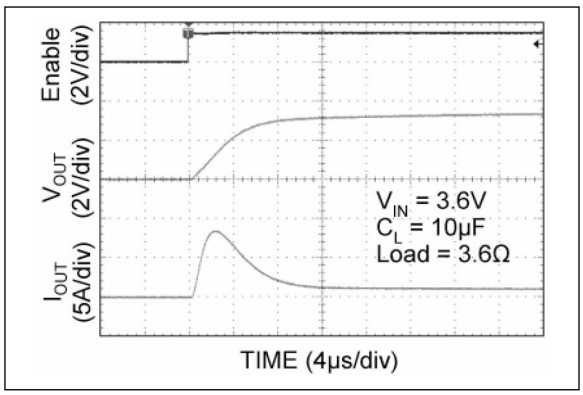


FIGURE 3-14: *MIC94091.*

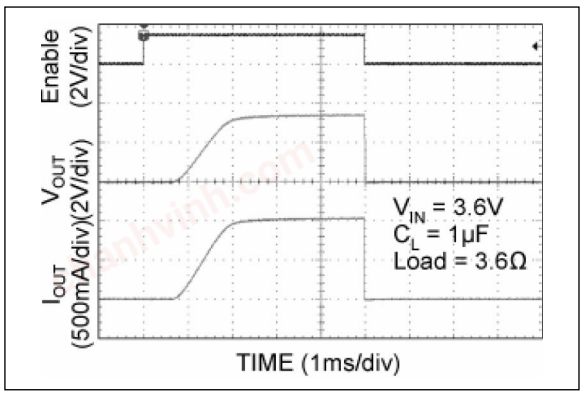


FIGURE 3-17: *MIC94092.*

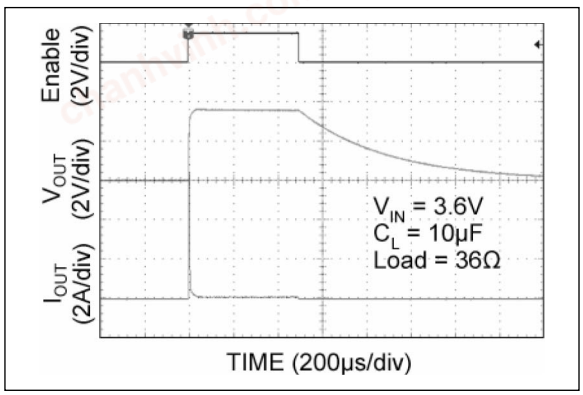


FIGURE 3-15: *MIC94091.*

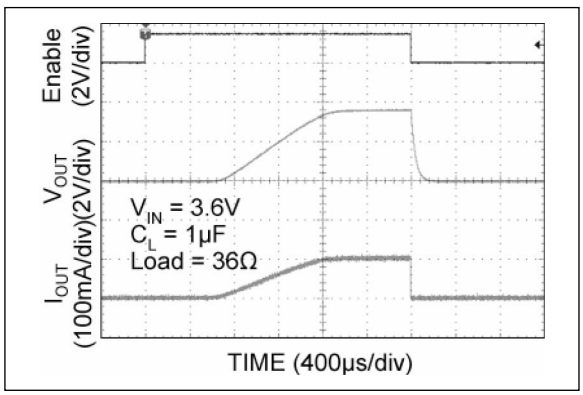


FIGURE 3-18: *MIC94092.*

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

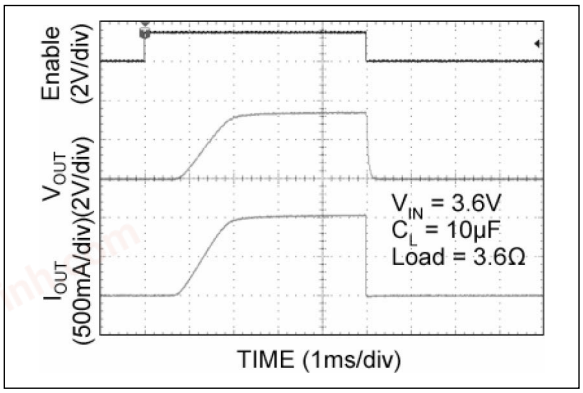


FIGURE 3-19: *MIC94092.*

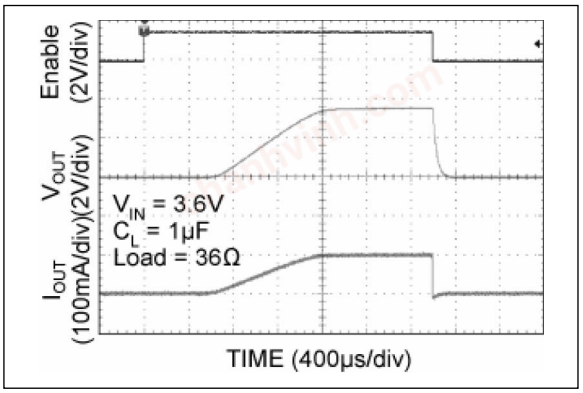


FIGURE 3-22: *MIC94093.*

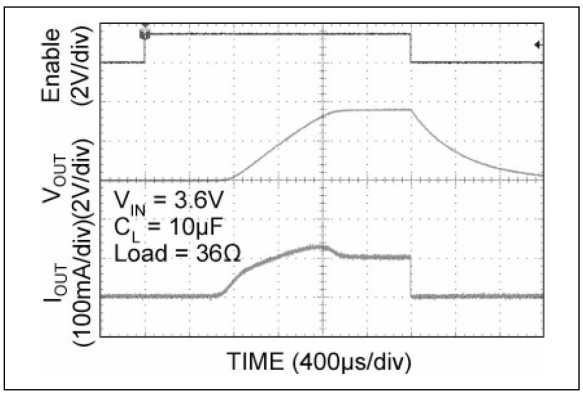


FIGURE 3-20: *MIC94092.*

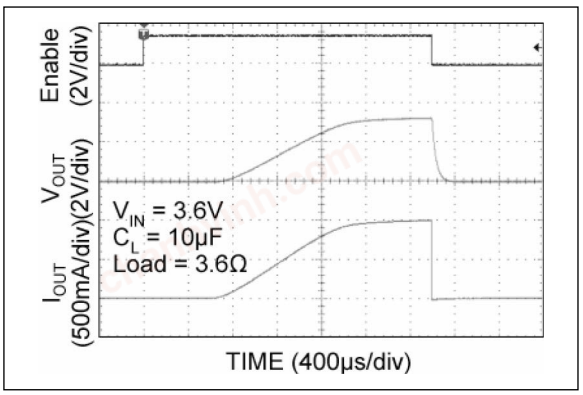


FIGURE 3-23: *MIC94093.*

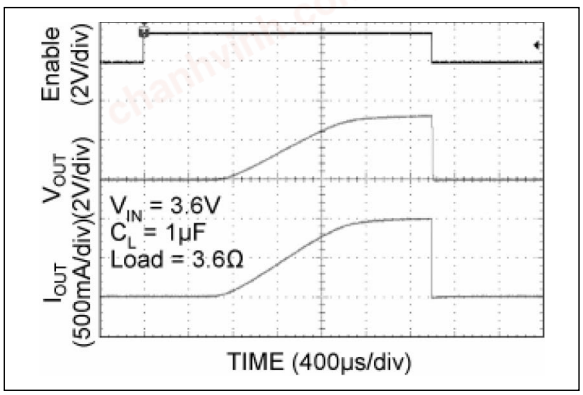


FIGURE 3-21: *MIC94093.*

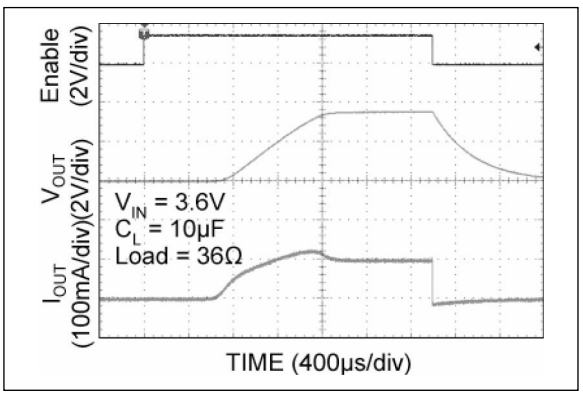


FIGURE 3-24: *MIC94093.*

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

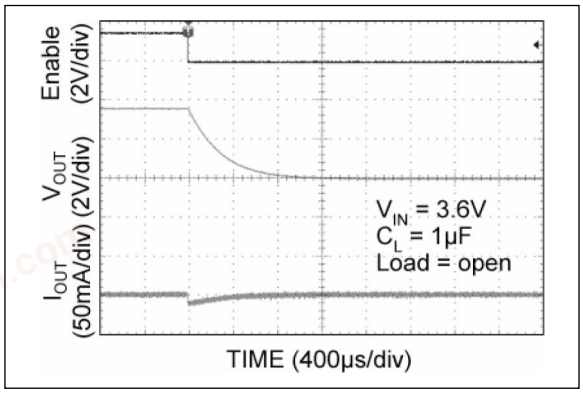


FIGURE 3-25: *MIC94093.*

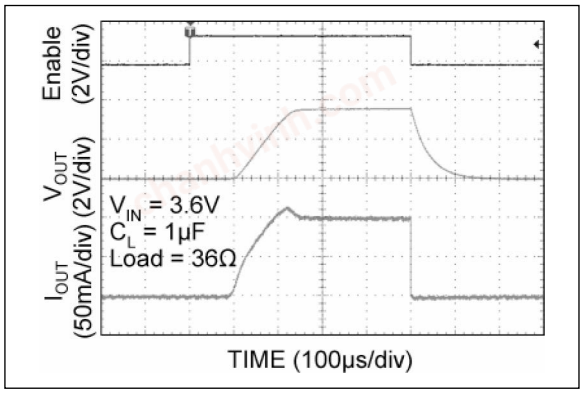


FIGURE 3-28: *MIC94094.*

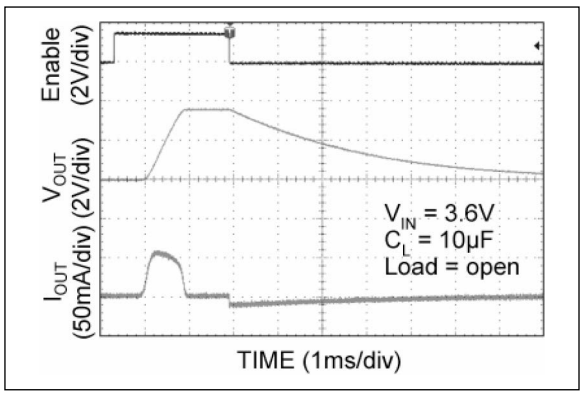


FIGURE 3-26: *MIC94093.*

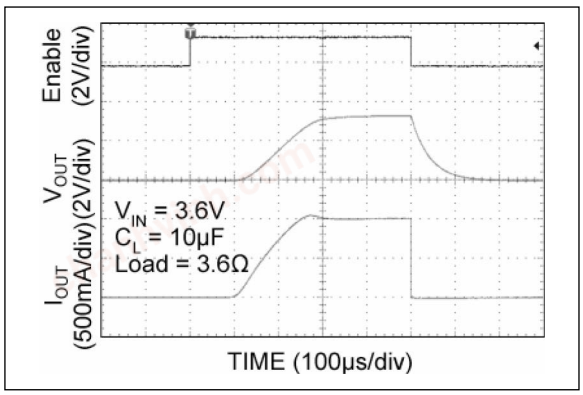


FIGURE 3-29: *MIC94094.*

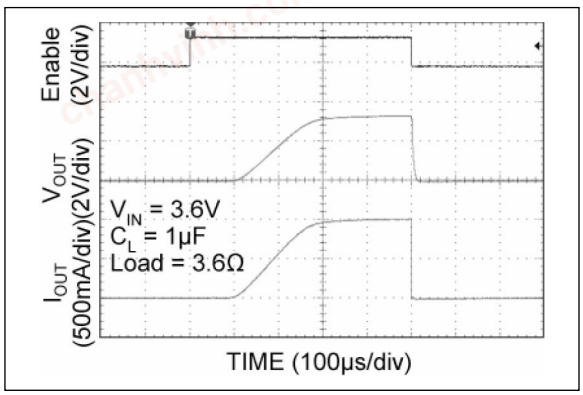


FIGURE 3-27: *MIC94094.*

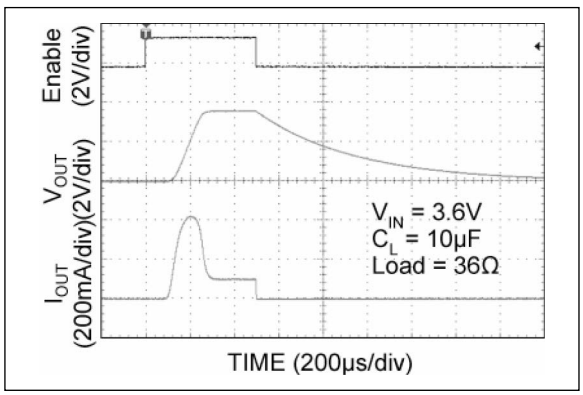


FIGURE 3-30: *MIC94094.*

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

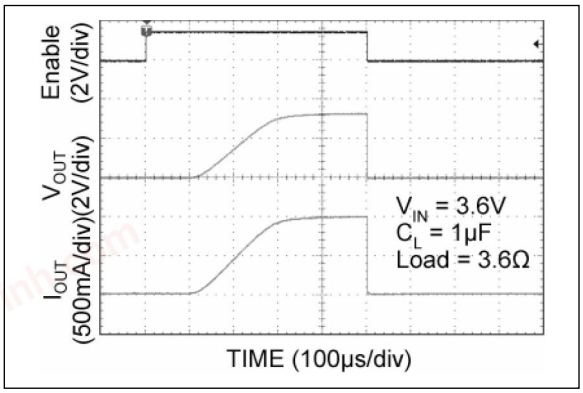


FIGURE 3-31: *MIC94095.*

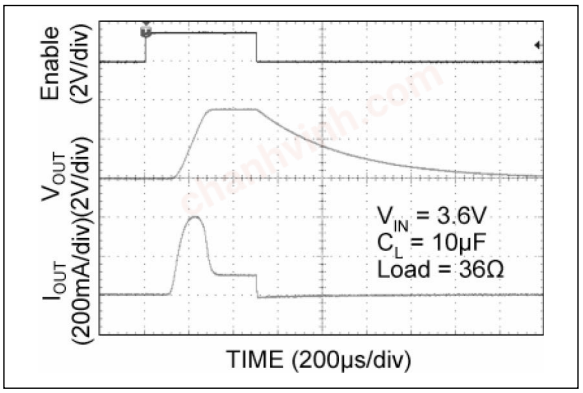


FIGURE 3-34: *MIC94095.*

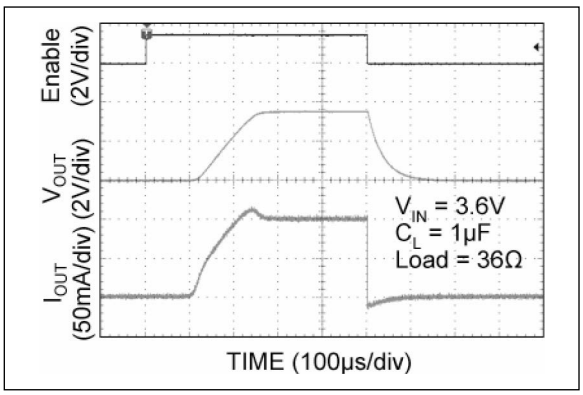


FIGURE 3-32: *MIC94095.*

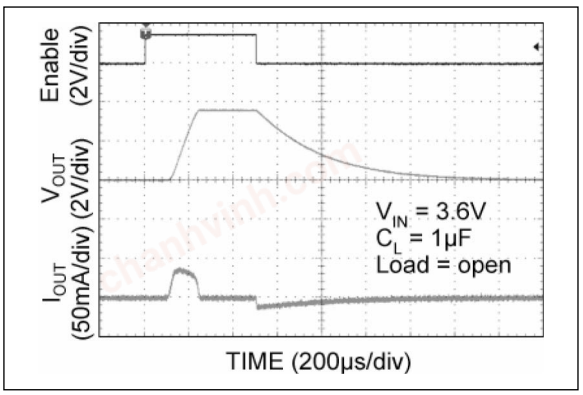


FIGURE 3-35: *MIC94095.*

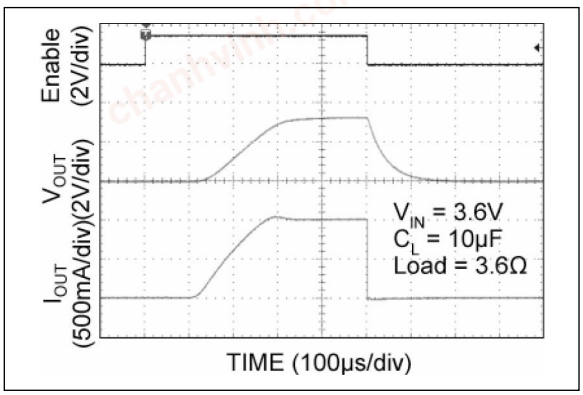


FIGURE 3-33: *MIC94095.*

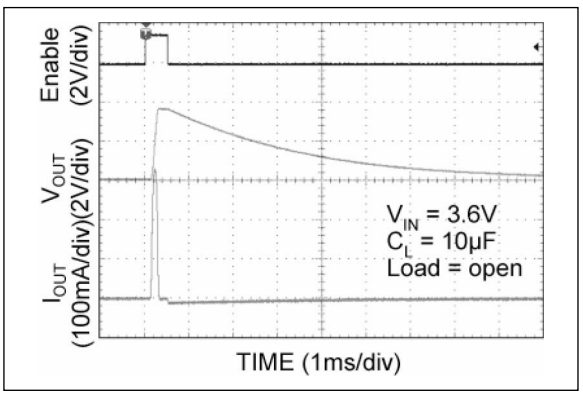


FIGURE 3-36: *MIC94095.*

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

4.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in Table 4-1.

TABLE 4-1: PIN FUNCTION TABLE

Pin Number		Pin Name	Pin Function
UDFN	SC-70-6		
1	1	VOUT	Drain of P-Channel MOSFET.
4	2, 5	GND	Ground: Connect to electrical ground.
3	4	VIN	Source of P-Channel MOSFET.
2	6	EN	Enable (Input): Active-high CMOS-compatible control input for switch. Internal 2 MΩ pull down resistor to GND, output will be off if this pin is left floating.
—	3	NC	No Internal Connection. A signal or voltage applied to this pin will have no effect on device operation.

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

5.0 APPLICATION INFORMATION

5.1 Power Dissipation Considerations

As with all power switches, the ultimate current rating of the switch is limited by the thermal properties of the package and the PCB it is mounted on. There is a simple, ohms law type relationship between thermal resistance, power dissipation and temperature which are analogous to an electrical circuit:

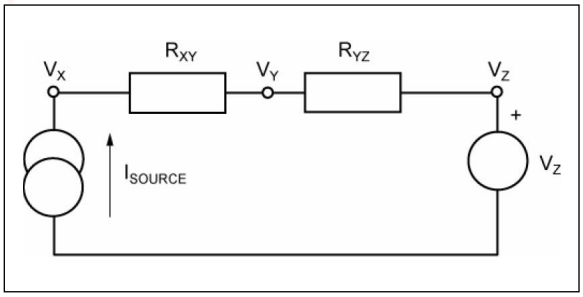


FIGURE 5-1: *Electrical Circuit.*

From this simple circuit we can calculate Vx if we know I_{SOURCE}, Vz and the resistor values, Rxy and Ryz using the equation:

EQUATION 5-1:

$$Vx = I_{SOURCE} \times (Rxy + Ryz) + Vz$$

Thermal circuits can be considered using these same rules and can be drawn similarly replacing current sources with Power dissipation (in Watts), Resistance with Thermal Resistance (in °C/W) and Voltage sources with temperature (in °C).

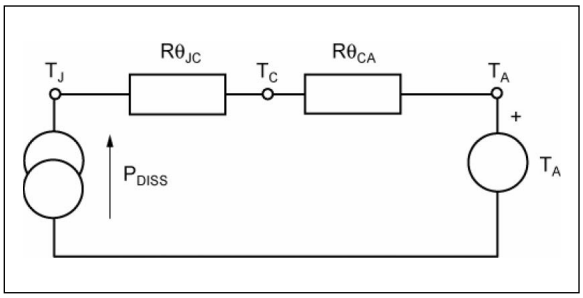


FIGURE 5-2: *Thermal Equivalent Circuit.*

Now replacing the variables in the equation for Vx, we can find the junction temperature (T_J) from power dissipation, ambient temperature and the known thermal resistance of the PCB ($R_{\theta CA}$) and the package ($R_{\theta JA}$).

EQUATION 5-2:

$$T_J = P_{DISS} \times (R_{\theta JC} + R_{\theta CA}) + T_{AMB}$$

It is this equation that is used to determine the graphs in Section 2.0, Typical Performance Curves. P_{DISS} is calculated as (I_{SWITCH}^2 x R_{SWmax}). $R_{\theta JC}$ is found in the operating ratings section of the data sheet and $R_{\theta CA}$ (the PCB thermal resistance) values for various PCB copper areas can be taken from Designing with Low Dropout Voltage Regulators, available on the Microchip website.

EXAMPLE 5-1:

A switch is intended to drive a 500 mA load and is placed on a printed circuit board which has a ground plane area of at least 25 mm square. The Voltage source is a Li-ion battery with a lower operating threshold of 3V and the ambient temperature of the assembly can be up to 50°C.

Summary of variables:

- I_{SW} = 0.5A
- V_{IN} = 3V to 4.2V
- T_{AMB} = 50°C
- $R_{\theta JC}$ = 60°C/W
- $R_{\theta CA}$ = 53°C/W, read from Figure 5-3.

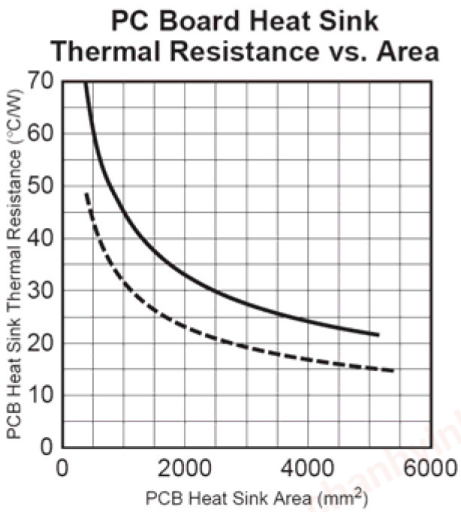


FIGURE 5-3: *Electrical Circuit.*

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

EQUATION 5-3:

$$P_{DISS} = I_{SW}^2 \times R_{SWmax}$$

The worst case switch resistance (R_{SWmax}) at the lowest V_{IN} of 3V is not available in the data sheet, so the next lower value of V_{IN} is used: R_{SWmax} at 2.5V = 315 mΩ.

If this were a figure for worst case R_{SWmax} for 25°C, an additional consideration is to allow for the maximum junction temperature of 125°C, the actual worst case resistance in this case will be 30% higher (see $R_{DS(ON)}$ variance vs. temperature graph):
R_{SWmax} at 2.5V (at 125°C) = 315 x 1.3 = 410 mΩ.

Therefore, junction temperature (T_J):
T_J = 0.52 x 0.41 x (60+53) + 50 (from Equation 5-2) and T_J = 62°C. This is well below the maximum 125°C.


© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com


6.0 PACKAGING INFORMATION

6.1 Package Marking Information


6-Lead SC-70 (front)




Example




6-Lead SC-70 (back)




Example



4-Lead UDFN



Example



Legend:	XX...X	Product code or customer-specific information
	Y	Year code (last digit of calendar year)
	YY	Year code (last 2 digits of calendar year)
	WW	Week code (week of January 1 is week ‘01’)
	NNN	Alphanumeric traceability code
	(e3)	Pb-free JEDEC® designator for Matte Tin (Sn)
	*	This package is Pb-free. The Pb-free JEDEC designator ((e3)) can be found on the outer packaging for this package.
	●, ▲, ▼	Pin one index is identified by a dot, delta up, or delta down (triangle mark).
Note:		In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. Package may or may not include the corporate logo.
		Underbar (_) and/or Overbar (¯) symbol may not be to scale.

Note: If the full seven-character YYWWNNN code cannot fit on the package, the following truncated codes are used based on the available marking space:
6 Characters = YWWNNN; 5 Characters = WWNNN; 4 Characters = WNNN; 3 Characters = NNN;
2 Characters = NN; 1 Character = N.

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

TABLE 6-1: MARKING CODES

Part Number	Part Marking (Note 1)	Fast Turn On	Soft-Start	Load Discharge	Package (Note 2) (Note 3)
MIC94090YC6	D1D	Yes	—	No	6-Lead SC-70
MIC94091YC6	D2D	Yes	—	Yes	6-Lead SC-70
MIC94092YC6	D5D	No	790 µs	No	6-Lead SC-70
MIC94093YC6	D7D	No	790 µs	Yes	6-Lead SC-70
MIC94094YC6	0DD	No	120 µs	No	6-Lead SC-70
MIC94095YC6	1DD	No	120 µs	Yes	6-Lead SC-70
MIC94090YMT	D1	Yes	—	No	4-Lead 1.25 mm x 1.25 mm UDFN
MIC94091YMT	D2	Yes	—	Yes	4-Lead 1.25 mm x 1.25 mm UDFN
MIC94092YMT	D5	No	790 µs	No	4-Lead 1.25 mm x 1.25 mm UDFN
MIC94093YMT	D7	No	790 µs	Yes	4-Lead 1.25 mm x 1.25 mm UDFN
MIC94094YMT	0D	No	120 µs	No	4-Lead 1.25 mm x 1.25 mm UDFN
MIC94095YMT	1D	No	120 µs	Yes	4-Lead 1.25 mm x 1.25 mm UDFN

Note 1: Under bar symbol (__) may not be to scale.

2: UDFN ▲ = Pin 1 identifier.


3: UDFN is a GREEN RoHS-compliant package. Lead finish is NiPdAu. Mold compound is Halogen Free.

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries


chanhvinh.com

6-Lead Plastic package, EIAJ standard (D4A) - 2.0x1.25 mm Body [SC70]
Micrel Legacy Package


Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

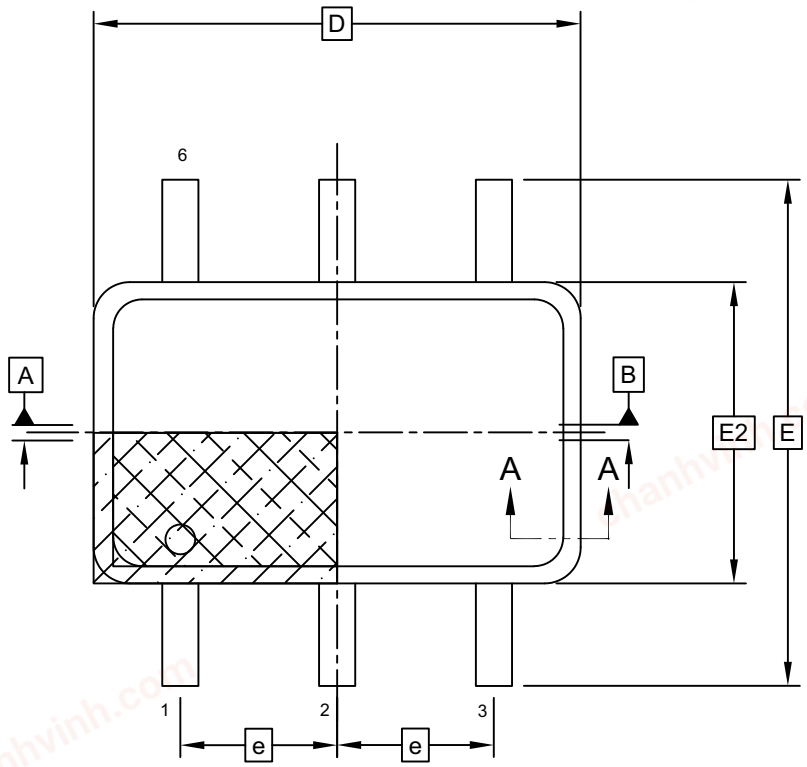

TOP VIEW

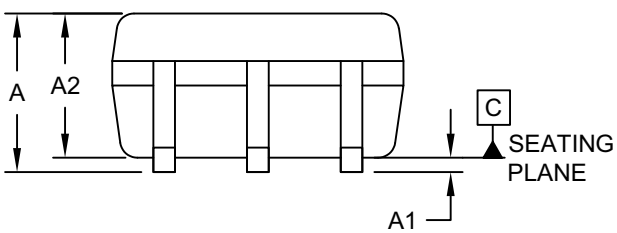

SIDE VIEW



END VIEW


Microchip Technology Drawing C04-1133 Rev A Sheet 1 of 2

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries


chanhvinh.com

6-Lead Plastic package, EIAJ standard (D4A) - 2.0x1.25 mm Body [SC70]
Micrel Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

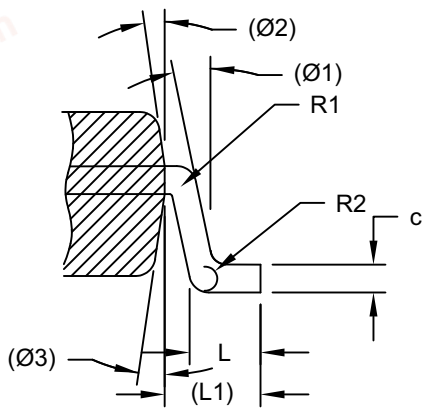

SECTION A–A

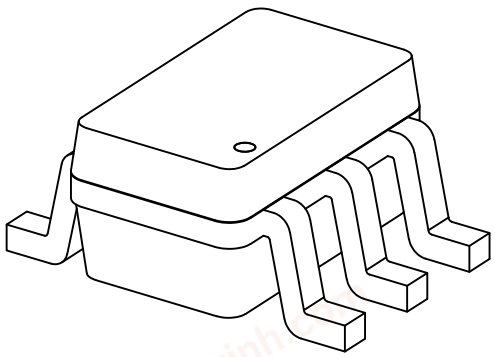

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N		6	
Pitch	e		0.65 BSC	
Overall Height	A	-	-	1.10
Standoff	A1	0.00	-	0.10
Molded Package Thickness	A2	0.80	–	1.00
Overall Length	D		2.00 BSC	
Overall Width	E		2.10 BSC	
Molded Package Width	E2		1.25 BSC	
Terminal Width	b	0.15	–	0.30
Terminal Thickness	c	0.08	-	0.25
Terminal Length	L	0.21	–	0.46
Footprint	L1		0.55 REF	
Lead Bend Radius	R1	0.02	-	0.08
Lead Bend Radius	R2	0.08	-	0.20
Lead Angle	θ1		12° REF	
Mold Draft Angle	θ2		8° REF	
Mold Draft Angle	θ3		8° REF	

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.


Microchip Technology Drawing C04-1133 Rev A Sheet 2 of 2

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

6-Lead Plastic package, EIAJ standard (D4A) - 2.0x1.25 mm Body [SC70]
Micrel Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

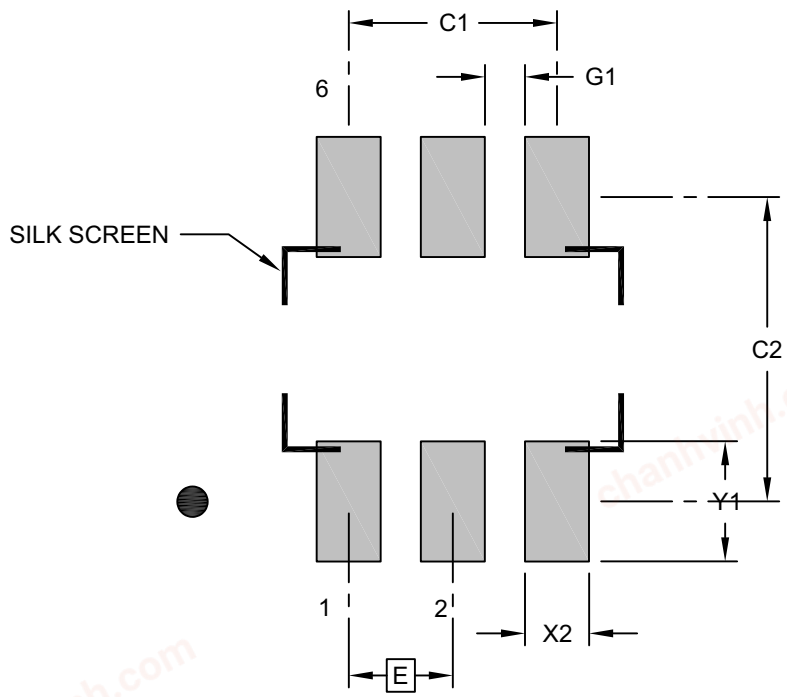

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E		0.65 BSC	
Contact Pad Spacing	C1		1.30	
Contact Pad Spacing	C2		1.90	
Contact Pad Width (X6)	X1			0.42
Contact Pad Length (X6)	Y1			0.77
Contact Pad to Contact Pad (X4)	G1	0.25		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process


Microchip Technology Drawing C04-2133 Rev A

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

4-Lead Ultra Thin Plastic Dual Flat, No Lead Package (HDA) - 1.25x1.25 mm Body [UDFN] With 0.6 mm Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

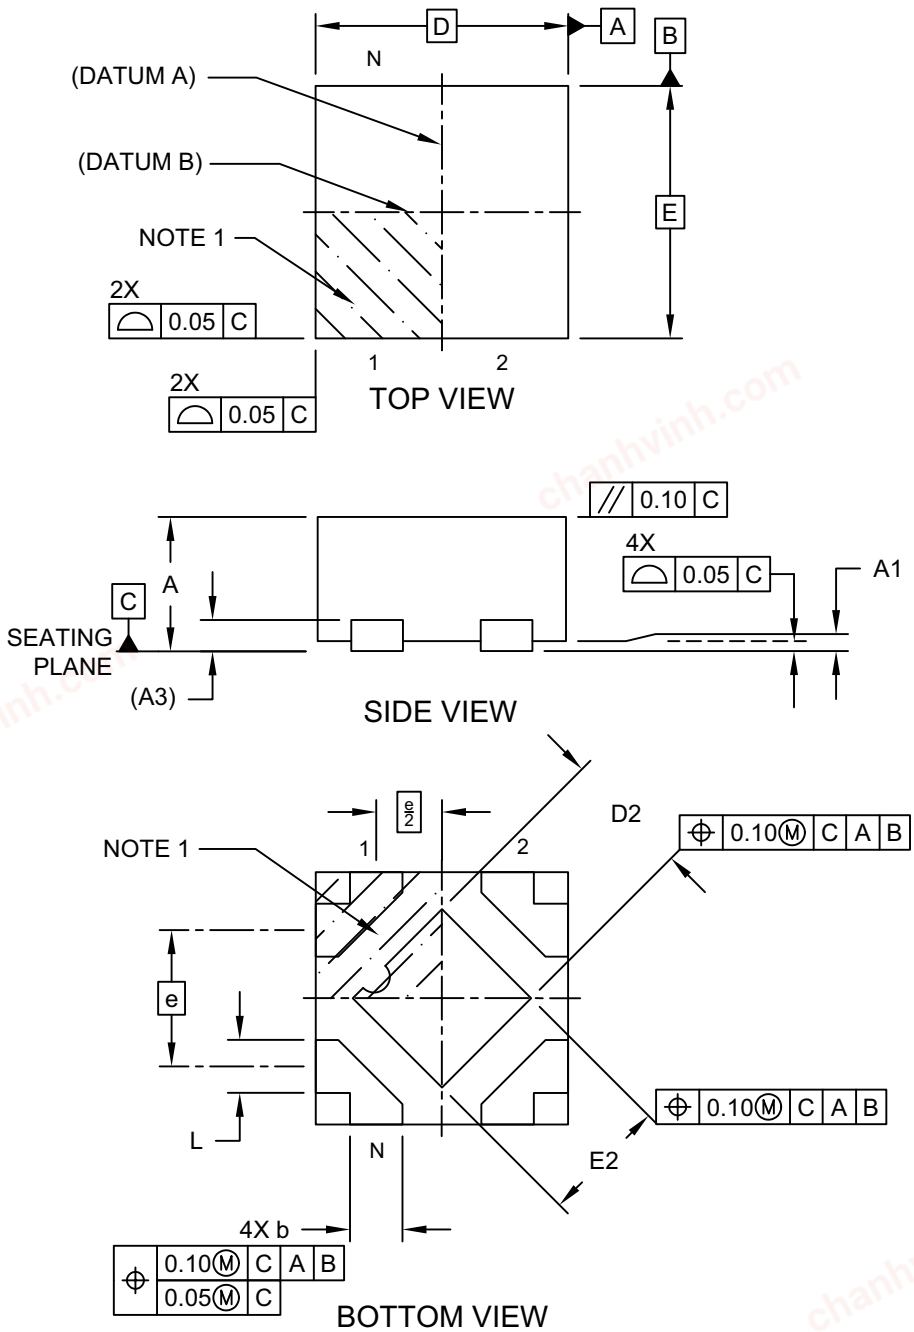


Microchip Technology Drawing C04-1150 Rev A Sheet 1 of 2

chanhvinh.com

4-Lead Ultra Thin Plastic Dual Flat, No Lead Package (HDA) - 1.25x1.25 mm Body [UDFN] With 0.6 mm Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

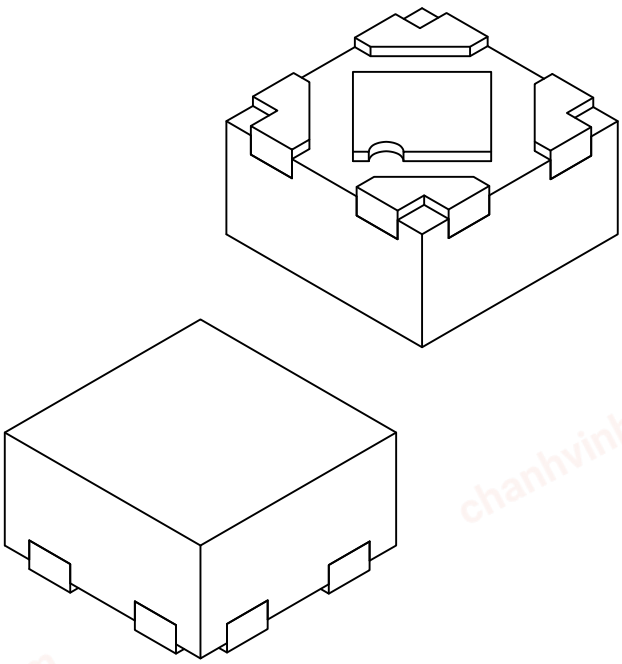

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N		4	
Pitch	e		0.65 BSC	
Overall Height	A	0.50	0.55	0.60
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3		0.152 REF	
Overall Length	D		1.20 BSC	
Exposed Pad Length	D2	0.55	0.60	0.65
Overall Width	E		1.20 BSC	
Exposed Pad Width	E2	0.55	0.60	0.65
Terminal Width	b	0.20	0.25	0.30
Terminal Length	L	0.20	0.25	0.30

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

   REF: Reference Dimension, usually without tolerance, for information purposes only.


Microchip Technology Drawing C04-1150 Rev A Sheet 2 of 2

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

4-Lead Ultra Thin Plastic Dual Flat, No Lead Package (HDA) - 1.25x1.25 mm Body [UDFN] With 0.6 mm Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

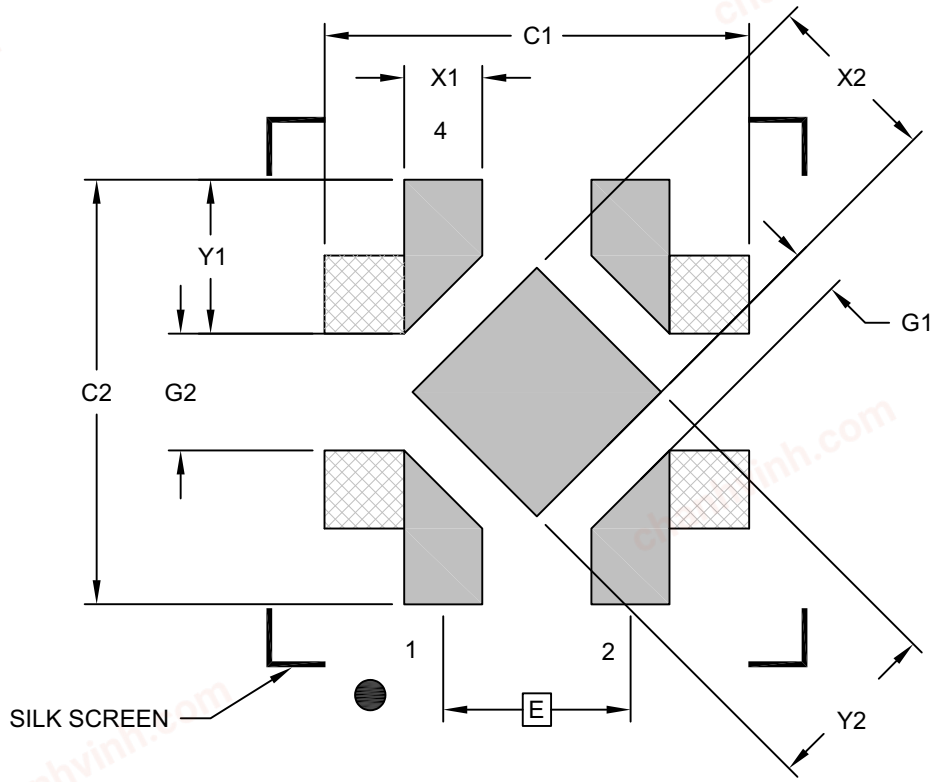

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E		0.65 BSC	
Center Pad Width	X2			0.58
Center Pad Length	Y2			0.58
Contact Pad Overall Length	C1		1.40	
Contact Pad Overall Width	C2		1.40	
Contact Pad Width (X4)	X1			0.26
Contact Pad Length (X4)	Y1			0.50
Contact Pad to Center Pad (X4)	G1	0.16		
Contact Pad to Contact Pad (X4)	G2	0.39		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-3150 Rev A

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

NOTES:

chanhvinh.com

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

APPENDIX A: REVISION HISTORY

Revision B (April 2024)

- Updated details for Typical Application Circuits.
- Updated Table 4-1.
- Updated package drawings in Section 6.0, Packaging Information.
- Minor text and format changes throughout.

Revision A (September 2022)

- Converted Micrel document MIC94090/1/2/3/4/5 to Microchip data sheet DS20006706A.
- Minor text changes throughout.

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

NOTES:

chanhvinh.com

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, contact your local Microchip representative or sales office.

PART No.	X	XX	-XX
Device	Junction Temp. Range	Package	Media Type

Device:	MIC94090:	High Side Load Switch with Fast Turn On
	MIC94091:	High Side Load Switch with Fast Turn On and Load Discharge
	MIC94092:	High Side Load Switch with 790 µs Soft-Start
	MIC94093:	High Side Load Switch with 790 µs Soft-Start and Load Discharge
	MIC94094:	High Side Load Switch with 120 µs Soft-Start
	MIC94095:	High Side Load Switch with 120 µs Soft-Start and Load Discharge
Junction Temperature Range:	Y =	-40°C to +125°C
Package:	C6 =	6-Lead SC-70
	MT =	4-Lead 1.25 mm x 1.25 mm UDFN
Media Type:	TR =	3000/Reel (SC-70-6 option only)
	TR =	5000/Reel (UDFN option only)

Examples:

a) MIC94090YC6-TR: MIC94090, -40°C to +125°C Temp. Range, 6-Lead SC-70, 3000/Reel

b) MIC94091YMT-TR: MIC94091, -40°C to +125°C Temp. Range, 4-Lead 1.25 mm x 1.25 mm UDFN, 5000/Reel

c) MIC94092YC6-TR: MIC94092, -40°C to +125°C Temp. Range, 6-Lead SC-70, 3000/Reel

d) MIC94093YMT-TR: MIC94093, -40°C to +125°C Temp. Range, 4-Lead 1.25 mm x 1.25 mm UDFN, 5000/Reel

e) MIC94094YC6-TR: MIC94094, -40°C to +125°C Temp. Range, 6-Lead SC-70, 3000/Reel

f) MIC94095YMT-TR: MIC94095, -40°C to +125°C Temp. Range, 4-Lead 1.25 mm x 1.25 mm UDFN, 5000/Reel

Note 1: Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.

chanhvinh.com

chanhvinh.com

NOTES:

chanhvinh.com

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries

chanhvinh.com

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable" Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at https://www.microchip.com/en-us/support/design-help/client-support-services.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.

Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, TimeCesium, TimeHub, TimePictra, TimeProvider, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, Clockstudio, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, EyeOpen, GridTime, IdealBridge, IGaT, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, IntelliMOS, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, MarginLink, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, mSiC, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, Power MOS IV, Power MOS 7, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQI, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, Trusted Time, TSHARC, Turing, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.
© 2022 - 2024, Microchip Technology Incorporated and its subsidiaries.

All Rights Reserved.

ISBN: 978-1-6683-4344-9

chanhvinh.com

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
http://www.microchip.com/support
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

Raleigh, NC
Tel: 919-844-7510

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110
Tel: 408-436-4270

Canada - Toronto
Tel: 905-695-1980
Fax: 905-695-2078

ASIA/PACIFIC

Australia - Sydney
Tel: 61-2-9868-6733

China - Beijing
Tel: 86-10-8569-7000

China - Chengdu
Tel: 86-28-8665-5511

China - Chongqing
Tel: 86-23-8980-9588

China - Dongguan
Tel: 86-769-8702-9880

China - Guangzhou
Tel: 86-20-8755-8029

China - Hangzhou
Tel: 86-571-8792-8115

China - Hong Kong SAR
Tel: 852-2943-5100

China - Nanjing
Tel: 86-25-8473-2460

China - Qingdao
Tel: 86-532-8502-7355

China - Shanghai
Tel: 86-21-3326-8000

China - Shenyang
Tel: 86-24-2334-2829

China - Shenzhen
Tel: 86-755-8864-2200

China - Suzhou
Tel: 86-186-6233-1526

China - Wuhan
Tel: 86-27-5980-5300

China - Xian
Tel: 86-29-8833-7252

China - Xiamen
Tel: 86-592-2388138

China - Zhuhai
Tel: 86-756-3210040

ASIA/PACIFIC

India - Bangalore
Tel: 91-80-3090-4444

India - New Delhi
Tel: 91-11-4160-8631

India - Pune
Tel: 91-20-4121-0141

Japan - Osaka
Tel: 81-6-6152-7160

Japan - Tokyo
Tel: 81-3-6880- 3770

Korea - Daegu
Tel: 82-53-744-4301

Korea - Seoul
Tel: 82-2-554-7200

Malaysia - Kuala Lumpur
Tel: 60-3-7651-7906

Malaysia - Penang
Tel: 60-4-227-8870

Philippines - Manila
Tel: 63-2-634-9065

Singapore
Tel: 65-6334-8870

Taiwan - Hsin Chu
Tel: 886-3-577-8366

Taiwan - Kaohsiung
Tel: 886-7-213-7830

Taiwan - Taipei
Tel: 886-2-2508-8600

Thailand - Bangkok
Tel: 66-2-694-1351

Vietnam - Ho Chi Minh
Tel: 84-28-5448-2100

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4485-5910
Fax: 45-4485-2829

Finland - Espoo
Tel: 358-9-4520-820

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Garching
Tel: 49-8931-9700

Germany - Haan
Tel: 49-2129-3766400

Germany - Heilbronn
Tel: 49-7131-72400

Germany - Karlsruhe
Tel: 49-721-625370

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Rosenheim
Tel: 49-8031-354-560

Israel - Ra'anana
Tel: 972-9-744-7705

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Padova
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Norway - Trondheim
Tel: 47-7288-4388

Poland - Warsaw
Tel: 48-22-3325737

Romania - Bucharest
Tel: 40-21-407-87-50

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Gothenberg
Tel: 46-31-704-60-40

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820

© 2022 - 2024 Microchip Technology Inc. and its subsidiaries.