chanhvinh.com

18 TURNS CERMET TRIMMERS CT-94


RoHS compliant



FEATURES

- RoHS compliant
- Thin body design (4.8 mm thick)
- 18 turns, sealed, precision type

INTERNAL STRUCTURE



	Part name	Material	Flammability
①	Housing	Polybutyleneterephthalate	UL94V-0
②	Base element	Ceramic	—
③	Wiper	Multi metal alloy	
④	Resistive element	RuO_2 cermet	
⑤	Electrode	Ag-Pd cermet	
⑥	Adhesive	Epoxy	UL94V-0
⑦	Terminal pin	Copper, Tin-plated	—
⑧	Rotor gear	Polyamide	UL94HB
⑨	Rubber cushion	Silicone rubber	—
!0	Shaft	Brass, Nickel-plated	

PART NUMBER DESIGNATION

C T - 9 4 E W 1 k Ω (1 0 2)

Series name

Terminal pin
E : Sn (Lead-free)

Product shape
W, Y : Top adjustment
X, P, Z : Side adjustment

Resistance code





Resistance value

※ Please refer to the LIST OF PART NUMBERS when placing orders.

chanhvinh.com

CT-94
CERMET TRIMMERS

LIST OF PART NUMBERS

Adjustment position	Shape of terminal (Top view)	Form of packaging: Plastic bag	Pieces in package
Top adjustment		CT-94EW	50 pcs./pack
		CT-94EY	
Side adjustment (↑ Adjustment direction)		CT-94EX	
		CP-94EP	
		CT-94EZ	

ELECTRICAL CHARACTERISTICS

Nominal resistance range	10 Ω ~ 2 M Ω
Resistance tolerance	± 10 %
Power ratings	0.5 W (70 °C) 0 W (125 °C)
Resistance law	(B) Linear law
Maximum input voltage	DC300 V or power rating, whichever is smaller
Maximum wiper current	100 mA or power rating, whichever is smaller
Effective electrical turn	15 turns
End resistance	1 % or 2 Ω , whichever is greater
C.R.V.	1 % or 3 Ω , whichever is greater
Operating temp. range	− 55 ~ 125 °C
Temp. coefficient	10 Ω , 20 Ω : ± 250 10^{-6}/°C maximum 50 Ω ~ 2 M Ω : ± 100 10^{-6}/°C maximum
Insulation resistance	1000 M Ω minimum (DC500 V)
Dielectric strength	AC900 V, 60 s
Net weight	Approx. 0.88 g (CT-94EP) Approx. 0.92 g (CT-94EW, EX, EY, EZ)

〈Nominal resistance values〉

➔ 10 Ω	➔ 20 Ω		50 Ω	100 Ω	200 Ω		500 Ω	1 k Ω	2 k Ω	5 k Ω
10 k Ω	20 k Ω	➔ 25 k Ω	50 k Ω	100 k Ω	200 k Ω	➔ 250 k Ω	500 k Ω	1 M Ω	2 M Ω	

Fig.1

※ The above part numbers are all available with the respective combination of <Nominal resistance values> (Fig. 1).
※ Verify the above part numbers when placing orders.

The products indicated by ➔ mark are manufactured upon receipt of order basis.

MECHANICAL CHARACTERISTICS

Mechanical turn	18 turns
Operating torque	35 mN·m {357 gf·cm} maximum
Mechanical stop	Clutch action
Rotational life	200 cycles [△ R/R ≦ ± (2 Ω +3 %)]
Terminal strength	10 N {1.02 kgf} minimum (Tensile strength)
Thrust to shaft	10 N {1.02 kgf} minimum
Solderability	245 ± 3 °C, 2 ~ 3 s

{ } : Reference only

ENVIRONMENTAL CHARACTERISTICS

Test item	Test conditions	Specifications
Thermal shock	− 65 ~ 125 °C (0.5 h), 5 cycles	[△ R/R ≦ 1 %] [S.S. ≦ 1 %]
Humidity	− 10 ~ 65 °C (80 ~ 98 %), 10 cycles, 240 h	[△ R/R ≦ 2 %]
Shock	981 m/s^2, 6 ms 6 directions for 3 times each	[△ R/R ≦ 1 %] [S.S. ≦ 1 %]
Vibration	(Amplitude) 1.52 mm or (Acceleration) 196 m/s^2, 10 ~ 2000 Hz, 3 directions, 12 times each	
Load life	70 °C, 0.5 W, 1000 h	[△ R/R ≦ 3 %] [S.S. ≦ 1 %]
Low temp. operation	− 55 °C, 2 h	[△ R/R ≦ 2 %] [S.S. ≦ 2 %]
High temp. exposure	125 °C, 250 h	[△ R/R ≦ 3 %] [S.S. ≦ 2 %]
Immersion seal	85 °C, 60 s	No leaks (No continuous bubbles)
Soldering heat	Flow 260 ± 3 °C, 5 ~ 6 s, two times maximum Manual soldering 380 ± 10 °C, 3 ~ 4 s	[△ R/R ≦ 1 %]

△ R/R : Change in total resistance
S.S. : Setting stability

chanhvinh.com

CT-94
CERMET TRIMMERS

MAXIMUM INPUT RATINGS


Nominal resistance values (Ω)	Resistance code	Maximum input voltage (V)	Maximum wiper current (mA)
➔ 10	100	1.00	100
➔ 20	200	2.00	100
50	500	5.00	100
100	101	7.07	70.7
200	201	10.0	50.0
500	501	15.8	31.6
1 k	102	22.4	22.4
2 k	202	31.6	15.8
5 k	502	50.0	10.0
10 k	103	70.7	7.07
20 k	203	100	5.00
➔ 25 k	253	112	4.48
50 k	503	158	3.16
100 k	104	224	2.24
200 k	204	300	1.50
➔ 250 k	254	300	1.20
500 k	504	300	0.60
1 M	105	300	0.30
2 M	205	300	0.15

The products indicated by ➔ mark are manufactured upon receipt of order basis.


OUTLINE DIMENSIONS

Unless otherwise specified, tolerance: ± 0.3 (Unit: mm)

● CT-94EW
Top adjustment

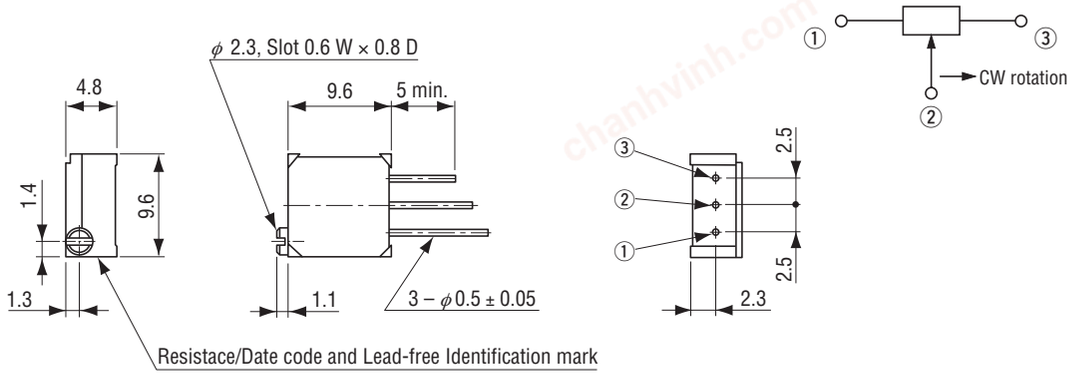

● CT-94EX
Side adjustment

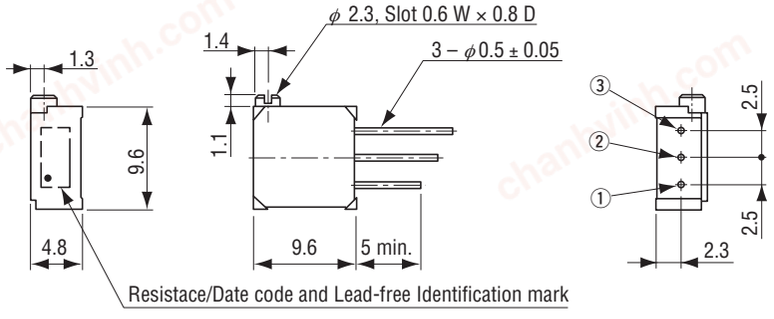


chanhvinh.com

CT-94
CERMET TRIMMERS


■ OUTLINE DIMENSIONS

Unless otherwise specified, tolerance: ± 0.3 (Unit: mm)


● CT-94EP
Side adjustment

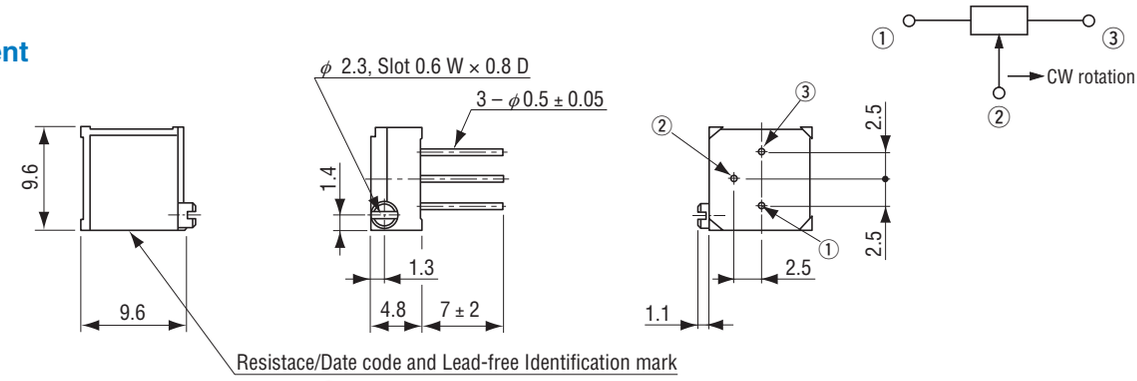

● CT-94EY
Top adjustment

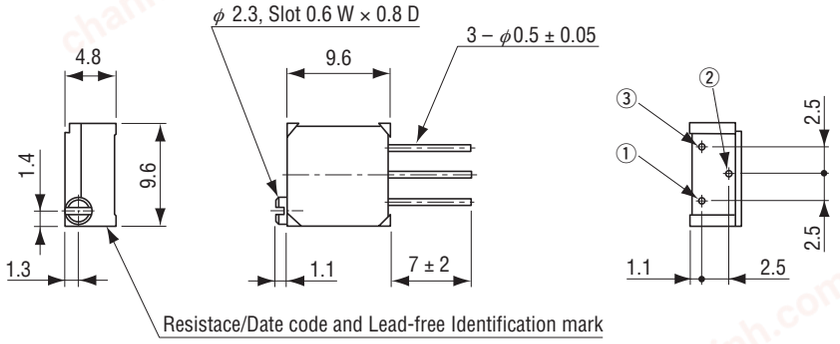

● CT-94EZ
Side adjustment

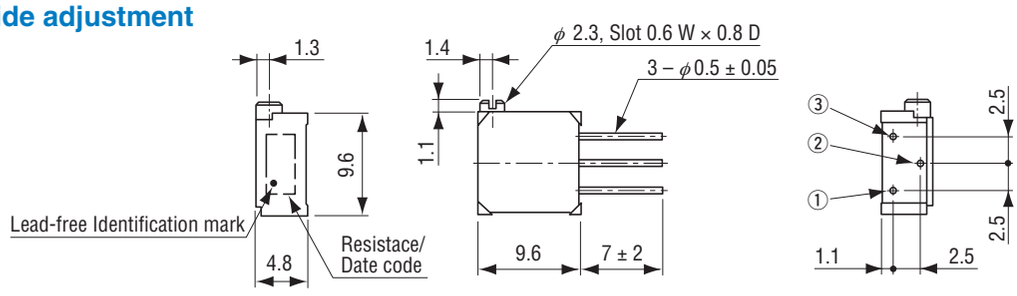

■ PACKAGING SPECIFICATIONS

<Bulk pack specifications>

- Unit of bulk in a plastic bag is 50 pcs. per pack.
- Boxing of bulk in a plastic bag is performed with 100 pcs. per box.