
chanhvinh.com

SLIDE SWITCHES (SMD) CMS


RoHS compliant

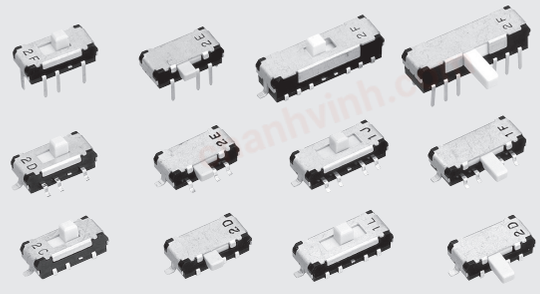

FEATURES

- RoHS compliant
- Excellent contact stability by twin Gold-plated contact mechanism
- Load life of 30,000 cycles
- Compatible with automatic mounting
- Withstands high soldering temperature

INTERNAL STRUCTURE

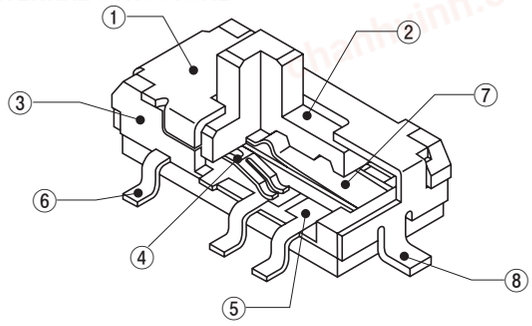

Part name		Material	Flammability
①	Cover	Steel (SPCC), Tin-plated	—
②	Slider	Polyamide	UL94V-0
③	Housing		
④	Slider contact	Copper alloy, Gold-plated	—
⑤	Fixed contact		
⑥	Terminal pin		
⑦	Click spring	Copper alloy	
⑧	Ground terminal	Steel (SPCC), Tin-plated	

PART NUMBER DESIGNATION

CMS - 2 2 0 2 T B

Series name

No. of poles
2 : 2 poles
4 : 4 poles

No. of contacts
2 : 2 contacts
3 : 3 contacts
4 : 4 contacts

Setting position
0 : Top setting
1 : Side setting

Knob length
2 : 2 mm
4 : 4 mm (2 poles · Side setting only)
6 : 6 mm (4 poles · Side setting only)

Form of packaging
T : Taping (Reel)
W : Tray packaging (Through hole pins only)
Blank : Bulk in plastic bag

Shape of terminal
A : J-hook
B : Gull wing
C : Through hole pins

※ Please refer to the LIST OF PART NUMBERS when placing orders.

chanhvinh.com

LIST OF PART NUMBERS

2 poles

Setting position	Shape of terminals	Knob length	Form of packaging	No. of contacts			Pieces in package
				2	3	4	
Top setting	A (J-hook)	2 mm	Taping	CMS-2202TA	CMS-2302TA	CMS-2402TA	900 pcs./reel
			Plastic bag	CMS-2202A	CMS-2302A	CMS-2402A	50 pcs./pack
	B (Gull wing)		Taping	CMS-2202TB	CMS-2302TB	CMS-2402TB	900 pcs./reel
			Plastic bag	CMS-2202B	CMS-2302B	CMS-2402B	50 pcs./pack
	C (Through hole pins)		Tray packaging	CMS-2202WC	CMS-2302WC	CMS-2402WC	50 pcs./tray
			Plastic bag	CMS-2202C	CMS-2302C	CMS-2402C	50 pcs./pack
Side setting	A (J-hook)	2 mm	Taping	CMS-2212TA	CMS-2312TA	CMS-2412TA	900 pcs./reel
			Plastic bag	CMS-2212A	CMS-2312A	CMS-2412A	50 pcs./pack
		4 mm	Taping	CMS-2214TA	CMS-2314TA	CMS-2414TA	900 pcs./reel
			Plastic bag	CMS-2214A	CMS-2314A	CMS-2414A	50 pcs./pack
	B (Gull wing)	2 mm	Taping	CMS-2212TB	CMS-2312TB	CMS-2412TB	900 pcs./reel
			Plastic bag	CMS-2212B	CMS-2312B	CMS-2412B	50 pcs./pack
		4 mm	Taping	CMS-2214TB	CMS-2314TB	CMS-2414TB	900 pcs./reel
			Plastic bag	CMS-2214B	CMS-2314B	CMS-2414B	50 pcs./pack
	Through hole pins	2 mm	Tray packaging	CMS-2212WC	CMS-2312WC	CMS-2412WC	50 pcs./tray
			Plastic bag	CMS-2212C	CMS-2312C	CMS-2412C	50 pcs./pack
		4 mm	Tray packaging	CMS-2214WC	CMS-2314WC	CMS-2414WC	50 pcs./tray
			Plastic bag	CMS-2214C	CMS-2314C	CMS-2414C	50 pcs./pack

4 poles

Setting position	Shape of terminals	Knob length	Form of packaging	No. of contacts	Pieces in package
				2	
Top setting	A (J-hook)	2 mm	Taping	CMS-4202TA	500 pcs./reel
			Plastic bag	CMS-4202A	25 pcs./pack
	B (Gull wing)		Taping	CMS-4202TB	500 pcs./reel
			Plastic bag	CMS-4202B	25 pcs./pack
	C (Through hole pins)		Tray packaging	CMS-4202WC	50 pcs./tray
			Plastic bag	CMS-4202C	25 pcs./pack
Side setting	A (J-hook)	6 mm	Taping	CMS-4216TA	500 pcs./reel
			Plastic bag	CMS-4216A	25 pcs./pack
	B (Gull wing)		Taping	CMS-4216TB	500 pcs./reel
			Plastic bag	CMS-4216B	25 pcs./pack
	C (Through hole pins)		Tray packaging	CMS-4216WC	50 pcs./tray
			Plastic bag	CMS-4216C	25 pcs./pack

※ Verify the above part numbers when placing orders.
Taping and tray version can be supplied only in reel or tray unit.

chanhvinh.com

CMS
SLIDE SWITCHES (SMD)

STANDARD SPECIFICATIONS

Operating temp. range	— 40 ~ 85 °C
Storage temp. range	
Sealing	Non- Washable
Net weight	0.40 g (CMS-2202) 0.42 g (CMS-2214) 0.45 g (CMS-2302) 0.48 g (CMS-2314) 0.50 g (CMS-2402) 0.54 g (CMS-2414) 0.42 g (CMS-2212) 0.80 g (CMS-4202) 0.48 g (CMS-2312) 0.84 g (CMS-4216) 0.54 g (CMS-2412)

ELECTRICAL CHARACTERISTICS

Contact rating Non-switching Switching Minimum	DC50 V 100 mA DC12 V 100 mA DC20 mV 1 μ A
Contact timing	Non-shorting
Contact resistance	70 m Ω maximum
Insulation resistance	100 M Ω minimum (DC500 V)
Dielectric strength	AC500 V, 60 s

MECHANICAL CHARACTERISTICS


No. of positions	2, 3, 4
Stroke	2 mm
Operating force	1.5 ± 1 N {0.15 ± 0.1 kgf}
Stop strength	30N{3.06 kgf} 15 s (Top setting) 10N{1.02 kgf} 15 s (Side setting)
Solderability	245 ± 3 °C 2 ~ 3 s
Soldering heat	Reflow : 255 °C (Peak temperature) (Please refer to the profile below)
	Flow : 260 ± 3 °C、5~ 6 s
	Manual soldering : 350 ± 10 °C, 3 ~ 4 s
Shear (Adhesion)	50 N {5.09 kgf} 10 s
Substrate bending	Width 90 mm, bend 3 mm, 5 s, 1 time
Pull-off strength	50 N {5.09 kgf} 10 s

{ } : Reference only

ENVIRONMENTAL CHARACTERISTICS

Vibration	(Amplitude) 1.5 mmor (Acceleration) 98 m/s^2, 10-500-10 Hz, 3 directions for 10 cycles each
Shock	490 m/s^2, 11 ms, sinusoidal wave half cycle, 6 directions for 3 times each
Load life	Continuous load 30000 cycles, DC12 ± 0.5 V, 100 ± 10 mA
Humidity	40 °C, Relative humidity 90 ~ 95 %, 240 h, No load
High temp. exposure	85 °C, 96 h, No load
Low temp. exposure	— 40 °C, 96 h, No load
Thermal shock	— 40 (0.5 h) ~ 85 °C (0.5 h), 5 cycles

〈Reflow profile for soldering heat evaluation〉

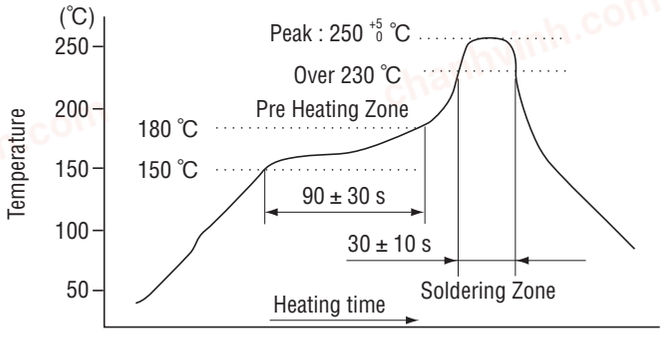

Reflow : two times maximum


chanhvinh.com

CMS
SLIDE SWITCHES (SMD)


OUTLINE DIMENSIONS

Unless otherwise specified, tolerance : ± 0.3 (Unit : mm)


● CMS-2202A

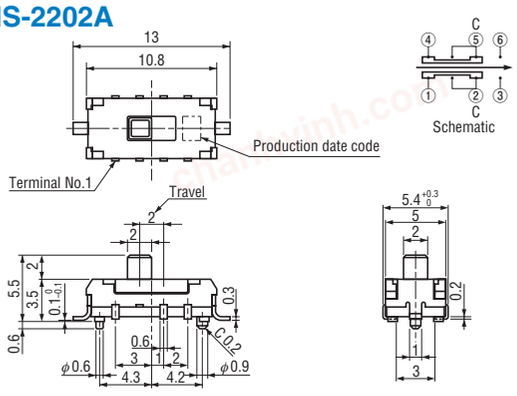


● CMS-2202B

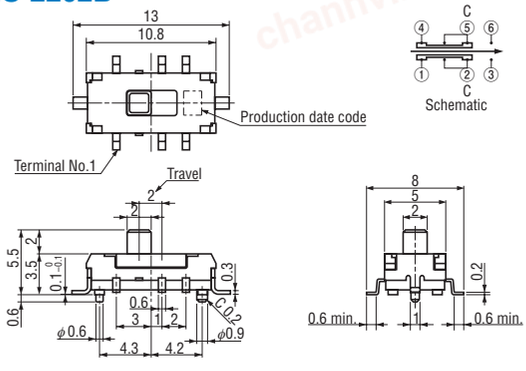


● CMS-2202C

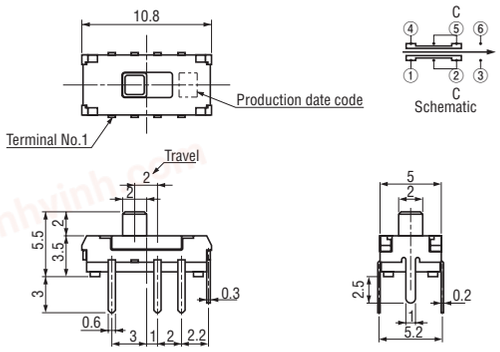


● CMS-2212A

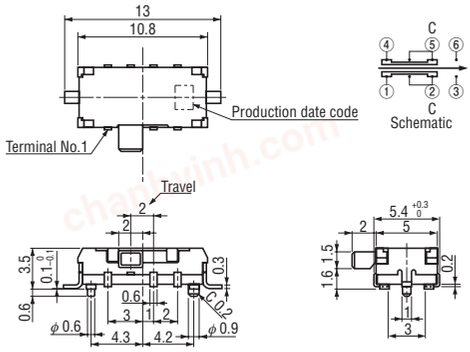


● CMS-2212B

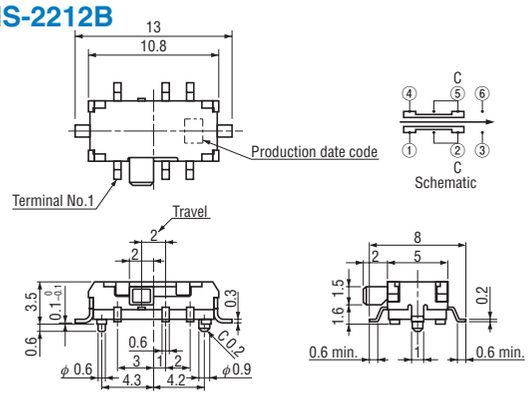


● CMS-2212C

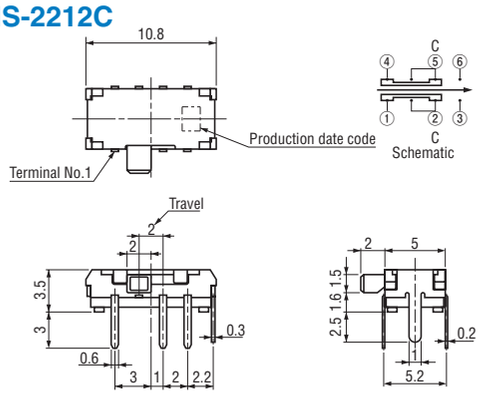

● CMS-2214A

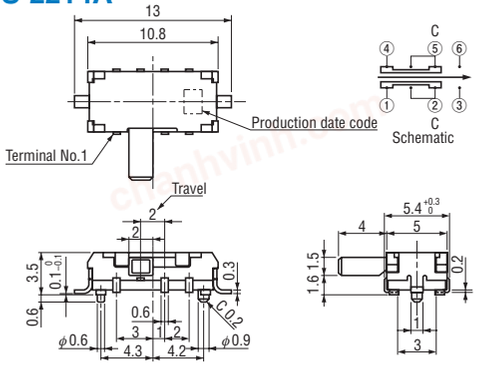

● CMS-2214B

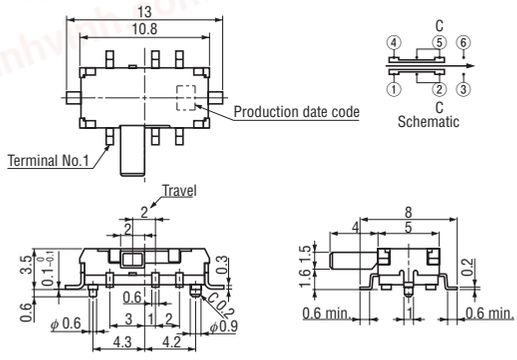


chanhvinh.com

CMS
SLIDE SWITCHES (SMD)


■ OUTLINE DIMENSIONS

Unless otherwise specified, tolerance : ± 0.3 (Unit : mm)


● CMS-2214C

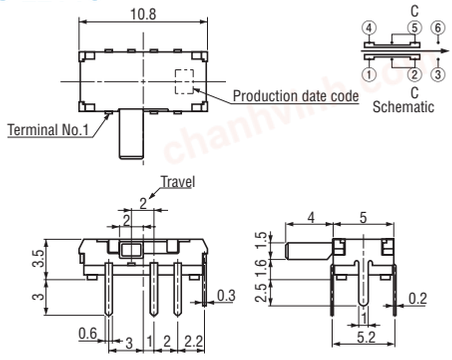


● CMS-2302A

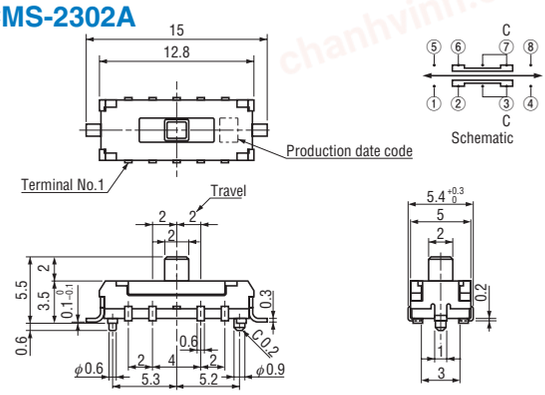


● CMS-2302B

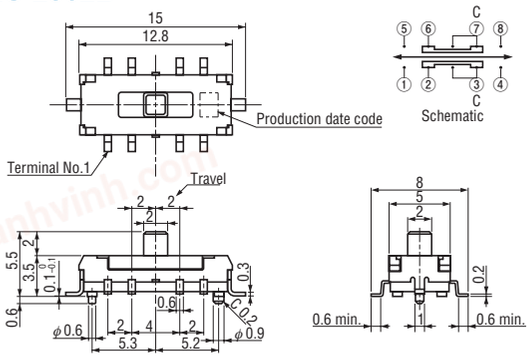


● CMS-2302C

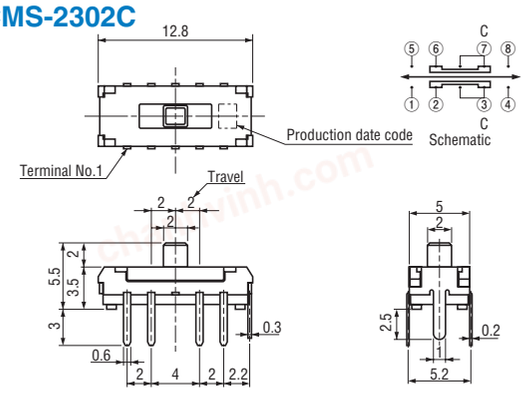


● CMS-2312A

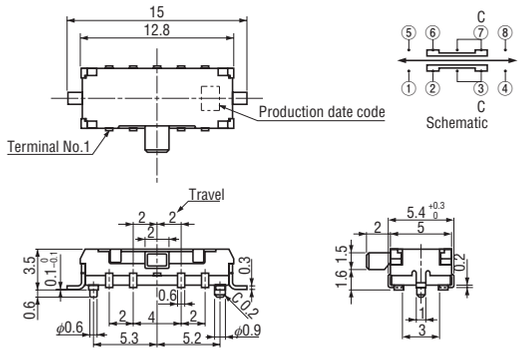


● CMS-2312B

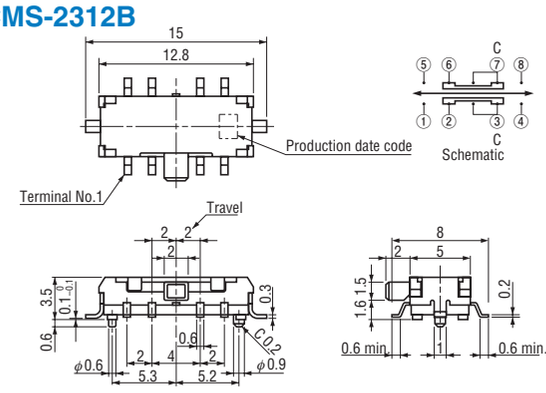

● CMS-2312C

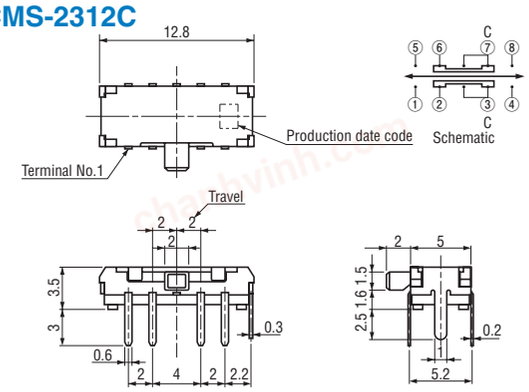

● CMS-2314A

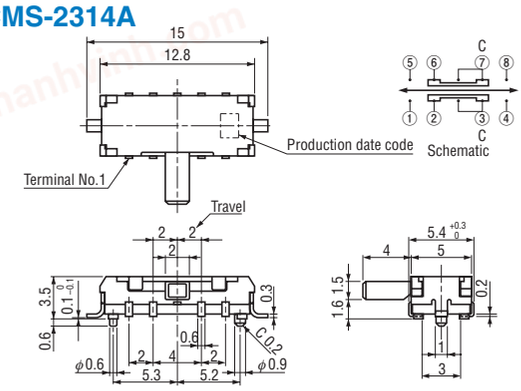


chanhvinh.com

CMS
SLIDE SWITCHES (SMD)


OUTLINE DIMENSIONS

Unless otherwise specified, tolerance : ± 0.3 (Unit : mm)


● CMS-2314B

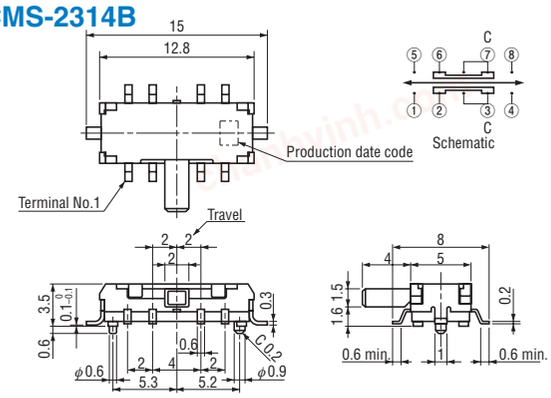


● CMS-2314C

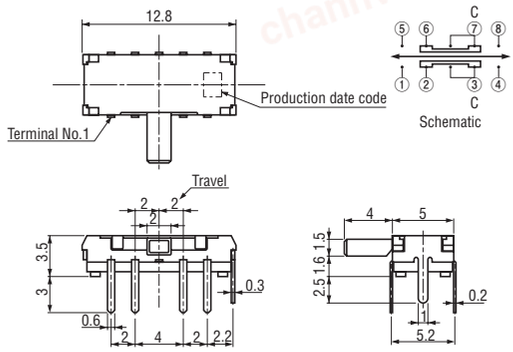


● CMS-2402A

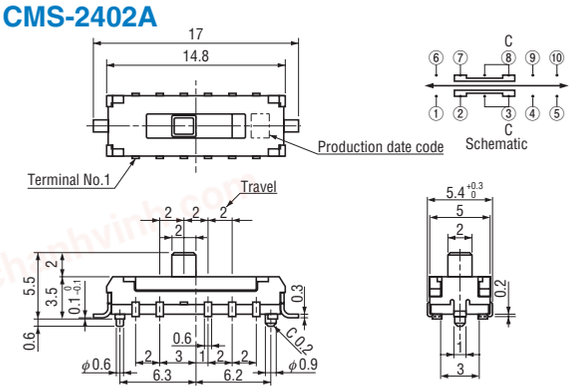


● CMS-2402B

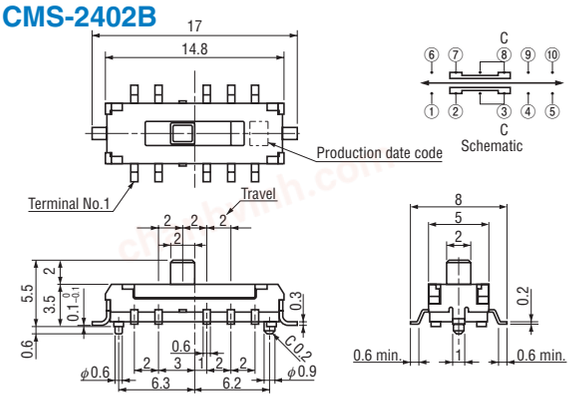


● CMS-2402C

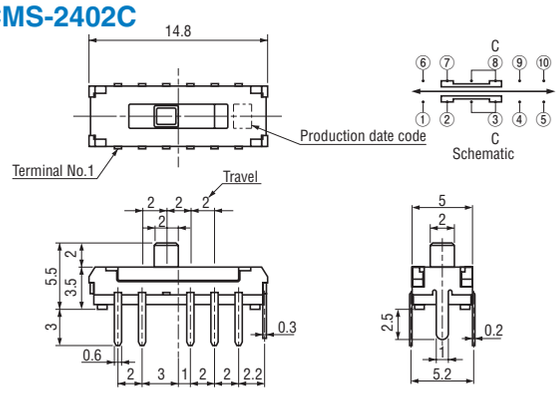


● CMS-2412A

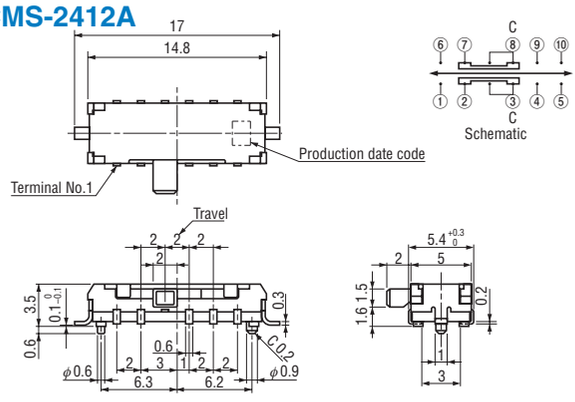

● CMS-2412B

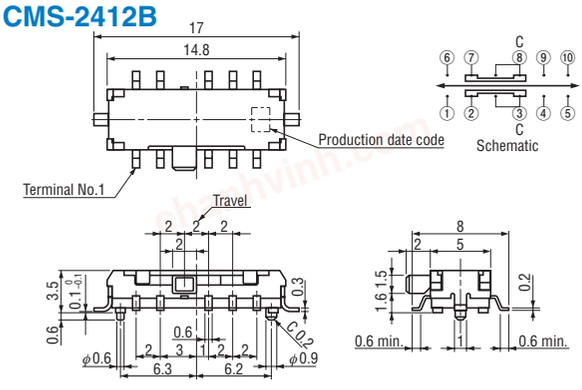

● CMS-2412C

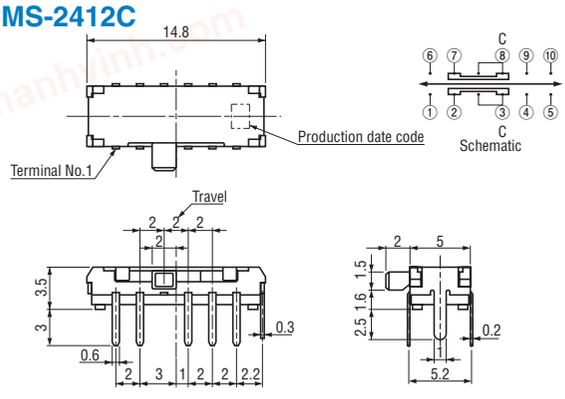


chanhvinh.com

CMS
SLIDE SWITCHES (SMD)


OUTLINE DIMENSIONS

Unless otherwise specified, tolerance : ± 0.3 (Unit : mm)


● CMS-2414A

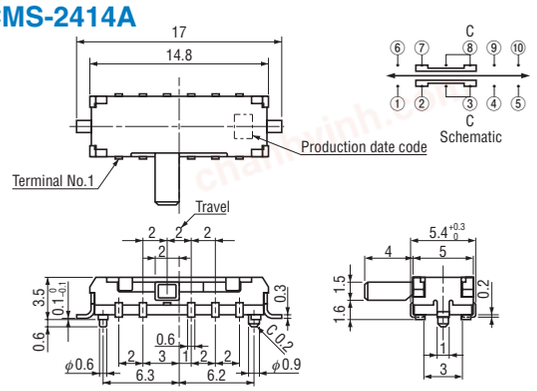


● CMS-2414B

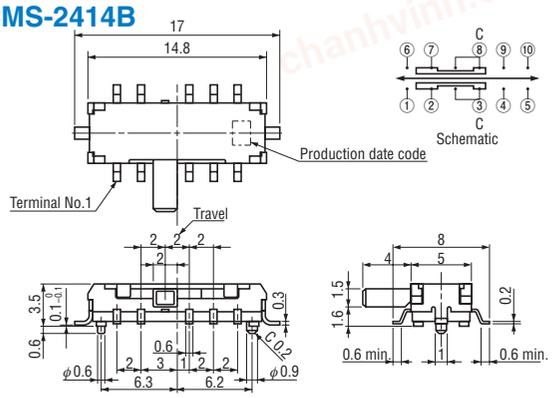


● CMS-2414C

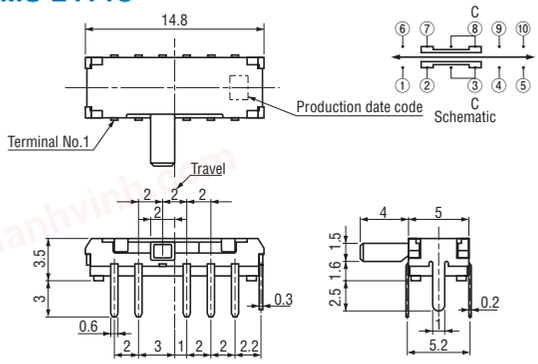


● CMS-4202A

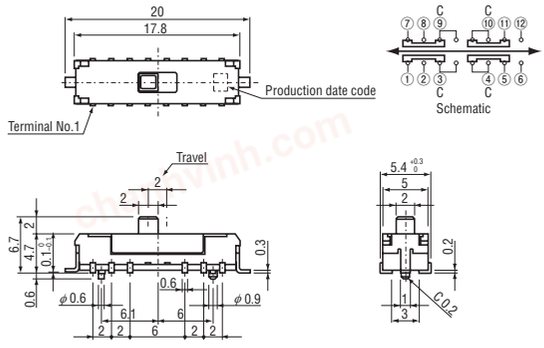


● CMS-4202B

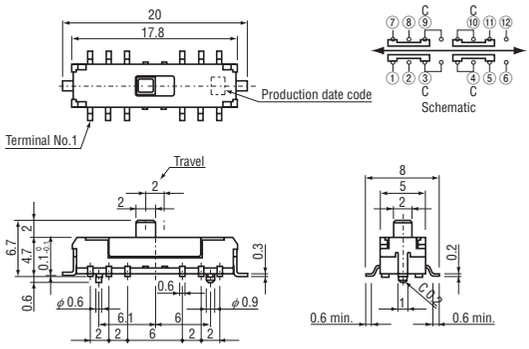


● CMS-4202C

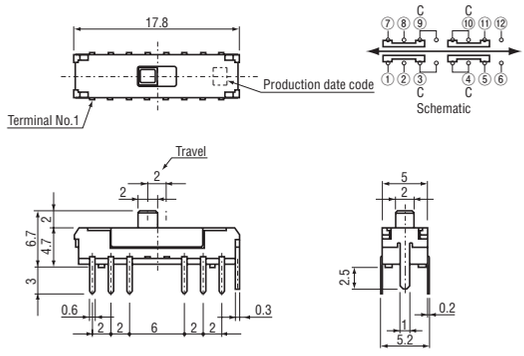

● CMS-4216A

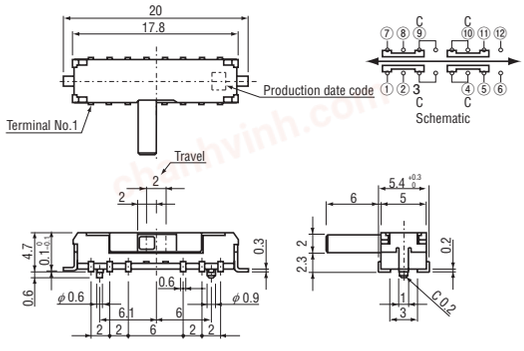

● CMS-4216B

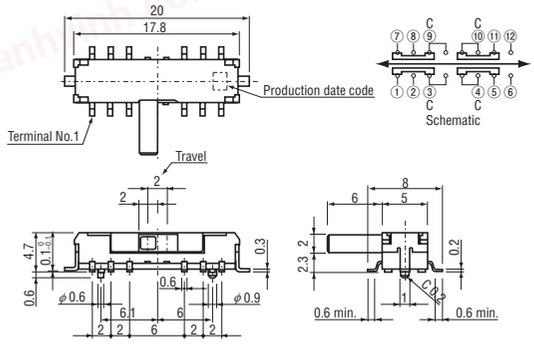


chanhvinh.com

CMS
SLIDE SWITCHES (SMD)

■ OUTLINE DIMENSIONS

Unless otherwise specified, tolerance : ± 0.3 (Unit : mm)


● CMS-4216C

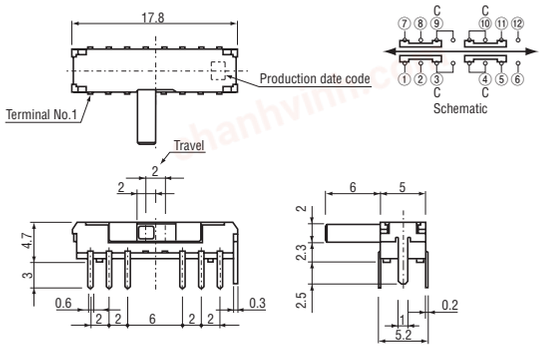


■ SIZE OF P.C.B. PROCESSING

(Unit : mm)


● CMS-22□□C




● CMS-23□□C



● CMS-24□□C



● CMS-42□□C

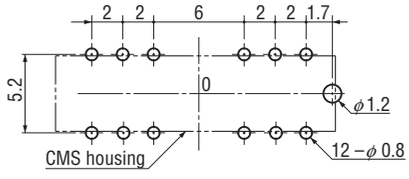


chanhvinh.com

CMS
SLIDE SWITCHES (SMD)


■ RECOMMENDED P.C.B. PAD OUTLINE DIMENSIONS

(Unit : mm)


● CMS-22□□A

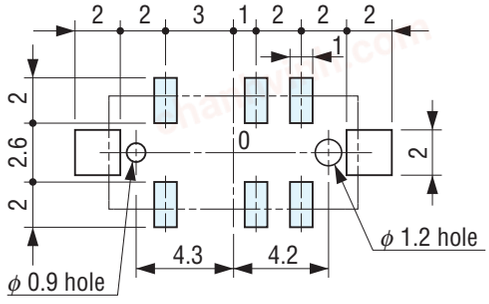


● CMS-22□□B

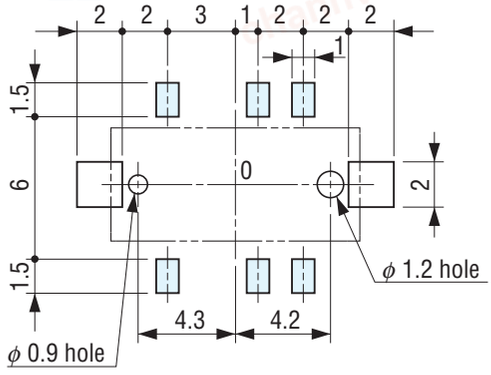


● CMS-23□□A

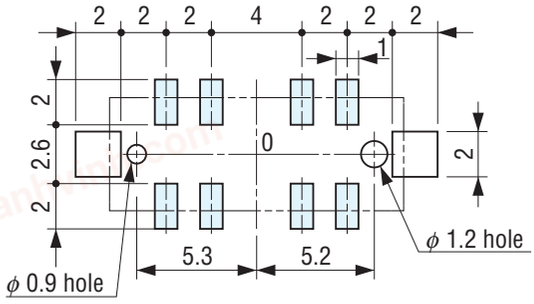


● CMS-23□□B

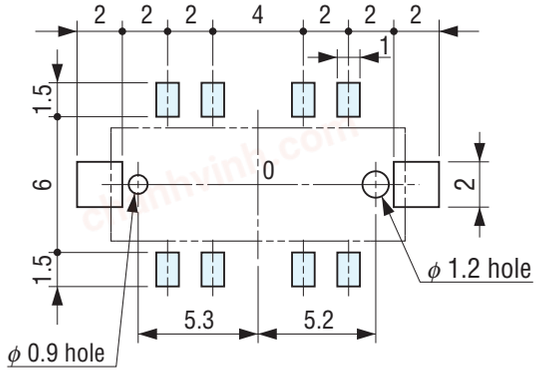


● CMS-24□□A

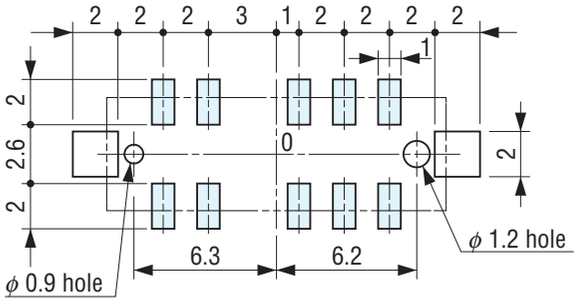


● CMS-24□□B

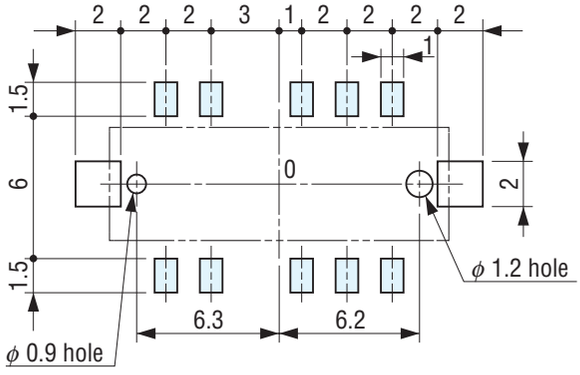

● CMS-42□□A

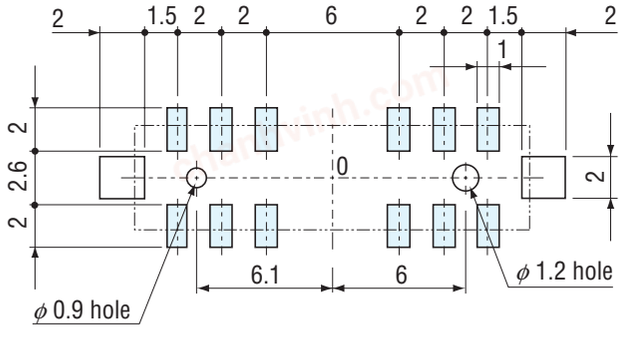

● CMS-42□□B

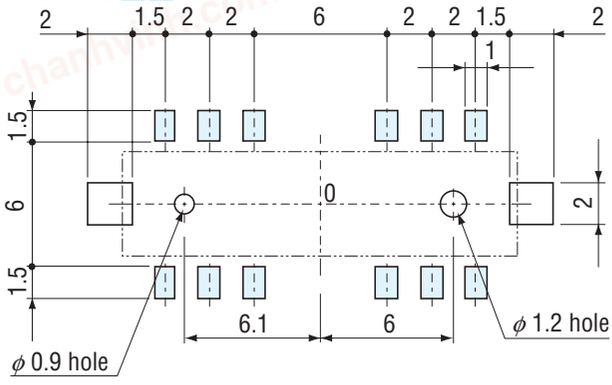

Note) The zero point is the center of mounting.

chanhvinh.com

■ PACKAGING SPECIFICATIONS


<Taping packaging specifications>

● CMS-2 □□□□ type is packaged in 900 pcs. per reel. Orders will be accepted for units of 900 pcs., i.e., 900, 1800, 2700 pcs., etc. CMS-4 type is packaged in packaged in 500 pcs. per reel. Orders will be accepted for units of 500 pcs.

● Taping version is boxed with one reel.


Maximum number of consecutive missing pieces=2
Leader length and reel dimension are shown in the diagrams below:

● Embossed tape dimensions

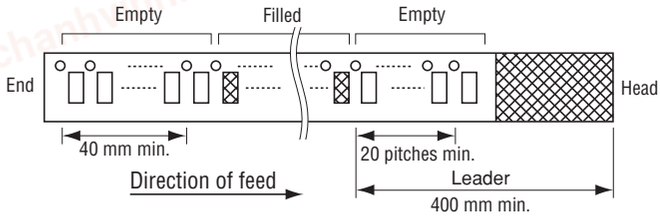


● Reel dimensions

(Unit: mm)
(Conforms to JIS C 0806)
(In accordance with EIAJ ET-7200A)

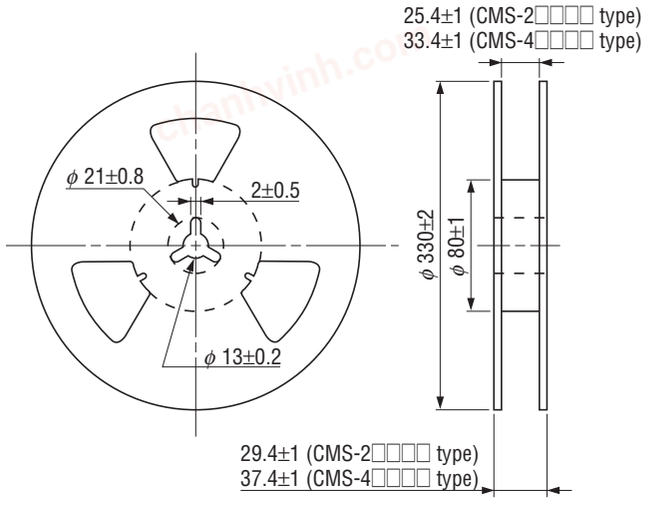

● CMS-2202TA, TB

(Unit : mm)
(Conforms to JIS C 0806)

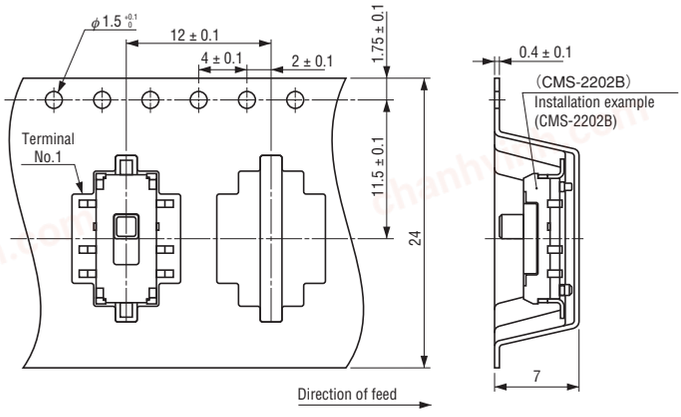


chanhvinh.com

CMS
SLIDE SWITCHES (SMD)

● CMS-2302TA, TB


(Conforms to JIS C 0806)

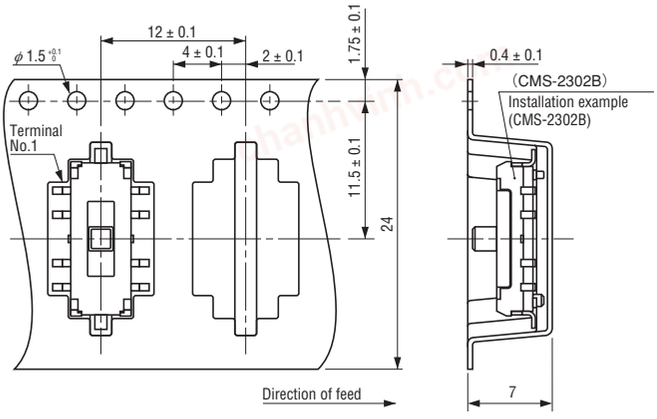

● CMS-2402TA, TB


(Unit : mm)

(Conforms to JIS C 0806)

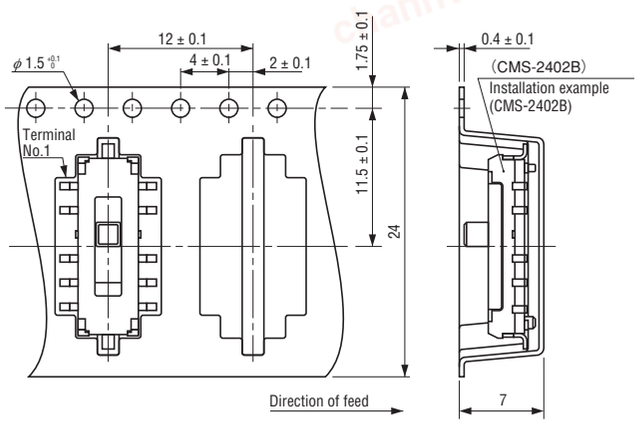


● CMS-2212 • 2214TA, TB

(Conforms to JIS C 0806)

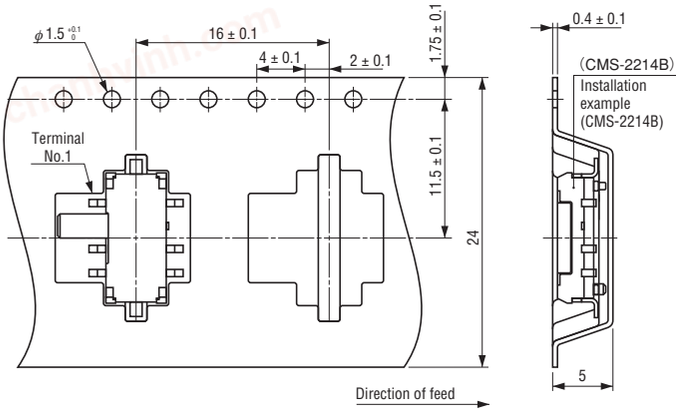


● CMS-2312 • 2314TA, TB

(Conforms to JIS C 0806)

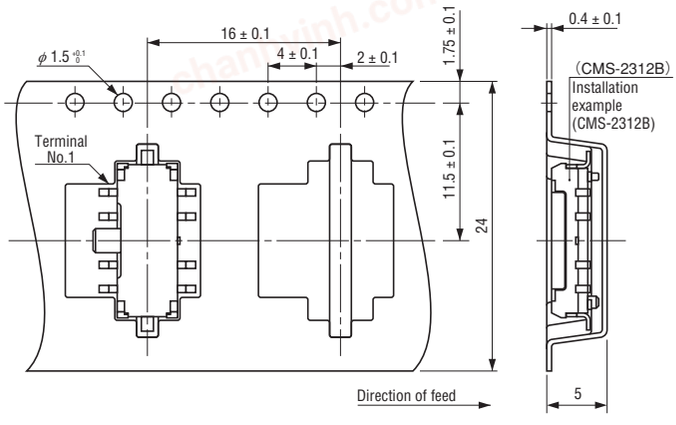


● CMS-2412 • 2414TA, TB

(Conforms to JIS C 0806)

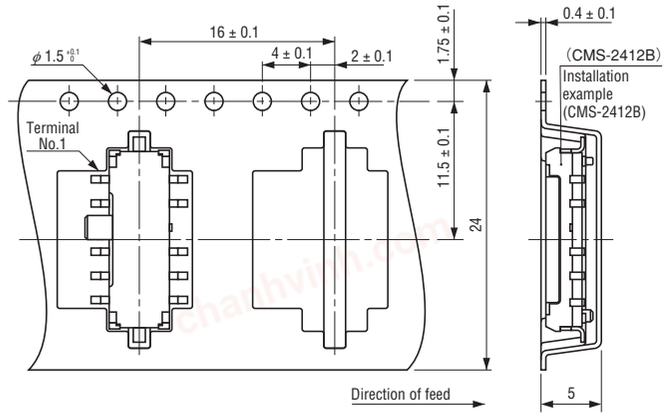

● CMS-4202TA, TB


(Conforms to JIS C 0806)

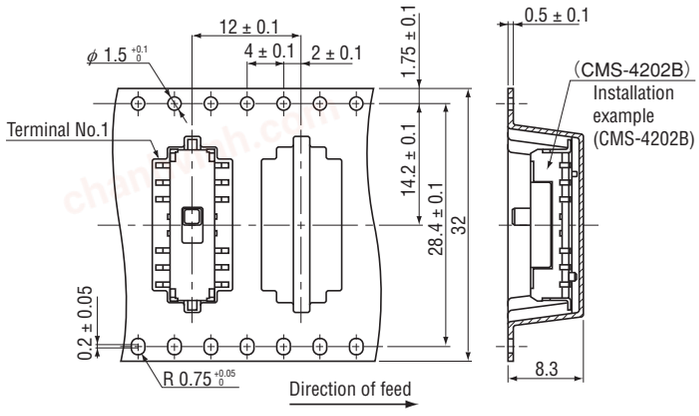

chanhvinh.com

● CMS-4216TA, TB

(Unit : mm)
(Conforms to JIS C 0806)

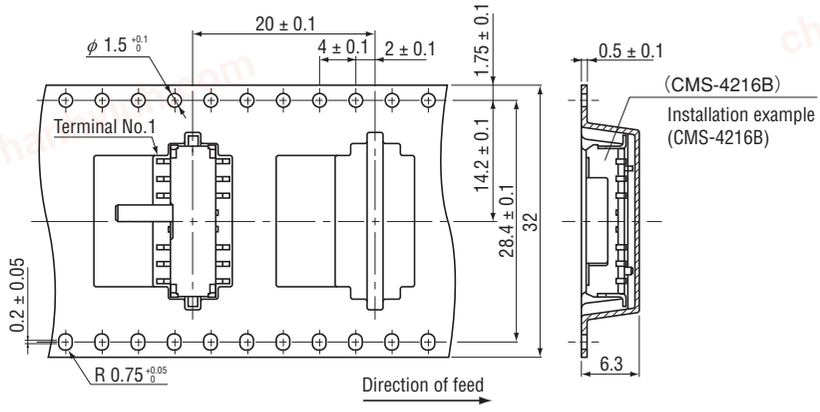

<Tray packaging specifications>

- Tray version is packaged in 50 pcs. per tray. Orders will be accepted for units of 50 pcs., i. e., 50, 100, 150 pcs. etc.
- Tray version is boxed with 10 trays.

<Bulk pack specifications>

- The smallest unit of bulk pack in a plastic bag is 10 pcs. per pack.
  Orders will be accepted for unit of minimum 10 pcs., i.e., 10, 20, 30 pcs., etc.
- Boxing of bulk in plastic bag is performed with 50 pcs. (standard 100 pcs. / CMS-2 □□□□ , 50 pcs. / CMS-4 □□□□) per box.