
chanhvinh.com

OMRON

E3FA PHOTOELECTRIC SENSORS

A new generation in sensing performance

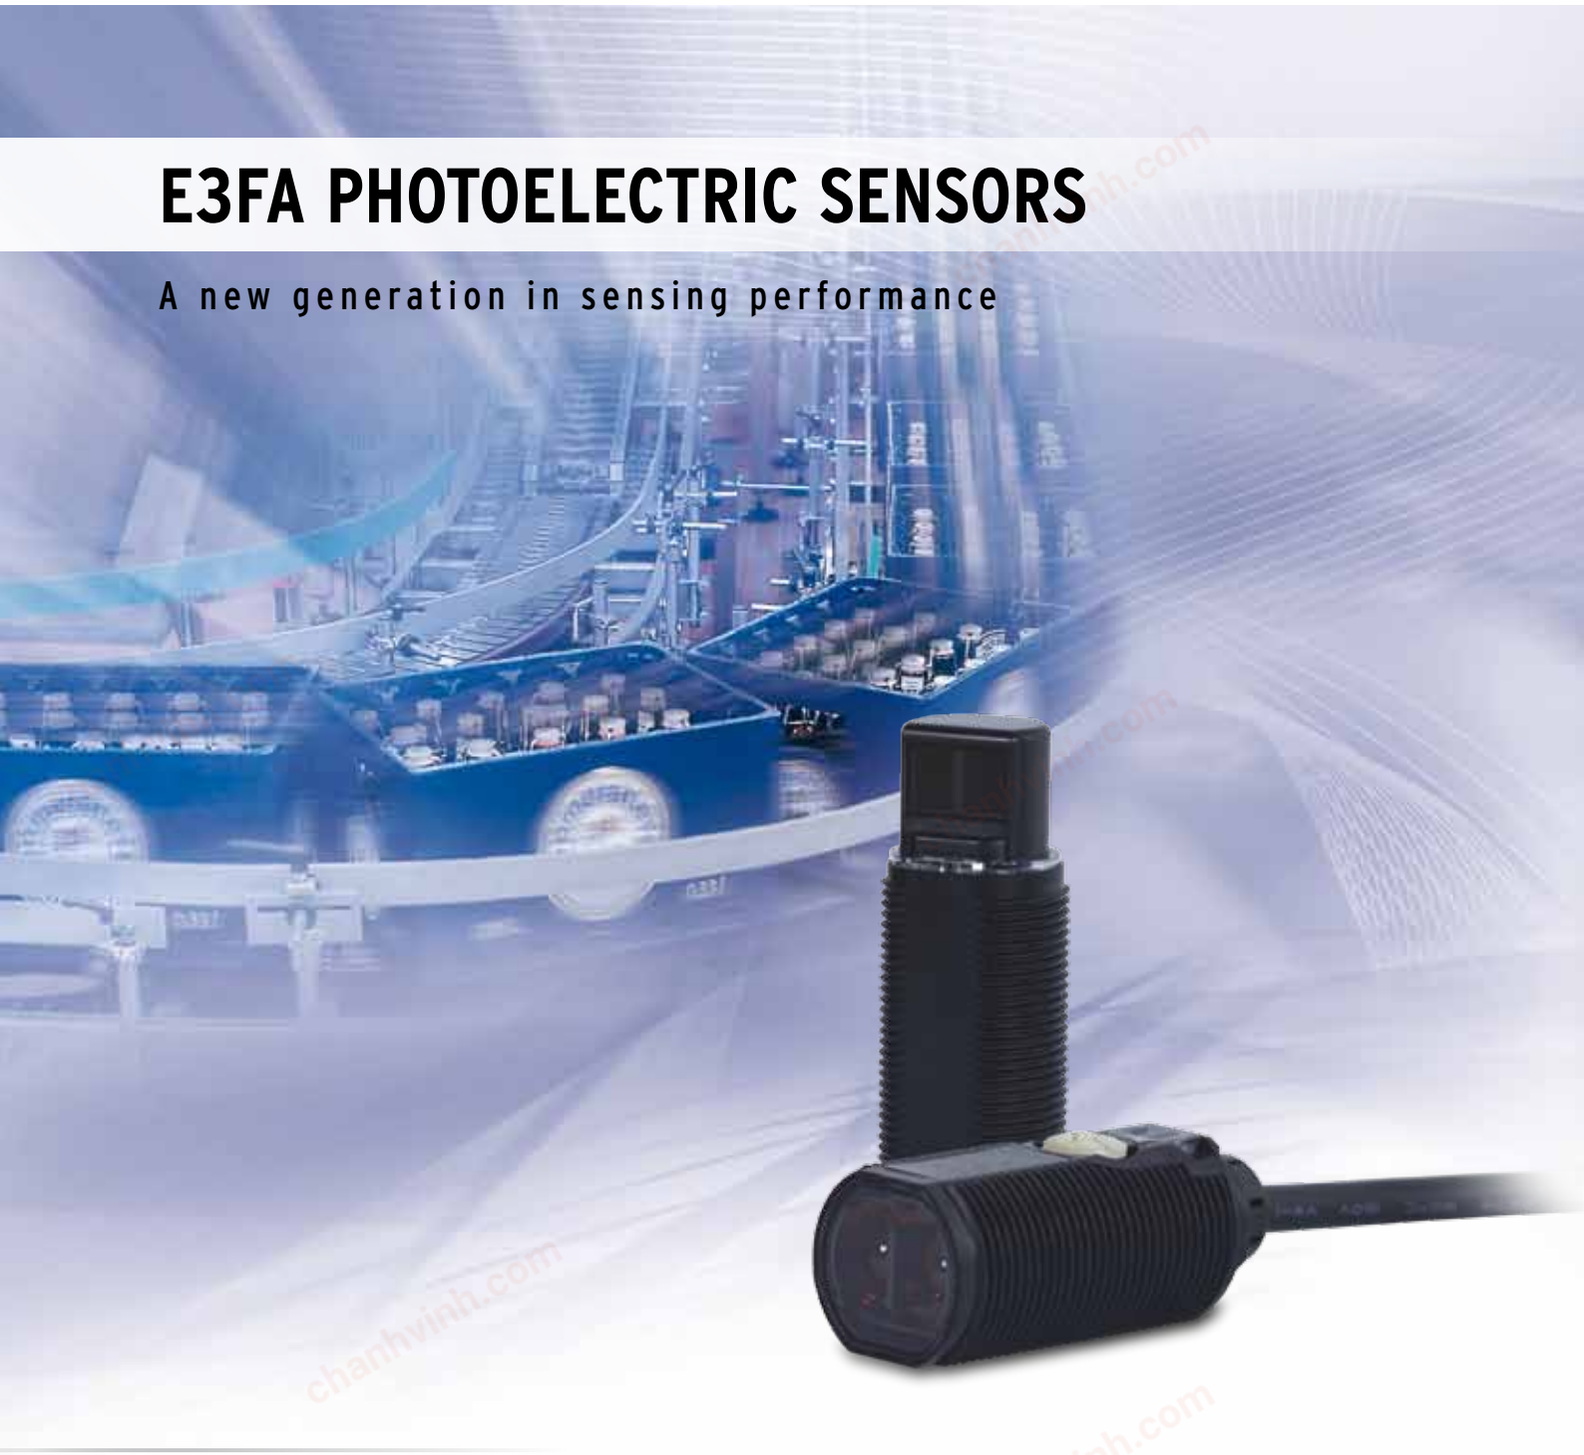

» Simplicity

» One family for all

» Non-stop detection

realizing

chanhvinh.com

A new generation in sensing performance!

Producing more than a million per year, Omron is a world leader in photoelectric sensors. Backed by more than 40 years of experience, Omron is constantly enhancing its portfolio and has now completely redesigned and expanded its popular M18 cylindrical range. Renowned for its high quality and product reliability, Omron's new generation of photoelectric sensors represents one of the largest varieties of dependable and easy-to-use photoelectric sensors on the market. Regardless of your industry or application, the E3FA series has the right sensor for the job at the best price versus performance.

Simplicity

- Simple selection
- Simple installation

One family for all

- All standard applications covered
- A wide variety of models
- Models designed for special applications

Non-stop detection

- High quality and reliability
- High EMC protection
- High light immunity
- Robust and waterproof housing



chanhvinh.com

Simplicity

Omron's compact E3FA series of photoelectric sensors is simple and quick to mount, as well as easy and intuitive to set-up. The large and robust adjuster makes life much easier for installers to adjust the sensor, as does the bright, high-power red LED, which is clearly visible for easy alignment, even over longer distances. Similarly, the sensor's LED status indicator can be viewed from long distances and wide angles.




Compact size and shape. Can be installed almost anywhere.



Visible LED light for easy alignment.



Bright LED indicators for the easy operational status checking.

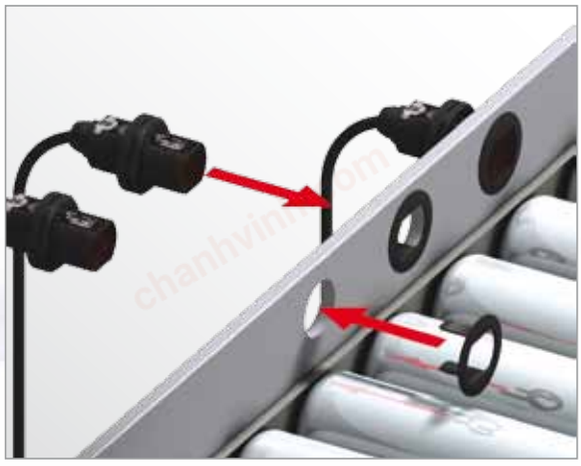

Flush mounting option for smooth installation.

chanhvinh.com

One family for all

Typically installed in industrial plants ranging from food and beverage, textiles, ceramics and brick production, through to logistics, there's always an E3FA model to fit your application. This extensive photoelectric sensor series with high reliability and enhanced performance includes through-beam, retro-reflective and diffuse reflective types in straight and radial versions. Straight versions are also available with background-suppression, limited-reflective detection, and transparent object detection types for special applications.



E3FA Standard Series

Omron's well-known quality is built into this series, which exceeds market standards in terms of reliability and solves a wide range of applications in various industries.



Through-beam	20 m
Retro-reflective	0.1 to 4 m with E39-R1S
Coaxial Retro-reflective	0 to 500 mm with E39-R1S
Diffuse-reflective	100 mm 300 mm 1 m

E3RA Standard Series

E3RA provides a full line-up of radial types that increases mounting flexibility to match specific requirements.



Through-beam	15 m
Retro-reflective	0.1 to 3 m with E39-R1S
Diffuse-reflective	100 mm 300 mm 700 mm

chanhvinh.com


Application specific models



Limited-reflective types suitable for detecting transparant film to shiny, mirror film.



Transparent object detection types utilising Omron's unique technology for detecting objects with birefringent (double refraction) properties.


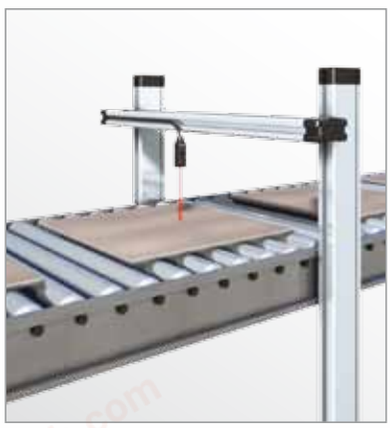


Background suppression types for the stable detection of different objects with various colours.

E3FA Special Models

The E3FA series includes special models to solve demanding applications, for example, in the food and packaging industry.



BGS (background suppression) 	100 mm
	200 mm
Limited distance reflective 	10 to 50 mm
Transparent detection with P-opaquing function 	100 to 500 mm with E39-RP1
Transparent detection with P-opaquing function 	0.1 to 2 m with E39-RP1

chanhvinh.com

Non-stop detection


Especially designed for machines that never stop, the rugged E3FA series offers completely reliable sensing in a robust and waterproof housing that can withstand even high-pressure cleaning. Exceeding market standards, this series also has high EMC protection and light immunity. In addition, there is the added benefit of the high-power LED, which contributes to high sensing stability even in environments with dust or vibrations.



High power LED to compensate for dirt and misalignment.



Pulse synchronisation for high ambient light immunity.

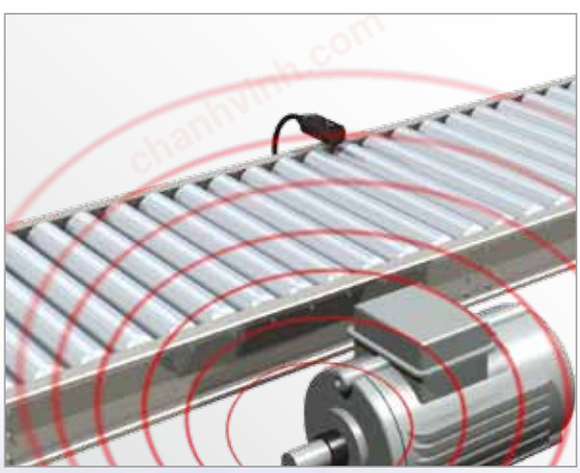

Intensive shielding for high electromagnetic noise immunity.









Tight housing construction for high-level water protection.

chanhvinh.com

Ordering Information

Sensors [Refer to *Dimensions on page 18.*]

Red light

Sensor type	Sensing distance	Connection method	Model	
			NPN output	PNP output
Through-beam *1. 	20 m	pre-wired	**set E3FA-TN11 2M** Emitter E3FA-TN11-L 2M Receiver E3FA-TN11-D 2M	**set E3FA-TP11 2M** Emitter E3FA-TP11-L 2M Receiver E3FA-TP11-D 2M
		M12 connector	**set E3FA-TN21** Emitter E3FA-TN21-L Receiver E3FA-TN21-D	**set E3FA-TP21** Emitter E3FA-TP21-L Receiver E3FA-TP21-D
Retro-reflective *2. 	0.1 to 4 m with E39-R1S	pre-wired	**E3FA-RN11 2M**	**E3FA-RP11 2M**
		M12 connector	**E3FA-RN21**	**E3FA-RP21**
Coaxial Retro-reflective *2. 	0 to 500 mm with E39-R1S	pre-wired	**E3FA-RN12 2M**	**E3FA-RP12 2M**
		M12 connector	**E3FA-RN22**	**E3FA-RP22**
Diffuse-reflective 	100 mm	pre-wired	**E3FA-DN11 2M**	**E3FA-DP11 2M**
		M12 connector	**E3FA-DN21**	**E3FA-DP21**
	300 mm	pre-wired	**E3FA-DN12 2M**	**E3FA-DP12 2M**
		M12 connector	**E3FA-DN22**	**E3FA-DP22**
	1 m	pre-wired	**E3FA-DN13 2M**	**E3FA-DP13 2M**
		M12 connector	**E3FA-DN23**	**E3FA-DP23**
BGS (background suppression) 	100 mm	pre-wired	**E3FA-LN11 2M**	**E3FA-LP11 2M**
		M12 connector	**E3FA-LN21**	**E3FA-LP21**
	200 mm	pre-wired	**E3FA-LN12 2M**	**E3FA-LP12 2M**
		M12 connector	**E3FA-LN22**	**E3FA-LP22**
Limited distance reflective 	10 to 50 mm	pre-wired	**E3FA-VN11 2M**	**E3FA-VP11 2M**
		M12 connector	**E3FA-VN21**	**E3FA-VP21**
Transparent detected with P-opaquing function *2. 	100 to 500 mm with E39-RP1	pre-wired	**E3FA-BN11 2M**	**E3FA-BP11 2M**
		M12 connector	**E3FA-BN21**	**E3FA-BP21**
Transparent detected with P-opaquing function *2. 	0.1 to 2 m with E39-RP1	pre-wired	**E3FA-BN12 2M**	**E3FA-BP12 2M**
		M12 connector	**E3FA-BN22**	**E3FA-BP22**
Through-beam *1. 	15 m	pre-wired	**set E3RA-TN11 2M** Emitter E3RA-TN11-L 2M Receiver E3RA-TN11-D 2M	**set E3RA-TP11 2M** Emitter E3RA-TP11-L 2M Receiver E3RA-TP11-D 2M
		M12 connector	**set E3RA-TN21** Emitter E3RA-TN21-L Receiver E3RA-TN21-D	**set E3RA-TP21** Emitter E3RA-TP21-L Receiver E3RA-TP21-D
Retro-reflective *2. 	0.1 to 3 m with E39-R1S	pre-wired	**E3RA-RN11 2M**	**E3RA-RP11 2M**
		M12 connector	**E3RA-RN21**	**E3RA-RP21**
Diffuse reflective 	100 mm	pre-wired	**E3RA-DN11 2M**	**E3RA-DP11 2M**
		M12 connector	**E3RA-DN21**	**E3RA-DP21**
	300 mm	pre-wired	**E3RA-DN12 2M**	**E3RA-DP12 2M**
		M12 connector	**E3RA-DN22**	**E3RA-DP22**
	700 mm	pre-wired	**E3RA-DN13 2M**	**E3RA-DP13 2M**
		M12 connector	**E3RA-DN23**	**E3RA-DP23**

*1. The set type includes the emitter and receiver.
*2. The Reflector is sold separately. Select the Reflector model most suited to the application.

chanhvinh.com


Reflectors [Refer to *Dimensions on page 19*.]

Reflectors required for Retro-reflective Sensors: A Reflector is not provided with the Sensor. Be sure to order a Reflector separately.

Sensor	Sensing distance	Appearance	Model	Quantity	Remarks
E3FA-R□1	0.1 to 4 m		**E39-R1S**	1	for E3FA-R□ and E3RA-R□
E3FA-R□2	0 to 500 mm				
E3FA-B□1	100 to 500 mm		**E39-RP1**	1	for E3FA-B□
E3FA-B□2	0.1 to 2 m				


Mounting brackets [Refer to *Dimensions on page 19*.]

A Mounting Bracket is not enclosed with the Sensor. Order a Mounting Bracket separately if required.

Sensor	Appearance	Model (Material)	Quantity	Remarks
all types		**E39-L183** (SUS304)	1	Mounting bracket
		**E39-L182** (POM)	1	Flush mounting bracket

Sensor I/O connectors

Models for Connectors: A Connector is not provided with the Sensor. Be sure to order a Connector separately.

Sensor	Size	Cable	Appearance	Cable type		Model
M12 connector types	M12	Standard	Straight 	2 m	4-wire	**XS2F-B12PVC4S2M**
				5 m		**XS2F-B12PVC4S5M**
			Angle 	2 m		**XS2F-B12PVC4A2M**
				5 m		**XS2F-B12PVC4A5M**

Model Number Legend

E3□-□□□□-(□)□

1 2 3 4 5 6 7

1. Series name
FA: Cylindrical, Straight type, Plastic body
RA: Cylindrical, Radial type, Plastic body

2. Sensing method
T: Through-beam
R: Retro-reflective
D: Diffuse-reflective
L: Background suppression
V: Limited distance reflective
B: Transparent detected with P-opaquing function

3. Output
P: PNP
N: NPN

4. Connection
1: Cable
2: Connector, M12, 4-pin

5. Difference of Sensing distance
Sequential number

6. Emitter/Receiver
D: Receiver
L: Emitter

7. Cable length
Blank: Connector type

e.g., E3FA-TP11 2M;
Cylindrical, Straight type, Plastic body/ Through-beam/ PNP/ Cable/ Difference of Sensing distance/ Cable length of 2M
E3RA-TN12-D;
Cylindrical, Radial type, Plastic body/ Through-beam/ NPN/ Connector, M12, 4-pin/ Difference of Sensing distance/ Receiver/ Connector type
E3FA-VP12;
Cylindrical, Straight type, Plastic body/ Limited distance reflective/ PNP/ Connector, M12, 4-pin/ Difference of Sensing distance/ Connector type


chanhvinh.com

Specifications

Straight type

Item	Sensing method		Through-beam	Retro-reflective	Coaxial Retro-reflective	Diffuse-reflective		
Model	NPN output	Pre-wired	E3FA-TN11 2M	E3FA-RN11 2M	E3FA-RN12 2M	E3FA-DN11 2M	E3FA-DN12 2M	E3FA-DN13 2M
		M12 Connector	E3FA-TN21	E3FA-RN21	E3FA-RN22	E3FA-DN21	E3FA-DN22	E3FA-DN23
	PNP output	Pre-wired	E3FA-TP11 2M	E3FA-RP11 2M	E3FA-RP12 2M	E3FA-DP11 2M	E3FA-DP12 2M	E3FA-DP13 2M
		M12 Connector	E3FA-TP21	E3FA-RP21	E3FA-RP22	E3FA-DP21	E3FA-DP22	E3FA-DP23
Sensing distance			20 m	0.1 to 4 m (with E39-R1S)	0 to 500 mm (with E39-R1S)	100 mm (white paper: 300 × 300 mm)	300 mm (white paper: 300 × 300 mm)	1 m (white paper: 300 × 300 mm)
Spot diameter (typical)			—	—	—	40 × 45 mm Sensing distance of 100 mm	40 × 50 mm Sensing distance of 300 mm	120 × 150 mm Sensing distance of 1 m
Standard sensing object			Opaque: 7 mm dia.min.	Opaque: 75 mm dia.min.	Opaque: 75 mm dia.min.	—	—	—
Differential travel			—	—	—	20% max.	—	—
Directional angle			2° min.	2° min.	2° min.	—	—	—
Light source (wavelength)			Red LED (624 nm)					
Power supply voltage			10 to 30 VDC (include voltage ripple of 10%(p-p) max.)					
Current consumption			40 mA max. (Emitter 25 mA max. Receiver 15 mA max.)	25 mA max.				
Control output			NPN/PNP (open collector) Load current: 100 mA max. (Residual voltage: 3 V max.), Load power supply voltage: 30 VDC max.					
Operation mode			Light-ON/Dark-ON selectable by wiring					
Indicator			Operation indicator (orange) Stability indicator (green) Power indicator (green): only Emitter of Through-beam					
Protection circuits			Reversed power supply polarity protection, Output short-circuit protection and Reversed output polarity protection					
Response time			0.5 ms					
Sensitivity adjustment			One-turn adjuster					
Ambient illumination (Receiver side)			Incandescent lamp: 3,000 lx max./ Sunlight: 10,000 lx max.					
Ambient temperature range			Operating: -25 to 55°C/ Storage: -30 to 70°C (with no icing or condensation)					
Ambient humidity range			Operating: 35 to 85%RH/ Storage: 35 to 95%RH (with no condensation)					
Insulation resistance			20 MΩ min. at 500 VDC					
Dielectric strength			1,000 VAC at 50/60 Hz for 1 min. between current-carrying parts and case					
Vibration resistance			Destruction: 10 to 55 Hz, 1.5 mm double amplitude for 2 hours each in X, Y and Z directions					
Shock resistance			Destruction: 500 m/s^2 3 times each in X, Y and Z directions					
Degree of protection			IEC: IP67, DIN 40050-9: IP69K *					
Weight (packed state/only sensor)	Pre-wired cable (2M)		Approx. 110 g/ Approx. 50 g, respectively	Approx. 60 g/ Approx. 50 g				
	Connector		Approx. 30 g/ Approx. 10 g, respectively	Approx. 20 g/ Approx. 10 g				
Material	Case		ABS					
	Lens and Display		PMMA					
	Adjuster		POM					
	Nut		ABS					
Accessories			Instruction sheet M18 nuts (4 pcs)	Instruction sheet M18 nuts (2 pcs)				


* IP69K Degree of Protection Specifications
IP69K is a protection specification stipulated by DIN 40050 Part 9 of the German standards.
The test item is sprayed with 80°C water from a nozzle of a specified shape at a water pressure of 80 to 100 bar. The amount of water is 14 to 16 liters per minute.
The distance between the test item and the nozzle is 10 to 15 cm. The water is discharged at angles of 0°, 30°, 60°, and 90° from the horizontal plane for 30 seconds at each angle while the test item is rotated horizontally.



E3FA/E3RA

Item							
Model	**Sensing method**		**BGS (Background suppression)**		**Limited distance reflective**	**Transparent detected with P-opaquing function**	
	NPN output	**Pre-wired**	**E3FA-LN11 2M**	**E3FA-LN12 2M**	**E3FA-VN11 2M**	**E3FA-BN11 2M**	**E3FA-BN12 2M**
		M12 Connector	**E3FA-LN21**	**E3FA-LN22**	**E3FA-VN21**	**E3FA-BN21**	**E3FA-BN22**
	PNP output	**Pre-wired**	**E3FA-LP11 2M**	**E3FA-LP12 2M**	**E3FA-VP11 2M**	**E3FA-BP11 2M**	**E3FA-BP12 2M**
		M12 Connector	**E3FA-LP21**	**E3FA-LP22**	**E3FA-VP21**	**E3FA-BP21**	**E3FA-BP22**
Sensing distance			100 mm (white paper: 300 × 300 mm)	200 mm (white paper: 300 × 300 mm)	10 to 50 mm (glass(t = 1.0 mm): 150 × 150 mm)	100 to 500 mm (with E39-RP1)	0.1 to 2 m (with E39-RP1)
Spot diameter (typical)			10 × 10 mm Sensing distance of 100 mm	10 × 15 mm Sensing distance of 200 mm	10 × 10 mm Sensing distance of 50 mm	—	—
Standard sensing object			—	—	—	glass(t = 1.0 mm): 150 × 150 mm	glass(t = 1.0 mm): 150 × 150 mm
Differential travel			20% max.		—	—	—
Directional angle			—	—	—	—	—
Light source (wavelength)			Red LED (624 nm)				
Power supply voltage			10 to 30 VDC (include voltage ripple of 10%(p-p) max.)				
Current consumption			25 mA max.				
Control output			NPN/PNP (open collector) Load current: 100 mA max. (Residual voltage: 3 V max.), Load power supply voltage: 30 VDC max.				
Operation mode			Light-ON/Dark-ON selectable by wiring				
Indicator			Operation indicator (orange) Stability indicator (green) Power indicator (green): only Emitter of Through-beam				
Protection circuits			Reversed power supply polarity protection, Output short-circuit protection and Reversed output polarity protection				
Response time			0.5 ms				
Sensitivity adjustment			Fixed		One-turn adjuster		
Ambient illumination (Receiver side)			Incandescent lamp: 3,000 lx max./ Sunlight: 10,000 lx max.				
Ambient temperature range			Operating: -25 to 55°C/ Storage: -30 to 70°C (with no icing or condensation)				
Ambient humidity range			Operating: 35 to 85%RH/ Storage: 35 to 95%RH (with no condensation)				
Insulation resistance			20 MΩ min. at 500 VDC				
Dielectric strength			1,000 VAC at 50/60 Hz for 1 min. between current-carrying parts and case				
Vibration resistance			Destruction: 10 to 55 Hz, 1.5 mm double amplitude for 2 hours each in X, Y and Z directions				
Shock resistance			Destruction: 500 m/s^2 3 times each in X, Y and Z directions				
Degree of protection			IEC: IP67, DIN 40050-9: IP69K *				
Weight (packed state/only sensor)	**Pre-wired cable (2M)**		Approx. 60 g/ Approx. 50 g				
	Connector		Approx. 20 g/ Approx. 10 g				
Material	**Case**		ABS				
	Lens and Display		PMMA				
	Adjuster		POM				
	Nut		ABS				
Accessories			Instruction sheet M18 nuts (2 pcs)				

* IP69K Degree of Protection Specifications
IP69K is a protection specification stipulated by DIN 40050 Part 9 of the German standards.
The test item is sprayed with 80°C water from a nozzle of a specified shape at a water pressure of 80 to 100 bar. The amount of water is 14 to 16 liters per minute.
The distance between the test item and the nozzle is 10 to 15 cm. The water is discharged at angles of 0°, 30°, 60°, and 90° from the horizontal plane for 30 seconds at each angle while the test item is rotated horizontally.




chanhvinh.com

Radial type

Model / Item	Sensing method		Through-beam	Retro-reflective	Diffuse-reflective		
	NPN output	Pre-wired	E3RA-TN11 2M	E3RA-RN11 2M	E3RA-DN11 2M	E3RA-DN12 2M	E3RA-DN13 2M
		M12 Connector	E3RA-TN21	E3RA-RN21	E3RA-DN21	E3RA-DN22	E3RA-DN23
	PNP output	Pre-wired	E3RA-TP11 2M	E3RA-RP11 2M	E3RA-DP11 2M	E3RA-DP12 2M	E3RA-DP13 2M
		M12 Connector	E3RA-TP21	E3RA-RP21	E3RA-DP21	E3RA-DP22	E3RA-DP23
Sensing distance			15 m	0.1 to 3 m (with E39-R1S)	100 mm (white paper: 300 × 300 mm)	300 mm (white paper: 300 × 300 mm)	700 mm (white paper: 300 × 300 mm)
Spot diameter (typical)			—	—	35 × 40 mm Sensing distance of 100 mm	40 × 45 mm Sensing distance of 300 mm	90 × 120 mm Sensing distance of 700 mm
Standard sensing object			Opaque: 7 mm dia.min.	Opaque: 75 mm dia.min.	—	—	—
Differential travel			—	—	20% max.		
Directional angle			2° min.	2° min.	—	—	—
Light source (wavelength)			Red LED (624 nm)				
Power supply voltage			10 to 30 VDC (include voltage ripple of 10%(p-p) max.)				
Current consumption			40mA max. (Emitter 25 mA max. Receiver 15 mA max.)	25 mA max.			
Control output			NPN/PNP (open collector) Load current: 100 mA max. (Residual voltage: 2 V max.), Load power supply voltage: 30 VDC max.				
Operation mode			Light-ON/Dark-ON selectable by wiring				
Indicator			Operation indicator (orange) Stability indicator (green) Power indicator (green): only Emitter of Through-beam				
Protection circuits			Reversed power supply polarity protection, Output short-circuit protection and Reversed output polarity protection				
Response time			0.5 ms				
Sensitivity adjustment			One-turn adjuster				
Ambient illumination (Receiver side)			Incandescent lamp: 3,000 lx max./ Sunlight: 10,000 lx max.				
Ambient temperature range			Operating: -25 to 55°C/ Storage: -30 to 70°C (with no icing or condensation)				
Ambient humidity range			Operating: 35 to 85%RH/ Storage: 35 to 95%RH (with no condensation)				
Insulation resistance			20 MΩ min. at 500 VDC				
Dielectric strength			1,000 VAC at 50/60 Hz for 1 min. between current-carrying parts and case				
Vibration resistance			Destruction: 10 to 55 Hz, 1.5 mm double amplitude for 2 hours each in X, Y and Z directions				
Shock resistance			Destruction: 500 m/s^2 3 times each in X, Y and Z directions				
Degree of protection			IEC: IP67, DIN 40050-9: IP69K *				
Weight (packed state/only sensor)	**Pre-wired cable (2M)**		Approx. 110 g/ Approx. 50 g, respectively	Approx. 60 g/ Approx. 50 g			
	Connector		Approx. 30 g/ Approx. 10 g, respectively	Approx. 20 g/ Approx. 10 g			
Material	**Case**		ABS				
	Lens and Display		PMMA				
	Adjuster		POM				
	Nut		ABS				
Accessories			Instruction sheet M18 nuts (4 pcs)	Instruction sheet M18 nuts (2 pcs)			

* IP69K Degree of Protection Specifications
IP69K is a protection specification stipulated by DIN 40050 Part 9 of the German standards.
The test item is sprayed with 80°C water from a nozzle of a specified shape at a water pressure of 80 to 100 bar. The amount of water is 14 to 16 liters per minute.
The distance between the test item and the nozzle is 10 to 15 cm. The water is discharged at angles of 0°, 30°, 60°, and 90° from the horizontal plane for 30 seconds at each angle while the test item is rotated horizontally.




E3FA/E3RA


Engineering Data (Typical)

Parallel Operating Range


Through-beam Models
E3FA-T□, E3RA-T□

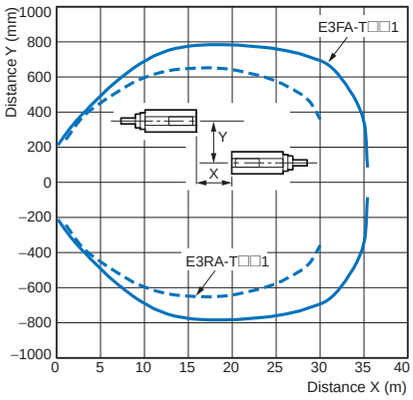


Retro-reflective Models
E3FA-R□1, E3RA-R□1

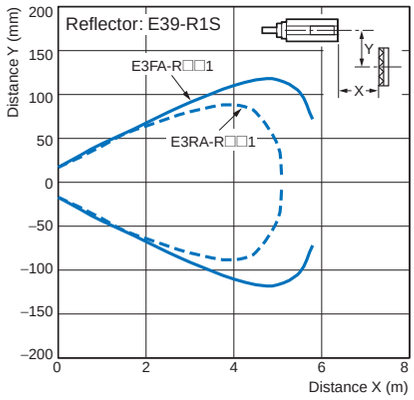


E3FA-R□2

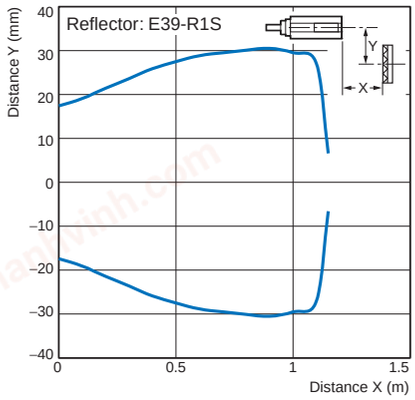

Transparent detected with P-opaquing function
E3FA-B□1

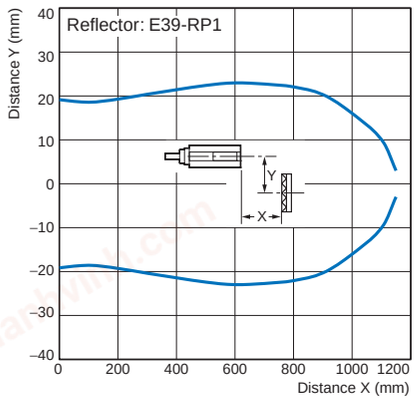


E3FA-B□2

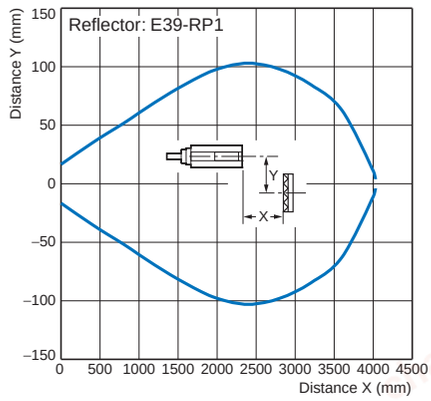


Operating Range


Diffuse-reflective Models
E3FA-D□1, E3FA-D□2
E3RA-D□1, E3RA-D□2

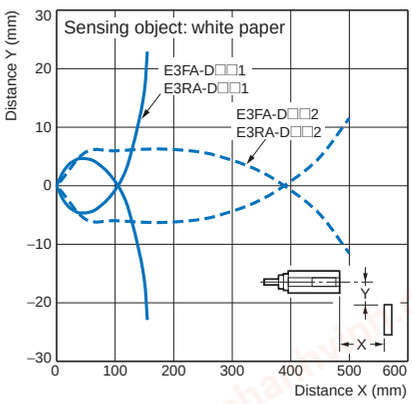


E3FA-D□3, E3RA-D□3

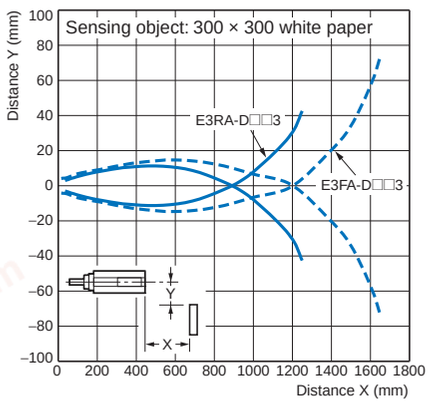


BGS Models
E3FA-L□1

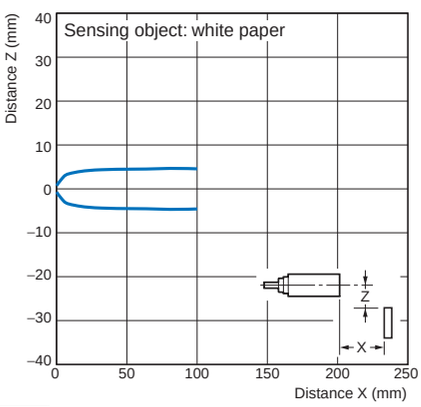

E3FA-L□2

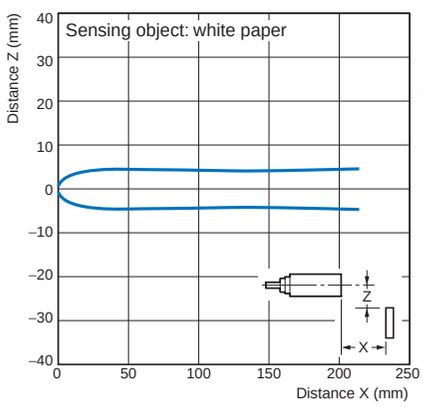


Limited distance reflective
E3FA-V□

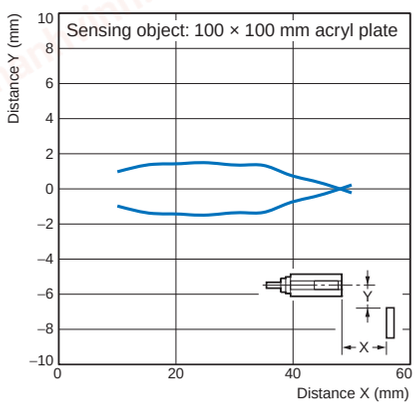


chanhvinh.com

Excess Gain vs. Distance


Through-beam Models
E3FA-T□, E3RA-T□

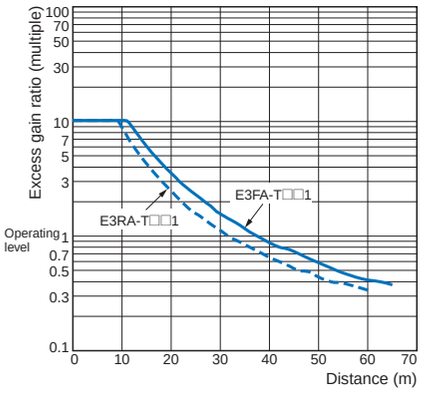


Retro-reflective Models
E3FA-R□1, E3RA-R□1

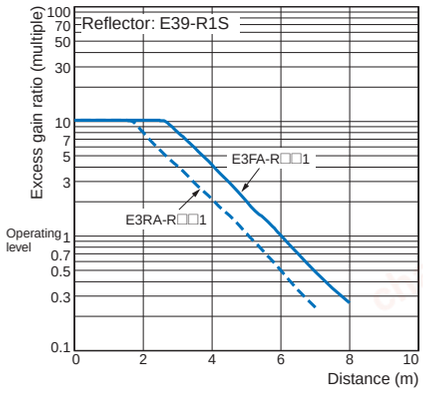


E3FA-R□2

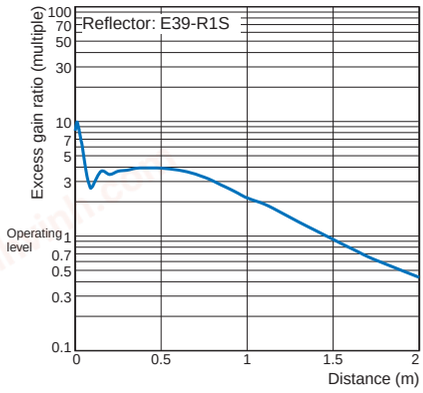


Diffuse reflective Models
E3FA-D□1, E3FA-D□2
E3RA-D□1, E3RA-D□2

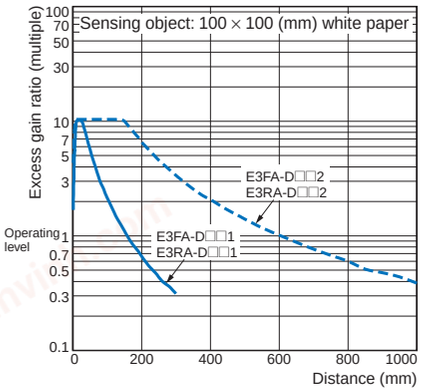


E3FA-D□3, E3RA-D□3

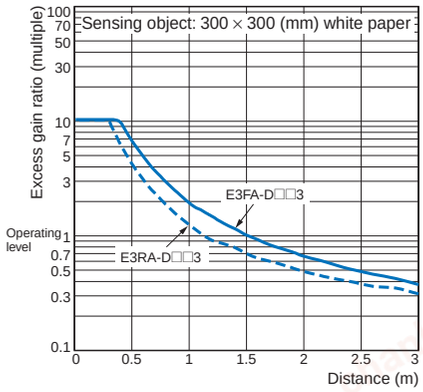


Transparent detected with P-opaquing function
E3FA-B□1

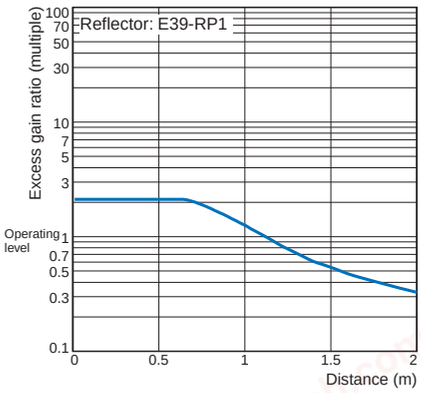

E3FA-B□2

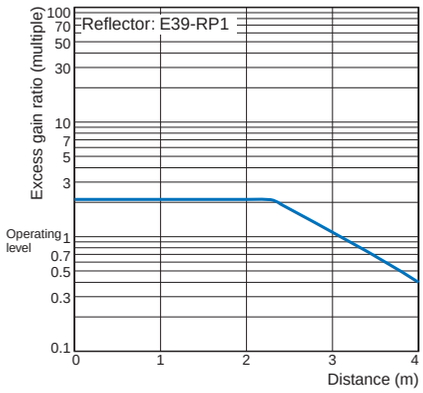


Limited distance reflective
E3FA-V□

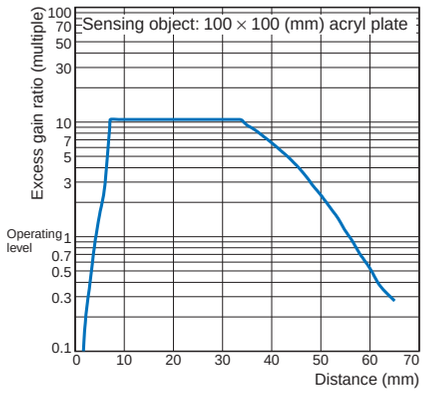


Sensing Object Size vs. Distance

Diffuse reflective Models
E3FA-D□1, E3FA-D□2
E3RA-D□1, E3RA-D□2

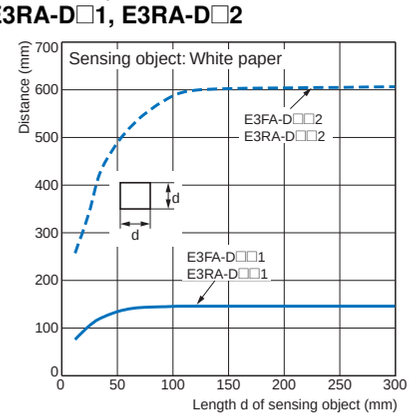

E3FA-D□3, E3RA-D□3

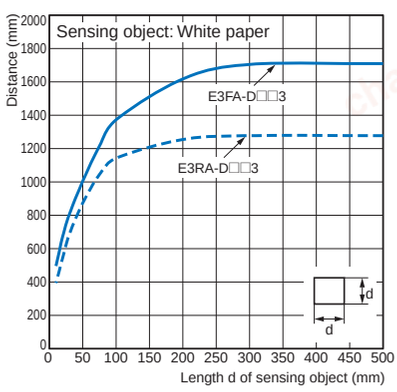


chanhvinh.com


Sensing Distance vs. Sensing Object Material

BGS Models

E3FA-L□1

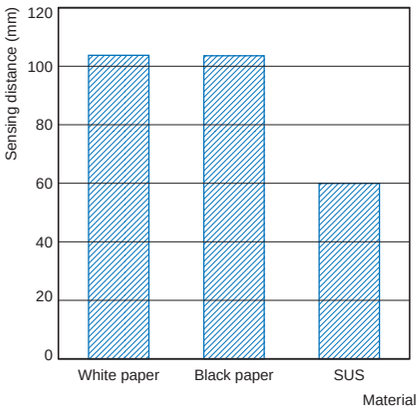


E3FA-L□2

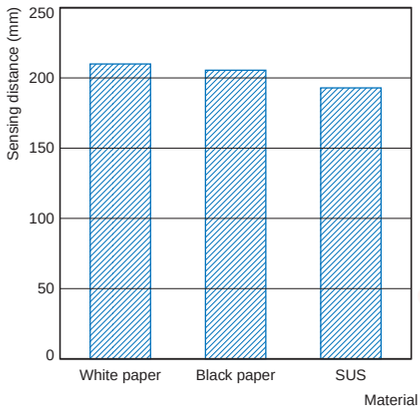


Dark Excess Gain vs. Sensing Object Characteristics

Transparent detected with P-opaquing function

E3FA-B□1

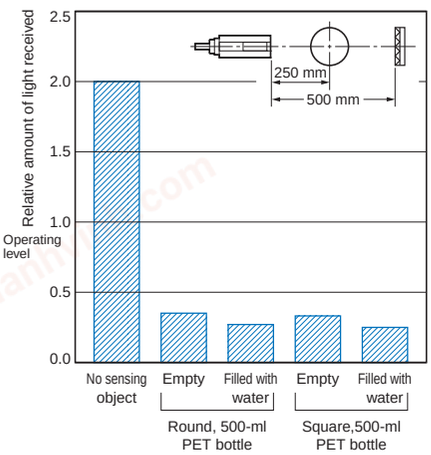








E3FA-B□2

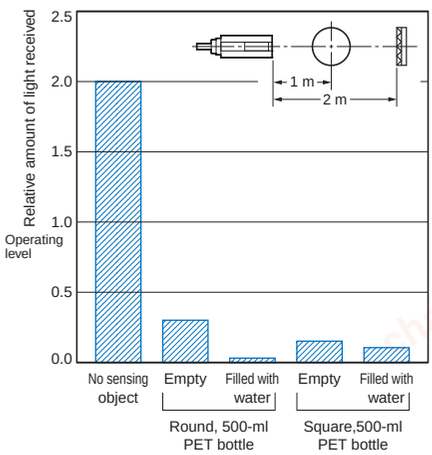

chanhvinh.com








Output circuit diagram

PNP Output
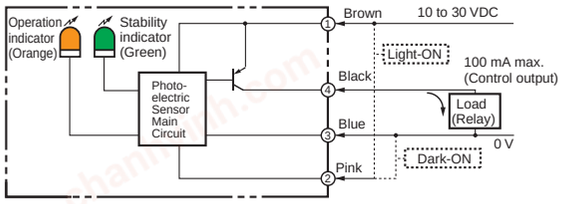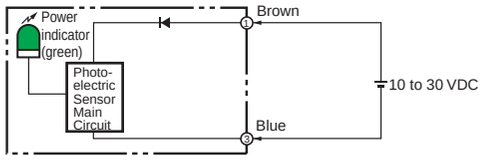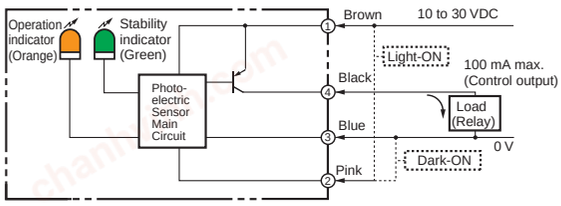
<table>
<tr><th>Model</th><th>Operation mode</th><th>Timing charts</th><th>Operation selector</th><th>Output circuit</th></tr>
<tr><td rowspan="3">E3FA-TP□
E3FA-RP□
E3FA-DP□
E3FA-VP□
E3FA-BP□
E3RA-TP□
E3RA-RP□
E3RA-DP□</td><td>Light-ON</td><td>
</td><td>Connect the pink wire (Pin(2)) to the brown (Pin(1))</td><td rowspan="2">Through-beam Receivers, Retro-reflective Models, Diffuse-reflective Models, Limited reflective Models. Transparent detected with P-opaquing function.

</td></tr>
<tr><td>Dark-ON</td><td>
</td><td>Connect the pink wire (Pin(2)) to the blue (Pin(3)) or open the pink wire (Pin(2))</td></tr>
<tr><td colspan="4">Through-beam Emitter

</td></tr>
<tr><td rowspan="2">E3FA-LP□</td><td>Light-ON</td><td>
</td><td>Connect the pink wire (Pin(2)) to the brown (Pin(1))</td><td rowspan="2">Background suppression.
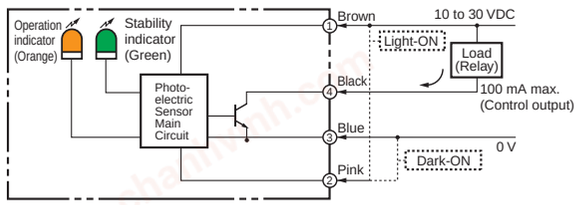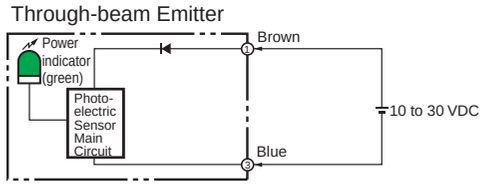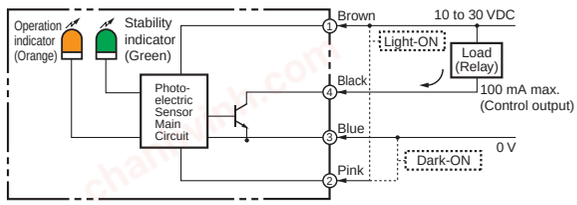
</td></tr>
<tr><td>Dark-ON</td><td>
</td><td>Connect the pink wire (Pin(2)) to the blue (Pin(3)) or open the pink wire (Pin(2))</td></tr>
</table>

E3FA/E3RA

NPN Output

Model	Operation mode	Timing charts	Operation selector	Output circuit
E3FA-TN□ E3FA-RN□ E3FA-DN□ E3FA-VN□ E3FA-BN□ E3RA-TN□ E3RA-RN□ E3RA-DN□	Light-ON		Connect the pink wire (Pin(2)) to the brown (Pin(1)) or open the pink wire (Pin(2))	Through-beam Receivers, Retro-reflective Models, Diffuse-reflective Models, Limited reflective Models. Transparent detected with P-opaquing function. 
	Dark-ON		Connect the pink wire (Pin(2)) to the blue (Pin(3))	
		Through-beam Emitter 		
E3FA-LN□	Light-ON		Connect the pink wire (Pin(2)) to the brown (Pin(1)) or open the pink wire (Pin(2))	Background suppression. 
	Dark-ON		Connect the pink wire (Pin(2)) to the blue (Pin(3))	


Connector Pin Arrangement

M12 Connector Pin Arrangement



Connectors (Sensor I/O connectors)

M12 4-wire Connectors

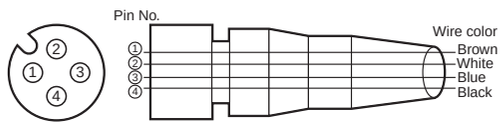


Classification	Wire color	Connector pin No.	Application
DC	Brown	①	Power supply (+V)
	White	②	L/on · D/on selectable
	Blue	③	Power supply (0 V)
	Black	④	Output


chanhvinh.com

Nomenclature

Straight
with an adjuster:
E3FA-T□-D
E3FA-R□
E3FA-D□
E3FA-V□
E3FA-B□
without an adjuster:
E3FA-T□-L *
E3FA-L□

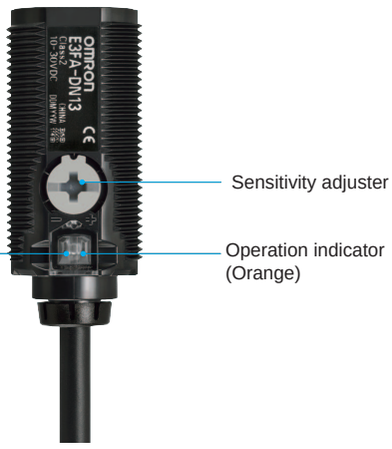

Radial
with an adjuster:
E3RA-T□-D
E3RA-R□
E3RA-D□
without an adjuster:
E3RA-T□-L *

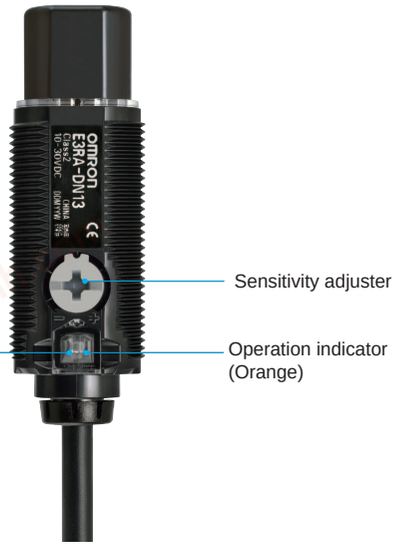

* The Emitter has two Power indicators (Green) instead of the Stability indicator (Green) and the Operation indicator (Orange).

Safety Precautions

Refer to *Warranty and Limitations of Liability*.

⚠ WARNING

This product is not designed or rated for directly or indirectly ensuring safety of persons. Do not use it for such a purpose.



⚠ CAUTION

Never use the product with an AC power supply.
Do not use the product with voltage in excess of the rated voltage.



Do not use the product with incorrect wiring.
Otherwise, explosion, fire, malfunction may result.



Precautions for Safe Use

Be sure to follow the safety precautions below for added safety.

1. Do not use the sensor under the environment with explosive, flammable or corrosive gas.
2. Do not use the sensor under the oil or chemical environment.
3. Do not use the sensor in the water, rain or outdoors.
4. Do not use the sensor in the environment where humidity is high and condensation may occur.
5. Do not use the sensor under the environment under the other conditions in excess of rated.
6. Do not use the sensor in place that is exposed by direct sunlight.
7. Do not use the sensor in place where the sensor may receive direct vibration or shock.
8. Do not use the thinner, alcohol, or other organic solvents.
9. Never disassemble, repair nor tamper with the sensor.
10. Please process it as industrial waste.

Precautions for Correct Use

1. Laying Sensor wiring in the same conduit or duct as high-voltage wires or power lines may result in malfunction or damage due to conduit or use shielded cable.
2. Do not pull on the cable with excessive force.
3. If a commercial switching regulator is used, ground the FG (frame ground) terminal.
4. The sensor will be available 100 ms after the power supply is tuned ON. Start to use the sensor 100 ms or more after turning ON the power supply. If the load and the sensor are connected to separate power supplies, be sure to turn ON the sensor first.
5. Output pulses may be generated even when the power supply is OFF. Therefore, it is recommended to first turn OFF the power supply for the load or the load line.
6. The sensor must be mounted using the provided nuts. The proper tightening torque range is between 0.4 and 0.5 N·m.

chanhvinh.com

E3FA/E3RA

Dimensions


(Unit: mm)
Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.

Sensors

E3FA series
Pre-wired Models
E3FA-T□11
E3FA-R□1□
E3FA-D□1□
E3FA-L□1□
E3FA-V□11
E3FA-B□1□




Left side view




Suitable models
E3FA-T□11
E3FA-R□12
E3FA-B□11

Left side view




Suitable models
E3FA-R□11
E3FA-D□1□
E3FA-L□1□
E3FA-V□11
E3FA-B□12

Front view



*** Suitable models**
E3FA-T□11-D
E3FA-R□12
E3FA-D□1□
E3FA-V□11
E3FA-B□12


Mounting Holes



E3FA series
M12 Connector Models
E3FA-T□21
E3FA-R□2□
E3FA-D□2□
E3FA-L□2□
E3FA-V□21
E3FA-B□2□




Left side view




Suitable models
E3FA-T□21
E3FA-R□22
E3FA-B□21

Left side view




Suitable models
E3FA-R□21
E3FA-D□2□
E3FA-L□2□
E3FA-V□21
E3FA-B□22

Front view




Right side view



*** Suitable models**
E3FA-T□21-D
E3FA-R□22
E3FA-D□2□
E3FA-V□21
E3FA-B□22

Mounting Holes




Terminal No.	Specification
1	+V
2	L/on · D/on selectable
3	0V
4	Output

E3RA series
Pre-wired Models
E3RA-T□11
E3RA-R□11
E3RA-D□1□




Rear view

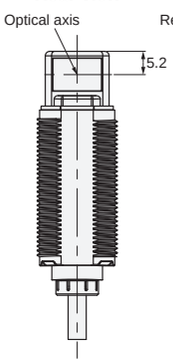


Suitable models
E3RA-T□11

Rear view

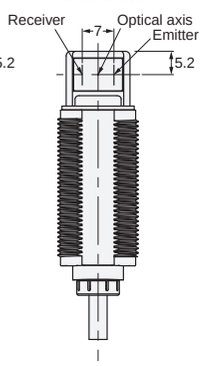


Suitable models
E3RA-R□11
E3RA-D□1□

Front view

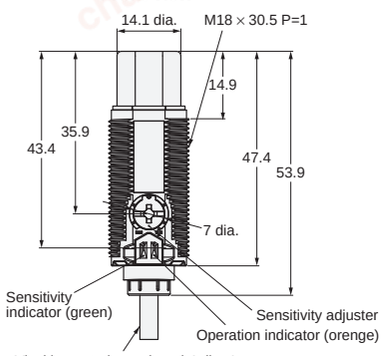


Mounting Holes



E3RA series
M12 Connector Models
E3RA-T□21
E3RA-R□21
E3RA-D□2□




Rear view

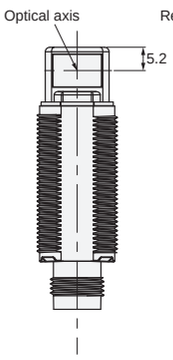


Suitable models
E3RA-T□21

Rear view

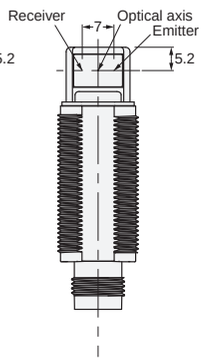


Suitable models
E3RA-R□21
E3RA-D□2□


Front view

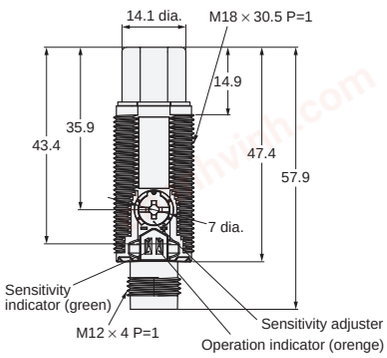

Bottom view




Mounting Holes



Terminal No.	Specification
1	+V
2	L/on · D/on selectable
3	0V
4	Output

chanhvinh.com


Attached nut

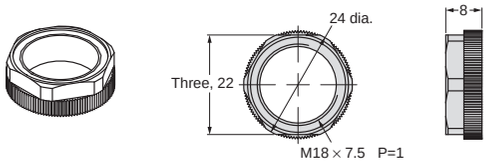


Accessories (Order Separately)

Reflectors

E39-R1S

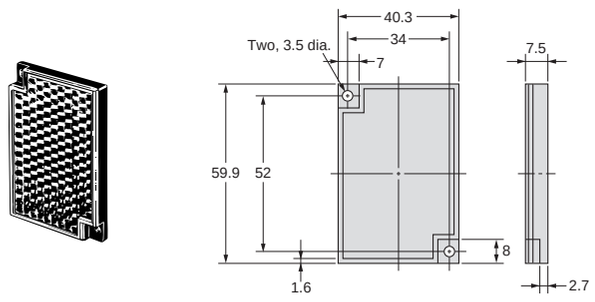


E39-RP1

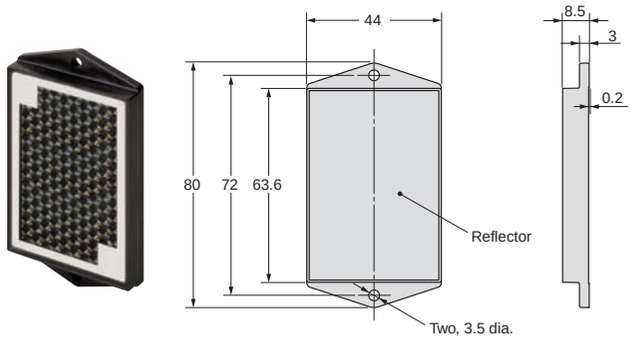


Mounting brackets

E39-L183

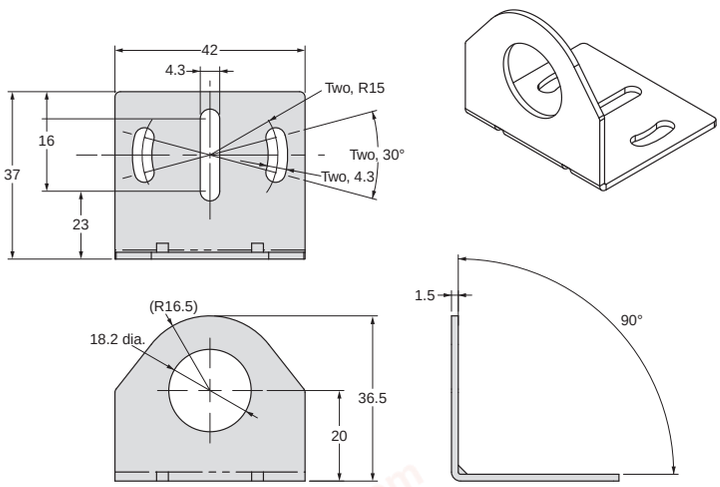

Mounting brackets

E39-L182

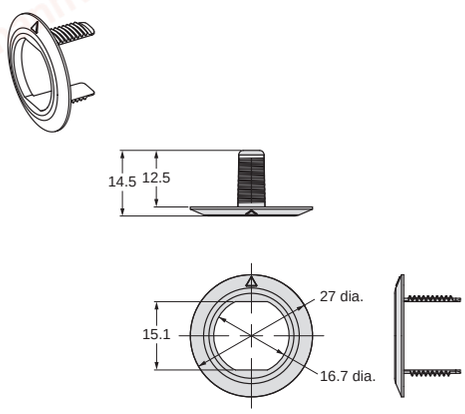

chanhvinh.com

READ AND UNDERSTAND THIS DOCUMENT

Please read and understand this document before using the products. Please consult your OMRON representative if you have any questions or comments.

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

SUITABILITY FOR USE

THE PRODUCTS CONTAINED IN THIS DOCUMENT ARE NOT SAFETY RATED. THEY ARE NOT DESIGNED OR RATED FOR ENSURING SAFETY OF PERSONS, AND SHOULD NOT BE RELIED UPON AS A SAFETY COMPONENT OR PROTECTIVE DEVICE FOR SUCH PURPOSES. Please refer to separate catalogs for OMRON's safety rated products.

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the product.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PERFORMANCE DATA

Performance data given in this document is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the product may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

COPYRIGHT AND COPY PERMISSION

This document shall not be copied for sales or promotions without permission.

This document is protected by copyright and is intended solely for use in conjunction with the product. Please notify us before copying or reproducing this document in any manner, for any other purpose. If copying or transmitting this document to another, please copy or transmit it in its entirety.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON Corporation **Industrial Automation Company**
Tokyo, JAPAN
Contact: www.ia.omron.com

Regional Headquarters
OMRON EUROPE B.V.
Sensor Business Unit
Carl-Benz-Str. 4, D-71154 Nufringen, Germany
Tel: (49) 7032-811-0/Fax: (49) 7032-811-199

OMRON ELECTRONICS LLC
One Commerce Drive Schaumburg,
IL 60173-5302 U.S.A.
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

OMRON ASIA PACIFIC PTE. LTD.
No. 438A Alexandra Road # 05-05/08 (Lobby 2),
Alexandra Technopark,
Singapore 119967
Tel: (65) 6835-3011/Fax: (65) 6835-2711

OMRON (CHINA) CO., LTD.
Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

Authorized Distributor:

© OMRON Corporation 2012 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.

Printed in Japan
Cat. No. E423-E1-01 0612(0612)