
chanhvinh.com

G3VM-□WR

MOS FET Relays **P-SON 4-pin, High-Current and Low-ON-Resistance Type**

New Non-Leaded, High-Current P-SON Package

- **Load voltage 30 V/60 V/100 V.**
- **30 V relay: Continuous load current of 4.5 A max.**
- **60 V relay: Continuous load current of 3 A max.**
- **100 V relay: Continuous load current of 2 A max.**
- **High Ambient operating temperature: -40°C to +110°C**

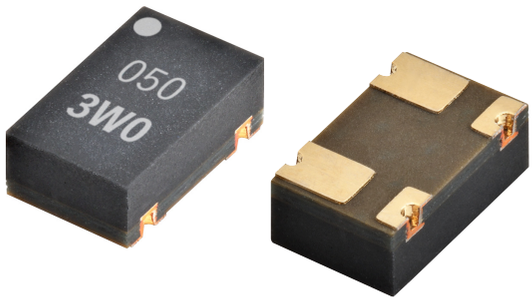

Note: The actual product is marked differently from the image shown above.


RoHS Compliant

■Application Examples

- **Semiconductor test equipment**
- **Test & measurement equipment**
- **Communication equipment**
- **Data loggers**

■Package (Unit : mm, average)

P-SON 4-pin



Note: The actual product is marked differently from the image shown above.

■Model Number Legend

G3VM-□□□□
1 2 3 4

1. Load voltage
3: 30 V
6: 60 V
10: 100 V

2. Contact form
1: 1a (SPST-NO)

3. Package type
W: P-SON 4-pin

4. Additional functions
R: Low on-resistance

■Ordering Information

Package type	Contact form	Terminals	Load voltage (peak value) ✻	Continuous load current (peak value) ✻	Packing/Tape cut		Packing/Tape & reel	
					Model	Minimum package quantity	Model	Minimum package quantity
P-SON4	1a (SPST-NO)	Surface-mounting Terminals	30 V	4.5 A	**G3VM-31WR**	1 pc.	**G3VM-31WR (TR05)**	500 pcs.
			60 V	3 A	**G3VM-61WR**		**G3VM-61WR (TR05)**	
			100 V	2 A	**G3VM-101WR**		**G3VM-101WR (TR05)**	

✻ The AC peak and DC value are given for the load voltage and continuous load current.
Note: When ordering tape packing, add "(TR05)" (500 pcs/reel) to the model number.
Ask your OMRON representative for orders under 500 pcs. We can supply products with the tape already cut.
Tape-cut P-SON is packaged without humidity resistance. Use manual soldering to mount them.
Refer to common precautions.

chanhvinh.com

■Absolute Maximum Ratings (Ta = 25°C)


Item		Symbol	G3VM-31WR	G3VM-61WR	G3VM-101WR	Unit	Measurement conditions
Input	LED forward current	I_F	30			mA	
	LED forward current reduction rate	ΔI_F/°C	−0.3			mA/°C	Ta≥25°C
	LED reverse voltage	V_R	6			V	
	Connection temperature	T_J	125			°C	
Output	Load voltage (AC peak/DC)	V_{OFF}	30	60	100	V	
	Continuous load current (AC peak/DC)	I_O	4.5	3	2	A	
	ON current reduction rate	ΔI_O/°C	−45	−30	−20	mA/°C	Ta≥25°C
	Pulse ON current	I_{OP}	10	9	6	A	t=100 ms, Duty=1/10
	Connection temperature	T_J	125			°C	
Dielectric strength between I/O ✻		V_{I-O}	500			Vrms	AC for 1 min
Ambient operating temperature		Ta	−40 to +110			°C	With no icing or condensation
Ambient storage temperature		Tstg	−40 to +125			°C	
Soldering temperature		–	260			°C	10 s

✻ The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■Electrical Characteristics (Ta = 25°C)

Item		Symbol		G3VM-31WR	G3VM-61WR	G3VM-101WR	Unit	Measurement conditions
Input	LED forward voltage	V_F	Minimum	1.1			V	I_F=10 mA
			Typical	1.22	1.22	1.22		
			Maximum	1.4				
	Reverse current	I_R	Maximum	10			μA	V_R=5 V
	Capacity between terminals	C_T	Typical	70			pF	V=0, f=1 MHz
	Trigger LED forward current	I_{FT}	Typical	1		0.9	mA	I_O=1 A
			Maximum	3				
	Release LED forward current	I_{FC}	Minimum	0.1			mA	I_{OFF}=10 μA
			Typical	0.9		0.8		
Output	Maximum resistance with output ON	R_{ON}	Typical	25	45	130	mΩ	I_O=Continuous load current rated value I_F=5 mA, t<1 s
			Maximum	50	100	200		
	Current leakage when the relay is open	I_{LEAK}	Maximum	1000 (10)			nA	V_{OFF}= Load voltage rated value 31WR :(V_{OFF}=20 V) 61WR :(V_{OFF}=40 V) 101WR :(V_{OFF}=80 V)
	Capacity between terminals	C_{off}	Typical	450	250	170	pF	V=0 V, f=1 MHz
Capacity between I/O terminals		C_{I-O}	Typical	1			pF	f=1 MHz, V_S=0 V
Insulation resistance between I/O terminals		R_{I-O}	Typical	10^8			MΩ	V_{I-O}=500 VDC, RoH≤60%
Turn-ON time		t_{ON}	Typical	3		2	ms	I_F=5 mA, R_L=200 Ω, V_{DD}=10 V (G3VM-31WR) V_{DD}=20 V (G3VM-61WR/101WR) ✻
			Maximum	5		3		
Turn-OFF time		t_{OFF}	Typical	0.04		0.03		
			Maximum	1				

✻ Turn-ON and Turn-OFF Times

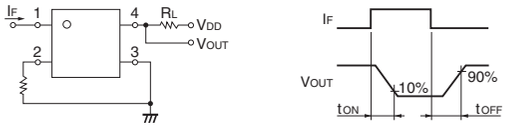

■Recommended Operating Conditions

For high reliability usage, Recommended Operation Conditions are measures that take into account the derating of Absolute Maximum Ratings and Electrical Characteristics.


Each item on this list is an independent condition, so it is not simultaneously satisfying several conditions.

Item	Symbol		G3VM-31WR	G3VM-61WR	G3VM-101WR	Unit
Load voltage (AC peak/DC)	V_{DD}	Maximum	24	48	80	V
Operating LED forward current	I_F	Typical	5			mA
		Maximum	20			
Continuous load current (AC peak/DC)	I_O	Maximum	4.5	3	2	A
Ambient operating temperature	Ta	Minimum	−20			°C
		Maximum	85			


chanhvinh.com

■Engineering Data


●LED forward current vs. ambient temperature

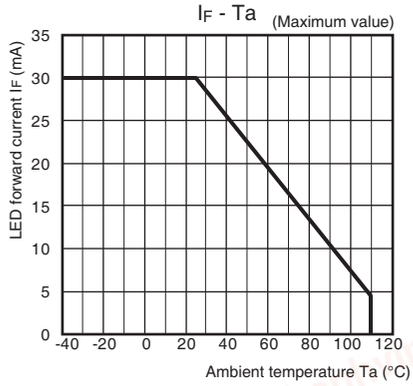


●Continuous load current vs. ambient temperature

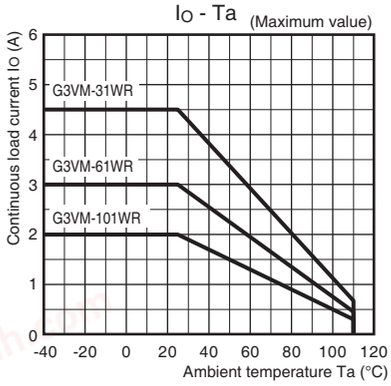


●LED forward current vs. LED forward voltage

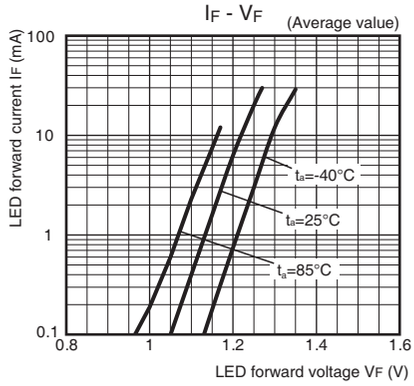


●Continuous load current vs. on-state voltage

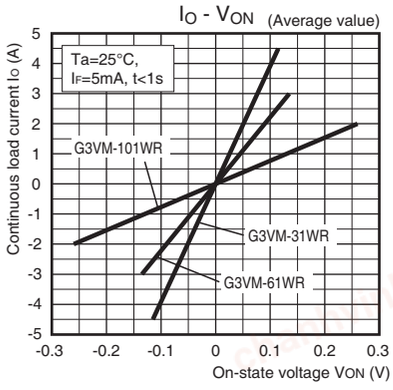


●On-state resistance vs. ambient temperature

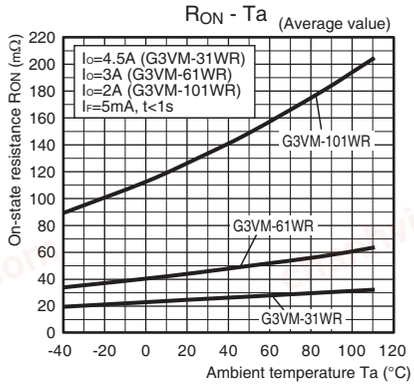


●Trigger LED forward current vs. ambient temperature

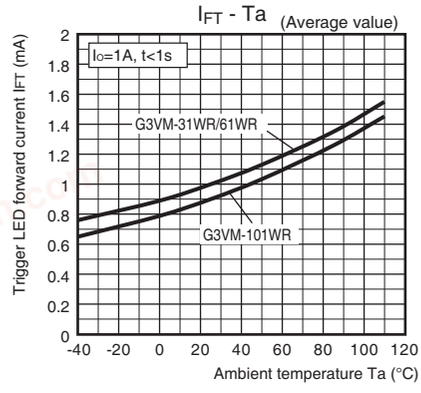


●Turn ON, turn OFF time vs. LED forward current

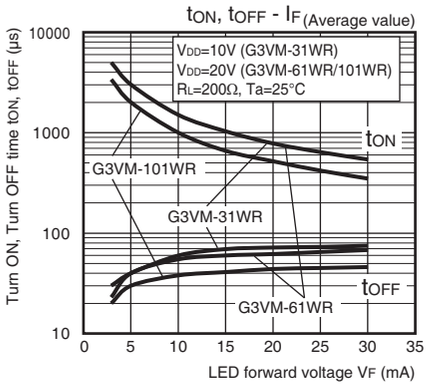


●Turn ON, turn OFF time vs. ambient temperature

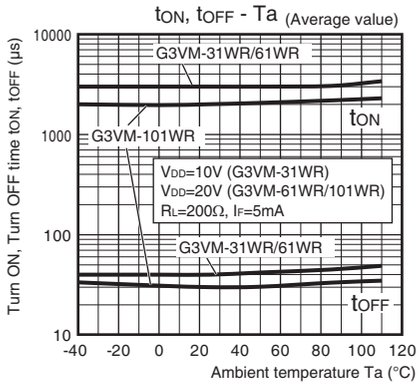


●Current leakage vs. load voltage

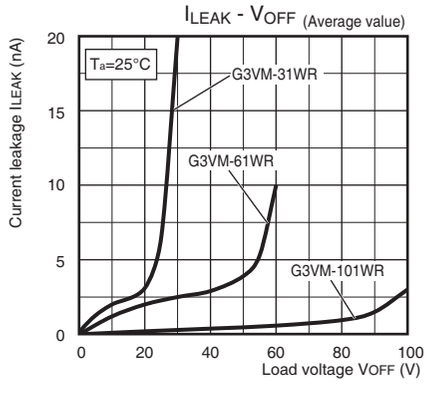

●Current leakage vs. ambient temperature

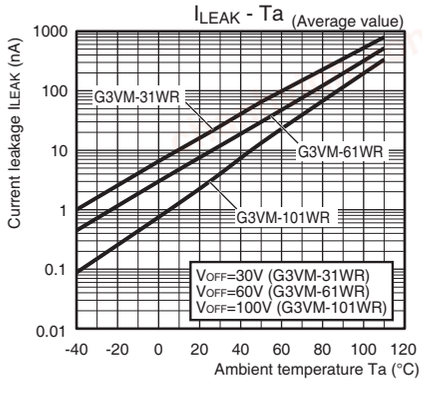

●Output terminal capacitance vs. load voltage

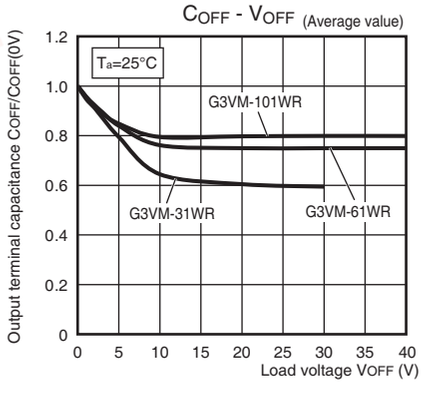


chanhvinh.com

■Appearance / Terminal Arrangement / Internal Connections

■Appearance

P-SON (Power - Small Outline Non-Leaded)


P-SON 4-pin



✻ Actual model name marking for each model

Model	Marking
G3VM-31WR	3W0
G3VM-61WR	6W0
G3VM-101WR	AW0

■Terminal Arrangement/Internal Connections (Top View)





Note 1. The actual product is marked differently from the image shown above.
2. "G3VM" does not appear in the model number on the relay.

■Dimensions (Unit: mm)

Surface-Mounting Terminals


Weight: 0.02 g



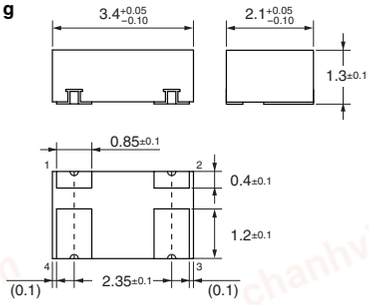

Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Unless otherwise specified, the dimensional tolerance is ± 0.1 mm.

Note: The actual product is marked differently from the image shown here.

■Safety Precautions

• Refer to "**Common Precautions**" for all G3VM models.

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Electronic and Mechanical Components Company

Regional Contact

Americas
https://www.components.omron.com/
Asia-Pacific
https://ecb.omron.com.sg/
Korea
https://www.omron-ecb.co.kr/
Europe
http://components.omron.eu/
China
https://www.ecb.omron.com.cn/
Japan
https://www.omron.co.jp/ecb/

© OMRON Corporation 2020-2021 All Rights Reserved.
In the interest of product improvement, specifications are subject to change without notice.

Cat. No. K334-E1-03
0421(1020)