chanhvinh.com

inventronics

Technical datasheet

IT DALI 40/220-240/1A0 E

ICUTRONIC - DALI (AstroDIM) IP20 | Constant current LED drivers



Product family features

- Supply voltage: 220…240 V
- AstroDim functionality
- Constant Lumen Output (CLO)
- Available with different wattage: 20 W, 40 W, 75 W, 110 W, 150 W, 200 W
- Output current range 350…1050 mA
- DALI-2 certified (Part 251, 252, 253)
- DALI dimming (min.10%)

Product family benefits

- Versatile DALI driver due to flexible output characteristic
- High surge protection: up to 10 kV (single pulse or more)
- Long lasting and high reliability
- Fully programmable via T4T software (DALI / AstroDIM / Constant Lumen)
- 5 years guarantee
- Great flexibility due to wide operating temperature range of up to -40…60 °C (+55°C for some products)
- Lifetime: up to 100,000 h (depending on T_c temperature, max. 10 % failure rate)
- High efficiency
- High-quality amplitude dimming

Specifications are subject to changes without notice.
© 2026,Inventronics. All rights reserved.

chanhvinh.com

Areas of application

- Street and urban lighting
- Industry
- Suitable for outdoor applications in luminaires with IP > 54
- Suitable for use in outdoor luminaires of protection class I and II

chanhvinh.com

chanhvinh.com

Technical data

Electrical data


Nominal input voltage	220…240 V
Mains frequency	50/60 Hz
Input voltage AC	198…264 V
Nominal input current at 230 V	0.20 A [1)]
Total harmonic distortion	< 10 % [2)]
Power factor λ	0.92C…0.99 [3)]
Efficiency in full-load	90.5 % [4)]
Device power loss	6.5 W [5)]
Inrush current	28 A [6)]
Max. ECG no. on circuit breaker 10 A (B)	12 [7)]
Max. ECG no. on circuit breaker 16 A (B)	19 [7)]
Surge capability (L-N)	6 kV [8)]
Surge capability (L/N-Ground)	10 kV [9)]
Nominal output voltage	29...57 V
U-OUT (working voltage)	60 V
Nominal output current	350…1050 mA [10)]
Minimum output current	70 mA [11)]
Default output current	700 mA
Output current tolerance	±5 %
Output ripple current (100 Hz)	< ±5 % [12)]
Output PSTLM	≤1
Output SVM	≤0.4
Nominal output power	40 W
Maximum output power	40 W

1) At full load, steady operation
2) At full load, 230 V, 50 Hz / see graphs
3) Full load at 230 V / 50 Hz
4) at 230 V, 50 Hz
5) At Full load, 230 V, 50 Hz
6) Max, th = 240µs
7) Type B
8) @ 2 Ohm, acc. to EN61547
9) EQUI @ 12 Ohm acc. to EN 61547
10) Default 700 mA; 200...1050 mA adjustable
11) Physical Minimum Dimming Current
12) Ripple average at 100 Hz

© 2026,Inventronics. All rights reserved.


chanhvinh.com

Typical Power Factor v Load

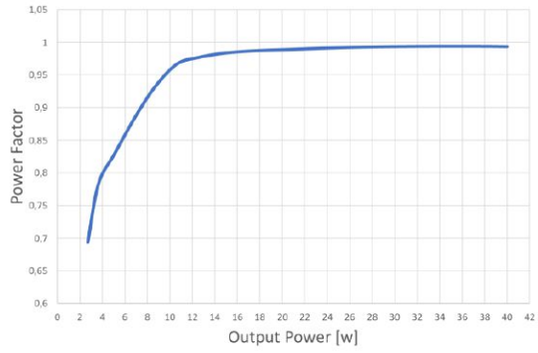


IT DALI 40 220-240 1A0 E Typical Power Factor vs. Load

Operating Window

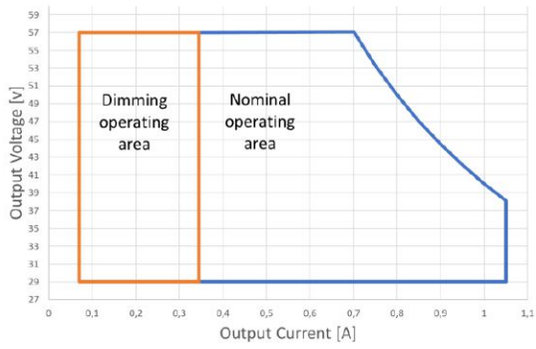


IT DALI 40 220-240 1A0 E Operating Window

Typical THD v Load

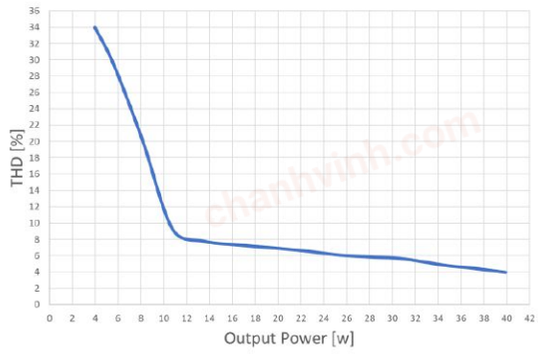

IT DALI 40 220-240 1A0 E Typical THD vs Load

Typical Efficiency v Load 230 V 50 Hz

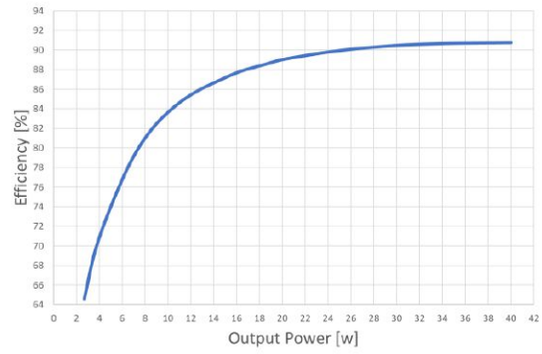


IT DALI 40 220-240 1A0 E Typical Efficiency vs. Load

© 2026,Inventronics. All rights reserved.

chanhvinh.com

Dimensions & weight

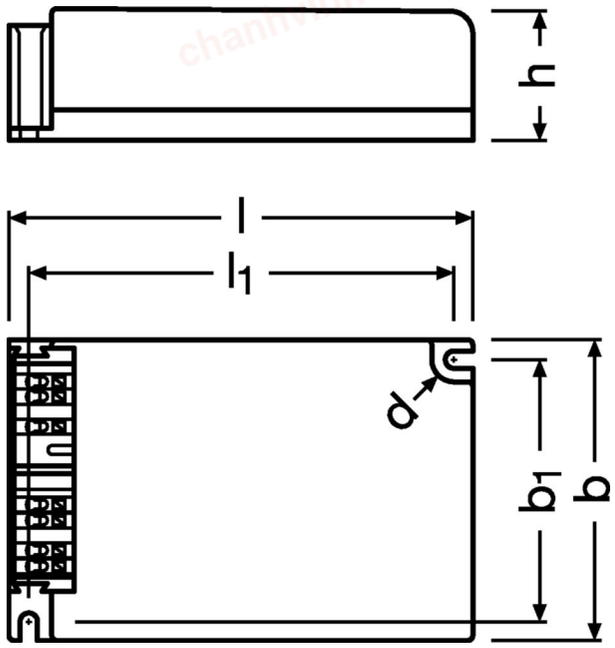

Product weight	140.00 g
Length	103.1 mm
Width	67.0 mm
Height	29.5 mm
Mounting hole spacing, length	94.0 mm
Mounting hole spacing, width	58.0 mm
Cable cross-section, input side	0.2…1.5 mm² 1)
Cable cross-section, output side	0.2…1.5 mm² 1)
Wire preparation length, input side	8.5…9.5 mm
Wire preparation length, output side	8.5…9.5 mm

1) Flexible / Solid leads

Colors & materials

Casing material	Plastic

Temperatures & operating conditions

Ambient temperature range	-40…+60 °C
Maximum temperature at tc test point	85 °C 1)
Max.housing temperature in case of fault	120 °C
Temperature range at storage	-25…85 °C
Permitted rel. humidity during operation	5…85 % 2)

1) Measured on tc point indicated on the product label.
2) Non-condensing

© 2026,Inventronics. All rights reserved.

chanhvinh.com

Lifespan

ECG lifetime	50000 h / 100000 h [1)]

1) T_c = 75°C, 0.2% / 1,000 h failure rate / T_c = 65°C, 0.1% / 1,000 h failure rate

Capabilities

Dimmable	Yes
Dimming interface	AstroDIM / DALI-2
Dimming range	10…100 %
DALI-2 Diagnostic Data	Yes [1)]
DALI-2 Energy Data	Yes [2)]
Constant lumen function	Programmable
LEDset	No
Max. cable length to lamp/LED module	2.0 m [3)]
Suitable for fixtures with prot. class	I / II
Type of connection, input side	Terminal
Type of connection, output side	Terminal
Number of channels	1
Overheating protection	Yes
Overload protection	Automatic reversible
Short-circuit protection	Yes
Intended for no-load operation	No
No-load proof	Yes

1) Acc. DALI part 253
2) Acc. DALI part 252
3) Output wires must be routed as close as possible to each other

chanhvinh.com

© 2026,Inventronics. All rights reserved.

chanhvinh.com

Programming

Programming device	DALI
Tuner4TRONIC	Yes
Tuner4TRONIC Field App	No
Box programming	No

Programmable features

DALI-2 Luminaire Data	Yes [1)]
Configuration Lock	Yes
AstroDIM	Yes
StepDIM	No
MainsDIM	No
Driver Guard	No
Emergency Mode	No

1) Acc. DALI part 251

Certificates & standards

Approval marks – approval	CCC / CE / EAC / RCM / DALI-2 / VDE / VDE-EMC / UKCA / ENEC
Standards	EN 61347-1 / EN 61347-2-13 / EN 55015 / EN 61547 / EN 61000-3-2 / EN 62384 / EN 62386
Type of protection	IP20

Logistical data

Commodity code	85044083900
Applicable region	APAC (excl. China, India, Japan) / EUROPE / MEA / SOUTH AMERICA


Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACh)	
Date of Declaration	28-07-2026
Primary Article Identifier	4052899620261 | 6937186112477
Declaration No. in SCIP database	In work
SCIP_STATUS	In work
SCIP_ID	


chanhvinh.com

chanhvinh.com

Wiring Diagram

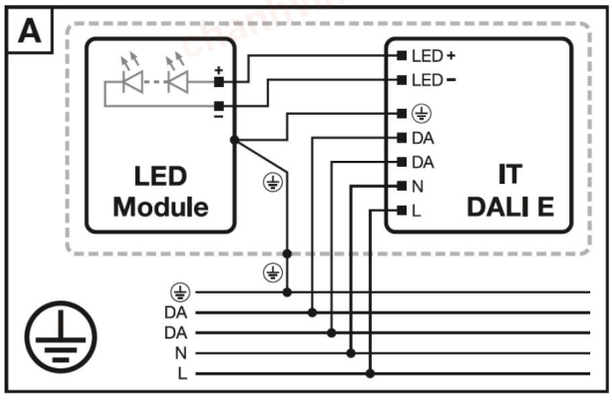

IT DALI 220-240 1A0 E Wiring Diagram

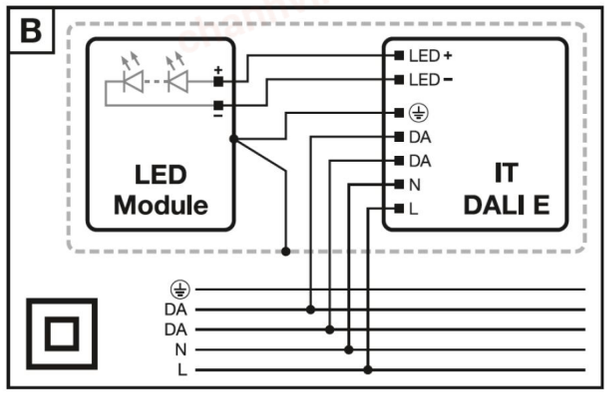

IT DALI 220-240 1A0 E Wiring Diagram

Ecodesign regulation information:

Intended for use with LED modules.
The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

© 2026,Inventronics. All rights reserved.

chanhvinh.com

Additional product information

- The driver withstands an input voltage of up to 300 V AC for a maximum of two hours. An output load shutdown can occur in case the supply voltage exceeds the input voltage range defined.
- Shut down of output load happens if the input voltage of the load is below the allowed minimum output voltage of the driver. The driver automatically tries to switch on the load cyclically.
- The driver automatically switches into protection mode when output voltage exceeds limit and return to normal when the fault condition is removed.
- The driver automatically reduces the output current in case the maximum allowed output power is exceeded.
- The driver automatically reduces the output current in case the maximum allowed output power is exceeded, as long as the input voltage of the load is within the declared output voltage range of the driver. In all other cases the driver may shut down the load.
- The driver is protected against temporary overheating by automatically reduction of the output current.
- The EQUI pin shall be connected to the heat sink of the LED module to improve the surge withstand capability of the system and EMI in critical luminaires.
- The constant lumen feature is disabled by default.
- If any output level is below the physical min level, the physical min level will be used.

chanhvinh.com

chanhvinh.com

Download Data

File		
Certificates	PDF	►VDE ENEC Certificate 40050684 INV
CAD data	UNKNOWN	►IT DALI 20/220-240/1A0 E | STEP
Mandatory Publications	PDF	►IT DALI E CE 4279760 04 060225
User instruction	PDF	►UI IT DALI 20 40 75 E

chanhvinh.com

chanhvinh.com

inventronics

Technical datasheet

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
6937186112477 INVENTRONICS	IT DALI 40/220-240/1A0 E	Shipping carton box 20 Pieces	345 x 216 x 86 mm	6.41 dm³	151.55 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit

References / Links

* For more information on the multi-level guarantee and the terms and conditions of the guarantee visit https://www.inventronics-light.com/multilevel-guarantees

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2026,Inventronics. All rights reserved.

chanhvinh.com

Accessories Optional

Product description	Accessory name	Accessory code
IT DALI 40/220-240/1A0 E	DALI magic	►6977078996907
IT DALI 40/220-240/1A0 E	DALI magic	►4008321582768
IT DALI 40/220-240/1A0 E	DALI magic	►6977078997416

chanhvinh.com