chanhvinh.com

Metal Film (Thin Film) Chip Resistors, High Reliability Type 0201, 0402, 0603, 0805, 1206

Type: **ERA 1A, 2A, 3A, 6A, 8A**

■ Features

- High reliability ·····Stable at high temperature and humidity
  (85 °C 85 %RH rated load, Category temperature range : –55 to +155 °C)
- High accuracy·····Small resistance tolerance and Temperature Coefficient of Resistance
- High performance·····Low current noise, excellent linearity
- Reference Standard·····IEC 60115-8, JIS C 5201-8, EIAJ RC-2133B
- AEC-Q200 qualified
- RoHS compliant

■ Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions

Please see Data Files

■ Explanation of Part Numbers

- E24 Series

1	2	3	4	5	6	7	8	9	10	11
E	R	A	3	A	E	B	1	0	2	V

Product Code
Metal Film Chip Resistors

Size, Power Rating	
Type: inch	Power Rating
1A : 0201	0.05 W
2A : 0402	0.063 W
3A : 0603	0.1 W
6A : 0805	0.125 W
8A : 1206	0.25 W

Temperature Coefficient	
Code	T.C.R.
R	±10×10^{-6}/°C
P	±15×10^{-6}/°C
E	±25×10^{-6}/°C
H	±50×10^{-6}/°C
K	±100×10^{-6}/°C

Resistance Tolerance	
Code	Tolerance
W	±0.05 %
B	±0.1 %
C	±0.25 %
D	±0.5 %

Packaging Methods		
Code	Packaging	Type
C	Pressed Carrier Taping 2 mm pitch, 15000 pcs.	ERA1A
X	Punched Carrier Taping 2 mm pitch, 10000 pcs.	ERA2A
V	Punched CarrierTaping 4 mm pitch, 5000 pcs.	ERA3A ERA6A ERA8A

Resistance Value
Consist of three figures for E24 series resistance value. The first two digits are significant figures of resistance and the third one denotes number of zeros following. (example) 102 : 1 kΩ

- E96 Series and other Resistance values

1	2	3	4	5	6	7	8	9	10	11	12
E	R	A	3	A	E	B	1	0	5	1	V

Product Code
Metal Film Chip Resistors

Size, Power Rating	
Type: inch	Power Rating
1A : 0201	0.05 W
2A : 0402	0.063 W
3A : 0603	0.1 W
6A : 0805	0.125 W
8A : 1206	0.25 W

Temperature Coefficient	
Code	T.C.R.
R	±10×10^{-6}/°C
P	±15×10^{-6}/°C
E	±25×10^{-6}/°C
H	±50×10^{-6}/°C
K	±100×10^{-6}/°C

Resistance Tolerance	
Code	Tolerance
W	±0.05 %
B	±0.1 %
C	±0.25 %
D	±0.5 %

Packaging Methods		
Code	Packaging	Type
C	Pressed Carrier Taping 2 mm pitch, 15000 pcs.	ERA1A
X	Punched Carrier Taping 2 mm pitch, 10000 pcs.	ERA2A
V	Punched CarrierTaping 4 mm pitch, 5000 pcs.	ERA3A ERA6A ERA8A


Resistance Value
Consist of four figures for E96 series resistance value. The first three digits are significant figures of resistance and the fourth one denotes number of zeros following. (example) 1051 : 1.05 kΩ

note : Duplicated resistance values as E24 series part numbers shall follow E24 part numbers. (apply three digit resistance value)


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

chanhvinh.com

■ Construction

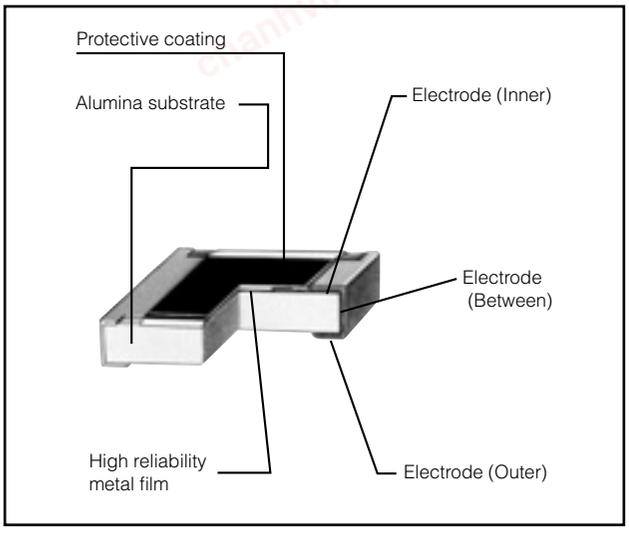

■ Dimensions in mm (not to scale)

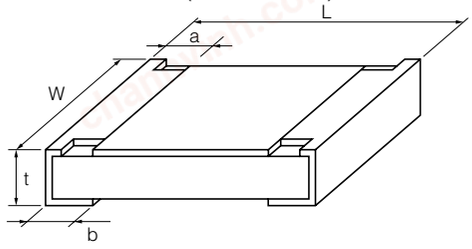

Type (inch size)	Dimensions (mm) L	W	a	b	t	Mass (Weight) [g/1000 pcs.]
ERA1A (0201)	$0.60^{\pm0.03}$	$0.30^{\pm0.03}$	$0.15^{\pm0.05}$	$0.15^{\pm0.05}$	$0.23^{\pm0.03}$	0.14
ERA2A (0402)	$1.00^{\pm0.10}$	$0.50^{+0.10}_{-0.05}$	$0.15^{\pm0.10}$	$0.25^{\pm0.10}$	$0.35^{\pm0.05}$	0.6
ERA3A (0603)	$1.60^{\pm0.20}$	$0.80^{\pm0.20}$	$0.30^{\pm0.20}$	$0.30^{\pm0.20}$	$0.45^{\pm0.10}$	2
ERA6A (0805)	$2.00^{\pm0.20}$	$1.25^{\pm0.10}$	$0.40^{\pm0.25}$	$0.40^{\pm0.25}$	$0.50^{\pm0.10}$	4
ERA8A (1206)	$3.20^{\pm0.20}$	$1.60^{+0.05}_{-0.15}$	$0.50^{\pm0.25}$	$0.50^{\pm0.25}$	$0.60^{\pm0.10}$	8


■ Ratings

Type (inch size)	Power Rating at 85 °C (W)	Limiting Element Voltage[1] (V)	Maximum Overload Voltage[2] (V)	Type (detail)	Resistance Tolerance (%)	T.C.R. ($\times10^{-6}$/°C)	Resistance Range[3][4] (Ω)	Category Temperature Range (°C)
ERA1A (0201)	0.05	25	50	ERA1AEB	±0.1	±25	100 to 10 k (E24, E96)	–55 to +155
				ERA1AEC	±0.25			
ERA2A (0402)	0.063	50	100	ERA2AKD	±0.5	±100	10 to 46.4 (E24, E96)	
				ERA2AED	±0.5	±25	47 to 100 k (E24, E96)	
				ERA2AEB	±0.1			
				ERA2APB	±0.1	±15	200 to 47 k (E24, E96)	
				ERA2ARC	±0.25	±10	200 to 47 k (E24, E96)	
				ERA2ARB	±0.1			
ERA3A (0603)	0.1	75	150	ERA3AHD	±0.5	±50	10 to 46.4 (E24, E96)	
				ERA3AED	±0.5	±25	47 to 330 k (E24, E96)	
				ERA3AEB	±0.1			
				ERA3APB	±0.1	±15	470 to 100 k (E24, E96)	
				ERA3ARB	±0.1	±10	1 k to 100 k (E24, E96)	
				ERA3ARW	±0.05			
ERA6A (0805)	0.125	100	200	ERA6AHD	±0.5	±50	10 to 46.4 (E24, E96)	
				ERA6AED	±0.5	±25	47 to 1 M (E24, E96)	
				ERA6AEB	±0.1			
				ERA6APB	±0.1	±15	470 to 100 k (E24, E96)	
				ERA6ARB	±0.1	±10	1 k to 100 k (E24, E96)	
				ERA6ARW	±0.05			
ERA8A (1206)	0.25	150	300	ERA8AHD	±0.5	±50	10 to 46.4 (E24, E96)	
				ERA8AED	±0.5	±25	47 to 1 M (E24, E96)	
				ERA8AEB	±0.1			
				ERA8APB	±0.1	±15	470 to 100 k (E24, E96)	
				ERA8ARB	±0.1	±10	1 k to 100 k (E24, E96)	
				ERA8ARW	±0.05			

(1) Rated Continuous Working Voltage (RCWV) shall be determined from RCWV=$\sqrt{\text{Rated Power} \times \text{Resistance Values}}$, or Limiting Element Voltage listed above, whichever less.
(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from SOTV=2.5 × Power Rating or max. Overload Voltage listed above whichever less.
(3) E192 series resistance values are also available. Please contact us for details.
(4) Duplicated resistance values between E96, E192 and E24 series shall follow E24 Part Numbers. (apply three digit resistance value)

Power Derating Curve

For resistors operated in ambient temperatures above 85 °C, power rating shall be derated in accordance with the figure on the right.

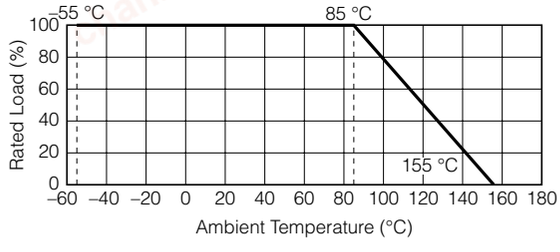

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.