

chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



A1C25-A
ACTUAL SIZE

PANDUIT PART NUMBER*	NOMINAL CABLE O.D. in./(mm)	A in. (mm)	B in. (mm)	C in. (mm)	STATIC LOAD** lbs./(g)	WEIGHT lbs./(g) 100 pcs.
A1C12-A	0.120 (3.0)	0.77 (19.6)	0.12 (3.0)	0.23 (5.8)	0.14 (64)	0.21 (95)
A1C25-A	0.250 (6.4)	0.91 (23.1)	0.25 (6.4)	0.38 (9.7)	0.14 (64)	0.32 (145)
A1C38-A	0.375 (9.5)	1.04 (26.4)	0.38 (9.7)	0.51 (13.0)	0.14 (64)	0.42 (190)
A1C50-A	0.500 (12.7)	1.17 (29.7)	.50 (12.7)	0.64 (16.3)	0.14 (64)	0.50 (227)

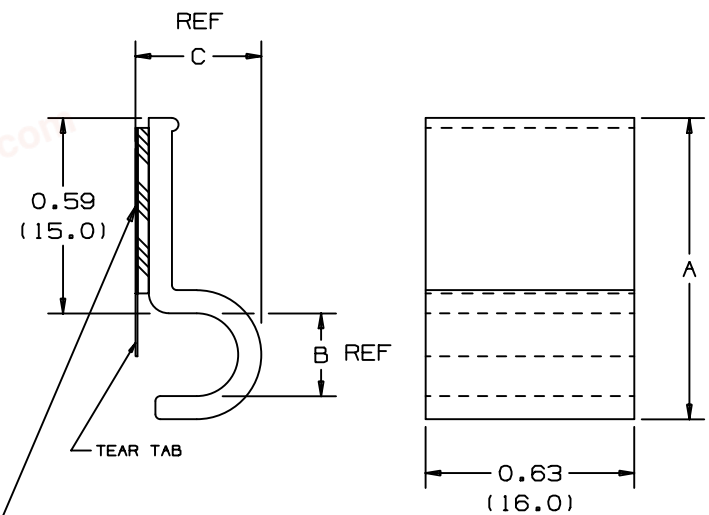

ADHESIVE TAPE--PRESSURE SENSITIVE FOAM .040 (1.02) THICK WITH RUBBER ADHESIVE AND PROTECTIVE LINER.
**MOUNT IS DESIGNED TO SUPPORT LISTED MAXIMUM STATIC LOAD ON A CLEAN, DRY, SMOOTH, GREASE-FREE SURFACE.

NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE BY PANDUIT WITH RESPECT TO ADHESIVE BOND PERFORMANCE. AMONG OTHER THINGS, THE CONDITIONS UNDER WHICH THESE MOUNTS MAY BE APPLIED AND/OR THE SURFACE TO WHICH THEY MAY BE APPLIED ARE BEYOND PANDUIT'S CONTROL.

TO APPLY MOUNT
1) REMOVE PROTECTIVE LINER.
2) PLACE IN DESIRED LOCATION.
3) APPLY PRESSURE TO MOUNT.

NOTES:
*1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP
2	6/15/01	LGG		ADDED REF TO DIM	GB0431BA 2		
1	2-16-94	SJSU		REVERSE TEAR TAB	GB0431BA 1		
R	11-5-93	SJSU		INITIAL RELEASE	GB0431BA R		

(DIMENSIONS IN PARENTHESES ARE IN METRIC.)

CAD FILENAME/LAYERS: GB0431BA_PB_A1CCLIPS_02

PANDUIT CORP. TINLEY PARK, ILLINOIS

A1C-A
ADHESIVE CLIP

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ±0.1(2.5) (.XXX) ± 0.020(.5)
(.XX) ±0.05(1.3) ANGLES ± 5°

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY: SJSU
DATE: 11-5-93
CHK'D:
MAT'L: GRAY PVC
SCALE: NONE
DRAWING NO.: GB0431BA
DWG SIZE: A