
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

## PANDUIT PART NUMBER SYSTEM

HSTT 12-48 Q 2

- COLOR:
  - BLANK = BLACK
  - 1 = BROWN
  - 2 = RED
  - 3 = ORANGE
  - 4 = YELLOW
  - 5 = GREEN
  - 6 = BLUE
  - 10 = WHITE
  - 45 = YELLOW/GREEN
  - C = CLEAR
- QUANTITY PER CARTON (48 IN ONLY)
  - Q = 25 PCS
  - 5 = 5 PCS
  - 2 = 2 PCS
- LENGTH INCHES [mm] / FEET [m]
  - 48 = [1219]
  - Y = [152.4]
  - M = 1000 [304.8]
  - D = 500 [152.4]
  - T = 200 [61]
  - C = 100 [30.5]
  - L = 50 [15.2]
  - Q = 25 [7.6]
- TUBING SIZE - EXPENDED I.D. (SEE CHART)
- TT = THIN WALL
  TTV = THIN WALL VW-1 RATED

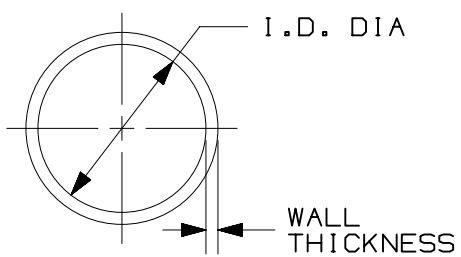


| HEAT SHRINK TUBING SIZE | MIN. EXPANDED I.D. IN [mm] | MAX. RECOVERED I.D. IN [mm] | NOMINAL REC. WALL THICKNESS IN [mm] |
|---|---|---|---|
| 05 | 0.046 [1.2] | 0.023 [.6] | 0.016 ±0.003 [0.406 ±0.076] |
| 06 | 0.063 [1.6] | 0.031 [.8] | 0.017 ±0.003 [0.432 ±0.076] |
| 09 | 0.093 [2.4] | 0.046 [1.2] | 0.020 ±0.003 [0.508 ±0.076] |
| 12 | 0.125 [3.2] | 0.062 [1.6] | 0.020 ±0.003 [0.508 ±0.076] |
| 19 | 0.187 [4.8] | 0.093 [2.4] | 0.020 ±0.003 [0.508 ±0.076] |
| 25 | 0.250 [6.4] | 0.125 [3.2] | 0.025 ±0.003 [0.635 ±0.076] |
| 38 | 0.375 [9.5] | 0.187 [4.8] | 0.025 ±0.003 [0.635 ±0.076] |
| 50 | 0.500 [12.7] | 0.250 [6.4] | 0.025 ±0.003 [0.635 ±0.076] |
| 75 | 0.750 [19.1] | 0.375 [9.5] | 0.030 ±0.003 [0.762 ±0.076] |
| 100 | 1.000 [25.4] | 0.500 [12.7] | 0.035 ±0.005 [0.889 ±0.127] |
| 150 | 1.500 [38.1] | 0.750 [19.1] | 0.040 ±0.006 [1.016 ±0.152] |
| 200 | 2.000 [50.8] | 1.000 [25.4] | 0.045 ±0.007 [1.143 ±0.178] |
| 300 | 3.000 [76.2] | 1.500 [38.1] | 0.050 ±0.008 [1.270 ±0.203] |
| 400 | 4.000 [101.6] | 2.000 [50.8] | 0.055 ±0.009 [1.397 ±0.229] |

NOTES:

1. MATERIAL: CROSSLINKED POLYOLEFIN
2. SHRINK RATIO: 2:1
3. "ALL WARRANTIES, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE EXCLUDED. (USER IS RESPONSIBLE TO DETERMINE SUITABILITY OF PRODUCT FOR INTENDED USE)."
5. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX.
6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVLENT [mm]
7. REELS OF THE PRODUCT ARE ALLOWED TO HAVE SPLICES.

| PACK CODE | M | D | T | C | L | Q |
|---|---|---|---|---|---|---|
| ALLOWED SPLICES | 4 | 3 | 2 | 1 | 1 | 0 |

| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|---|---|---|---|---|---|---|
| 4 | 07-29-15 | JBN | MRJS | RGRO | F. UPDATED DRAWING TO CURRENT STANDARDS AND REMOVED PRIOR REVISION MARKS | GB0239KH |

TITLE

# THIN WALL HEAT SHRINK TUBING (HSTT / HSTTV)

CUSTOMER DRAWING

ITEM REVISION NAME: G035970M/00

DATASET FILE NAME: G035970M_DC_GB0239KH_REV03/00A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.x ± .05 [1.3] .xxx ± .010 [.25]
.xx ± .02 [.5] ANGLES ± 5 °

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: GB0239KH

| DRAWN BY | DATE | CHK | SCALE | SIZE |
|---|---|---|---|---|
| LGRAVITT | 05-12-03 | | N.T.S. | A |

SHT 1 OF 1

D10100DA/16