
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm²]	DIMENSIONS in. [mm]		
		L ± .02 [0,51]	B DIA. ± .01 [0,25]	C ± .01 [0,25]
BS18	#22-18 [0,5-1,0]	.62 [15,7]	.14 [3,6]	.032 [0,81]
BS14	#16-14 [1,5-2,5]	.62 [15,7]	.16 [4,1]	.032 [0,81]
BS10	#12-10 [4,0-6,0]	.63 [16,0]	.22 [5,6]	.040 [1,02]

NOTES:
1. USED FOR:
   A. SOLID OR STRANDED COPPER WIRE
   B. 302°F [150°C] MAX. TEMPERATURE RATING
2. INSTALLATION TOOLS:
   A. UL LISTED AND CSA CERTIFIED:
      CT-100A, CT-200, CT-600A (CT-570CH),
      CT-1570, CT-2500(CT-2570CH)
   B. PANDUIT APPROVED: CT-160, CT-260
3. WIRE STRIP LENGTH: 9/32 $^{+1/32}_{-0}$ [7,1 $^{+0,8}_{-0}$]
4. MATERIAL:
   A. STAMPING: COPPER, TIN PLATED
5. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

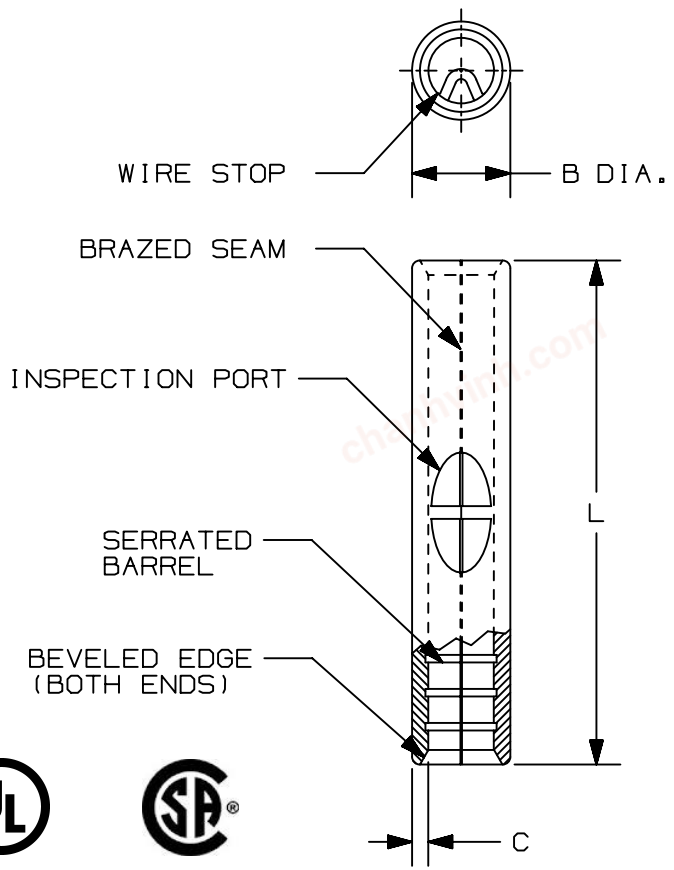

LISTED 587H E52164

CERTIFIED LR31212

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
08	09.06.12	JBN	LCA	VMB	REVISED NOTES. ADDED METRIC EQUIVALENTS. UPDATED DRAWING TO CURRENT STANDARD.	A41338

TITLE

BUTT SPLICE, NON- INSULATED #22-10

CUSTOMER DRAWING

ITEM REVISION NAME: N41338BA/08

DATASET FILE NAME: N41338BA_DC/08A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.x ± .1 [2.54] .xxx ± .005 [.13]

.xx ± .01 [.25] ANGLES ± 5 °

THIRD ANGLE PROJECTION

MATERIAL:

DRAWING NUMBER: A41338

DRAWN BY	DATE	CHK	SCALE	SHEET 1 OF 1	SIZE
DAW	-	-	N.T.S		A

D10100DA/12