
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE SIZE AWG	DIMENSIONS – in [mm]			
		A ± .03 [0,8]	B ± .01 [0,3]	C ± .01 [0,3]	D ± .03 [0,8]
BSN22J	26-22	.79 [20,1]	.08 [2,0]	.04 [1,0]	.47 [11,9]

INSTALLATION TOOL
CT-1300

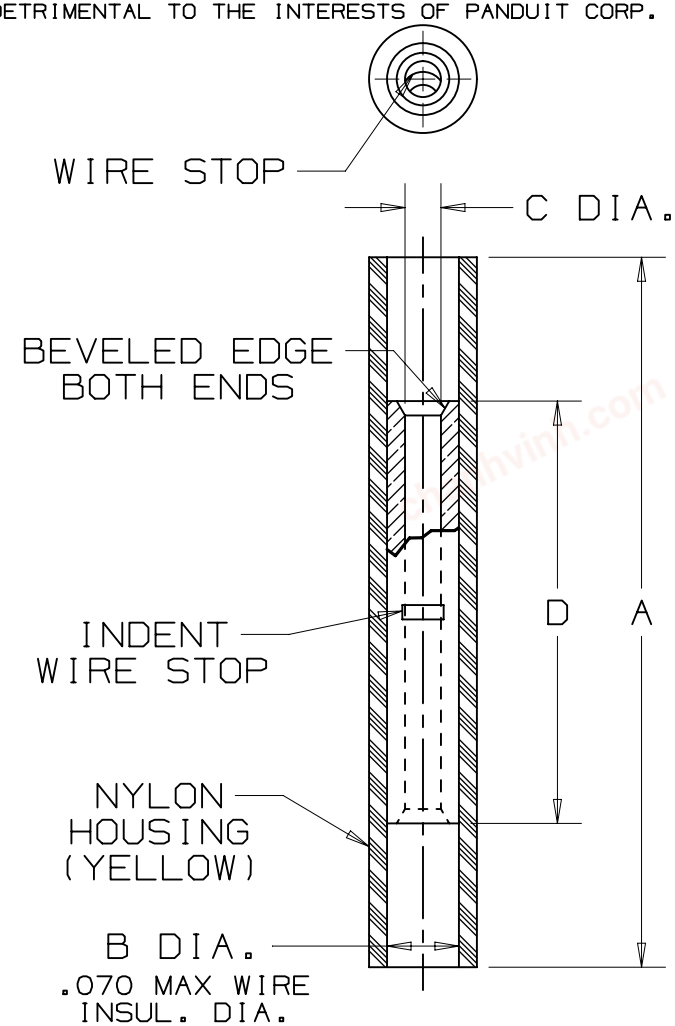

NOTES:

1. RECOMMENDED FOR:
   A. #26-22 AWG SOLID OR STRANDED COPPER WIRE
   B. 221°F [105°C] MAX TEMP. RATING
   C. 600V MAX VOLTAGE RATING

2. MATERIAL:
   A. STAMPING: .02" [0,5] THK COPPER, TIN PLATED
   B. HOUSING: NYLON, YELLOW

3. SEE www.panduit.com FOR PACKAGE QUANTITIES

4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS

5. WIRE STRIP LENGTH: 1/4" $^{+1/32}_{-0}$ [6,4mm $^{+0,8}_{-0}$]

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	9-18-24	JHNU	JHNU	MRWA	DRAWING RELEASED	006195

D10100DA/16

TITLE

BUTT SPLICE, NYLON INSULATED #26-22 AWG

CUSTOMER DRAWING

ITEM REVISION NAME: 03365NBB/00

DATASET FILE NAME: 03365NBB-DC/00A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.x ± .1 [2.54] .xxx ± .005 [.127]

.xx ± .01 [.25] ANGLES ± 5 °

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: 03365NBB-DC

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
JHNU	9-18-24	JHNU	NONE		A