
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

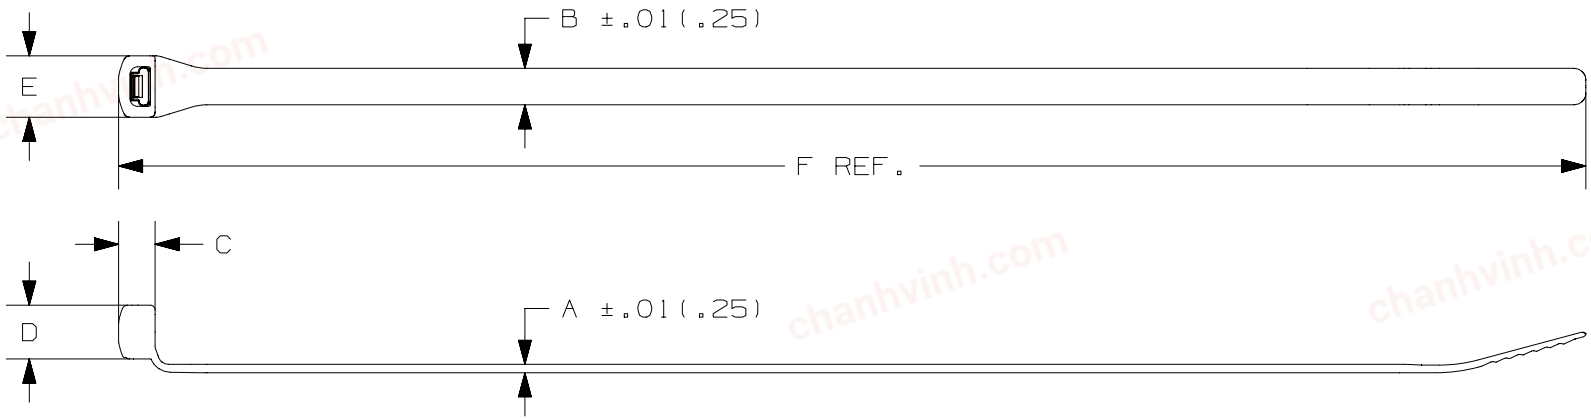

PANDUIT * PART NO.	BUNDLE DIA. MIN in (mm)	BUNDLE DIA. MAX in (mm)	A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	MIN. LOOP TENSILE lbs (N)	CROSS-SECTION	WEIGHT lbs/100pcs (g)
CBR2S	.160 (4.1)	2.0 (50.8)	.044 (1.1)	.190 (4.8)	.190 (4.8)	.280 (7.1)	.332 (8.4)	7.6 (193)	50 (222)	STANDARD	.24 (107)
CBR3S	.280 (7.1)	3.0 (76.2)	.052 (1.3)	.190 (4.8)	.215 (5.5)	.280 (7.1)	.332 (8.4)	10.8 (274.3)	50 (222)	STANDARD	.39 (174.8)
CBR4S	.280 (7.1)	4.0 (101.6)	.052 (1.3)	.190 (4.8)	.215 (5.5)	.280 (7.1)	.332 (8.4)	14.0 (355.6)	50 (222)	STANDARD	.48 (218.6)
CBR2HS	.160 (4.1)	2.0 (50.8)	.058 (1.4)	.250 (6.4)	.240 (6.1)	.326 (8.2)	.388 (9.9)	8.0 (203.2)	85 (378)	HEAVY/STANDARD	.43 (195)
CBR4LH	.315 (8.0)	4.0 (101.6)	.070 (1.8)	.300 (7.6)	.322 (8.2)	.400 (10.2)	.490 (12.4)	14.6 (370.8)	120 (534)	LIGHT/HEAVY	1.13 (515.8)
CBR6LH	.315 (8.0)	6.0 (152.4)	.070 (1.8)	.300 (7.6)	.322 (8.2)	.400 (10.2)	.490 (12.4)	20.9 (530.9)	120 (534)	LIGHT/HEAVY	1.61 (731.5)

* SEE www.panduit.com FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
05	6/19/15	BWG	MPH	JADE	CORRECTED MATERIAL NOTE.	SS-27295/05
4	11.19.14	BDK	MPH	JADE	UPDATED TITLE BORDER AND UPDATED NOTES	SS-27295

TITLE

CBR SERIES CABLE TIE

CUSTOMER DRAWING

ITEM REVISION NAME: 10B0150V/01

DATASET FILE NAME: 10B0150V_DC/01_SS-27295_REV05

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± .01 [.25] .XXX ± .020 [.51]

.XX ± .02 [.5] ANGLES ±

THIRD ANGLE PROJECTION

PANDUIT

MATERIAL: NYLON 6.6

DRAWING NUMBER: SS-27295

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
JABO	6/22/01	TGS	NONE		A

D10100DA/16