

chanhvinh.com


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PART NUMBER	"L"	"W"	"H"	Ø A	Ø B	C REF. (A)	Ø D REF. (A)	E REF. (B)	WEIGHT grams/100pcs (C)
CLC100X3S8**	4.3 [110]	1.1 [28]	0.7 [18]	1.11 [28.2]	1.03 [26.1]	1.5 [38]	0.32 [8]	1.5 (38)	1,748
CLC100X2S8**	2.8 [72]							N/A	1,071
CLC100X1S8**	1.9 [50]							N/A	896
CLC88X3S8**	4.3 [110]			1.05 [26.7]	0.93 [23.7]			1.5 (38)	1,916
CLC88X2S8**	2.8 [72]							N/A	1,183
CLC88X1S8**	1.9 [50]							N/A	953
CLC75X3S8**	4.3 [110]			0.94 [23.8]	0.83 [21.2]			1.5 (38)	2,114
CLC75X2S8**	2.8 [72]							N/A	1,315
CLC75X1S8**	1.9 [50]							N/A	1,018
CLC62X3S8**	4.3 [110]			0.82 [20.7]	0.70 [17.7]			1.5 (38)	2,307
CLC62X2S8**	2.8 [72]							N/A	1,443
CLC62X1S8**	1.9 [50]							N/A	1,083

NOTES:
1. MATERIAL: PA6.6 13% GF HEAT STABLE PER ASTM D4066, BLACK IN COLOR
2. FINISH: PLAIN
3. CONTINUOUS OPERATING TEMPERATURE: -40°F TO 275°F
4. QUANTITY OF ONE (1) PART IS AS SHOWN. QUANTITY OF TWO (2) PARTS NEEDED FOR A COMPLETE CLAMP.

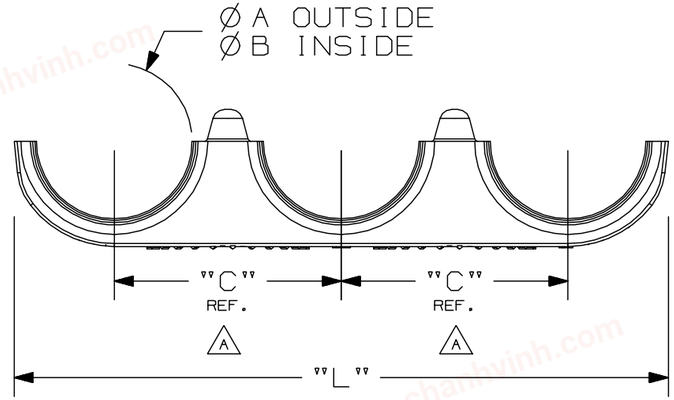



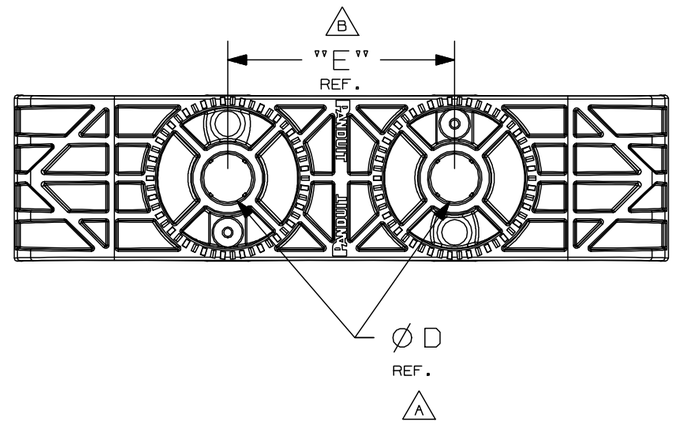

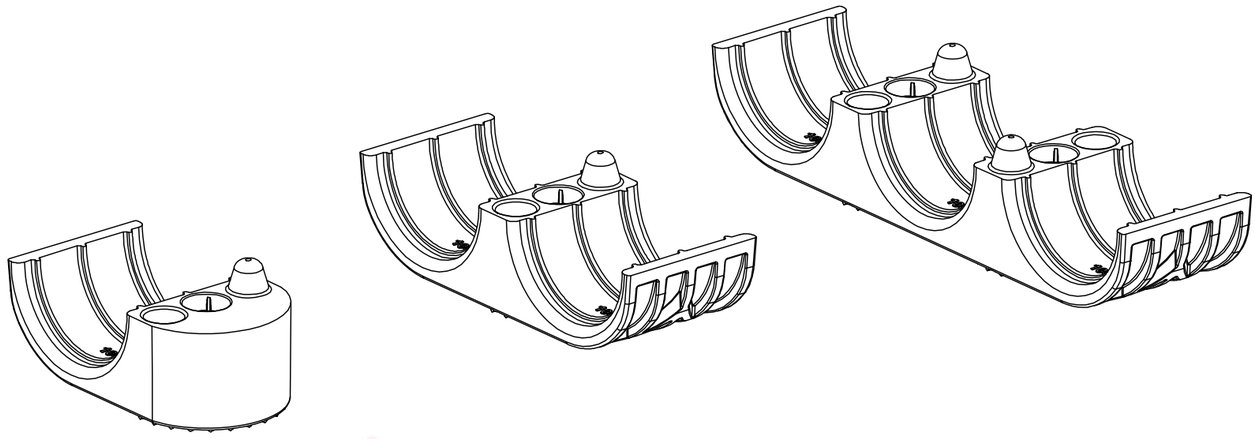

CLC**X1S8** CLC**X2S8** CLC**X3S8**

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03	3/3/22	DJSL	DAEI	ALP	C. UPDATED PART WEIGHTS	1004880/03
02	2/2/22	DJSL	DAEI	ALP	B. ADDED "E" DIMENSION	1004880/02
01	8/2/21	DJSL	DAEI	ALP	A. UPDATED DIMENSION AS REFERENCE	1004880/01
00	2/26/21	DJSL	LAH	ALP	DRAWING RELEASED	1004880/00

TITLE: CORRIGATED LOOM CLAMP

CUSTOMER DRAWING

ITEM REVISION NAME: 00875EAA/03

DATASET FILE NAME: 00875EAA_DC/03

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .1 [2.54] .XXX ± .005 [.127]
.XX ± .01 [.25] ANGLES ± 1°
THIRD ANGLE PROJECTION

MATERIAL: PA 6.6 13% GLASS, HEAT STABLE

DRAWING NUMBER: 00875EAA_DC

DRAWN BY	DATE	CHK	SCALE	SIZE
DJSL	2/26/21	LAH	FULL	B

SHT 1 OF 1

NXGLOBAL_BSIZE