
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	TAB SIZE in. [mm]	WIRE RANGE AWG [mm²]	COLOR	DIMENSIONS in. [mm]				
				MAX. INSUL.	MIN. INSUL.	L ± .03 [0,8]	B ± .01 [0,3]	C ± .004 [0,1]
DNF18-250	.250 X .032 [6,4 X 0,8]	#22-18 [0,5-1,0]	RED	.14 [3,6]	.04 [1,0]	.81 [20,6]	.29 [7,4]	.12 [3,1]
DNF14-250		#16-14 [1,5-2,5]	BLUE	.16 [4,1]	.05 [1,3]	.83 [21,1]	.29 [7,4]	.12 [3,1]

NOTES:
1. USED FOR:
   A. STRANDED COPPER WIRE ONLY
   B. 194°F [90°C] MAX. OPERATING TEMPERATURE
   C. 300 V. MAX VOLTAGE RATING
   D. 6-12 LBS INITIAL INSERTION/WITHDRAWL FORCE
2. INSTALLATION TOOLS:
   A. UL LISTED AND CSA CERTIFIED: CT-1550, CT-1551 CT-600A (CT-570CH), CT-2500 (CT-2570CH)
   B. PANDUIT APPROVED: CT-100A, CT-160, CT-260, CT-1550, CT-1551
3. WIRE STRIP LENGTH: 9/32" $^{+1/32}_{-0}$ [7,1 $^{+0,8}_{-0}$]
4. MATERIAL:
   A. STAMPING: BRASS, TIN PLATED
   B. HOUSING: NYLON
   C. SLEEVE: BRASS, TIN PLATED
5. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

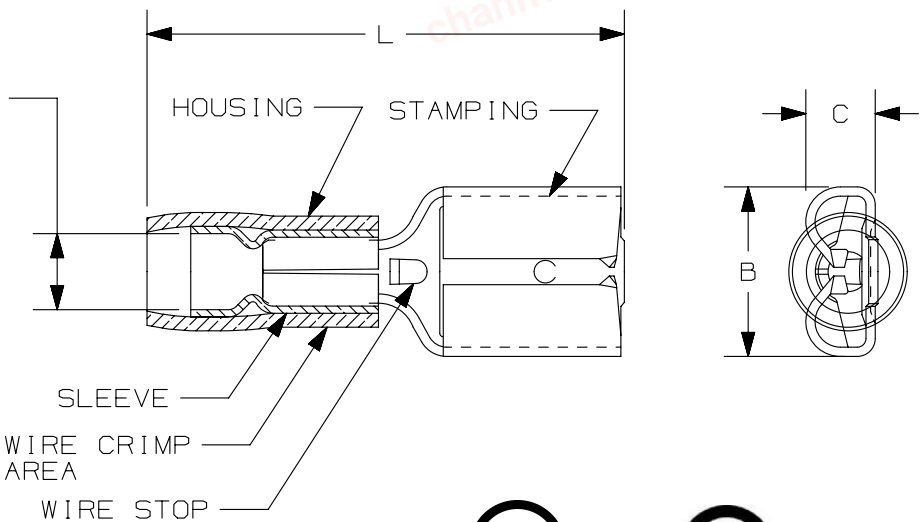

LISTED 20H3 E78522

CERTIFIED LR31212

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
08	10.02.12	JBN	LCA	VMB	ADDED METRIC EQUIVALENT. REVISED NOTES. UPDATED TO CURRENT STANDARDS.	A41200

TITLE

FEMALE DISCONNECTS, NYLON INSULATED, FUNNEL

CUSTOMER DRAWING

ITEM REVISION NAME: N41200BA/08

DATASET FILE NAME: N41200BA_DC/08A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.x ± .1 [2.54] .xxx ± .005 [.13]
.xx ± .01 [.25] ANGLES ± 5°

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: A41200

DRAWN BY	DATE	CHK	SCALE	SIZE
FES	-	LA	N.T.S.	A

SHEET 1 OF 1

D10100DA/12