chanhvinh.com


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

	PANDUIT PART #	TAB SIZE	WIRE RANGE ENGLISH	WIRE RANGE METRIC	COLOR	MAX. WIRE INSUL. DIA.	DIMENSIONS in. [mm] L ± .03 [0,8]	W ± .01 [0,3]	H ± .02 [0,5]	WIRE STRIP LENGTH
	DNF18-250FIB	**.250 X .032 [6,3 X 0,8]**	**22-18**	**0,5-1,0**	**RED**	**.14 [3,6]**	**.84 [21,3]**	**.35 [8,9]**	**.22 [5,6]**	9/32 +1/32 -0 [7,1 +0,8 -0]
(A)	DNF18-205FIB	.205/.187 X .032 [5,2/4,8 X 0,8]					.78 [19,8]	.31 [7,9]	.22 [5,6]	
	DNF18-206FIB	.205/.187 X .020 [5,2/4,8 X 0,5]					.78 [19,8]	.31 [7,9]	.22 [5,6]	
	DNF18-187FIB	.187 X .032 [4,8 X 0,8]					.78 [19,8]	.29 [7,4]	.16 [4,1]	
	DNF18-188FIB	.187 X .020 [4,8 X 0,5]					.78 [19,8]	.29 [7,4]	.16 [4,1]	
	DNF14-250FIB	.250 X .032 [6,3 X 0,8]	16-14	1,5-2,5	BLUE	.16 [4,1]	.84 [21,3]	.35 [8,9]	.22 [5,6]	
	DNF14-205FIB	.205/.187 X .032 [5,2/4,8 X 0,8]					.78 [19,8]	.31 [7,9]	.22 [5,6]	
	DNF14-206FIB	.205/.187 X .020 [5,2/4,8 X 0,5]					.78 [19,8]	.31 [7,9]	.22 [5,6]	
	DNF14-187FIB	.187 X .032 [4,8 X 0,8]					.78 [19,8]	.29 [7,4]	.18 [4,6]	
	DNF14-188FIB	.187 X .020 [4,8 X 0,5]					.78 [19,8]	.29 [7,4]	.18 [4,6]	
	DNF10-250FIB	.250 X .032 [6,3 X 0,8]	12-10	4,0-6,0	YELLOW	.22 [6,0]	.96 [24,4]	.35 [8,9]	.23 [5,8]	3/8 +1/32 -0 [9,5 +0,8 -0]

LISTED 587H E78522

CERTIFIED LR31212

NOTES:
1. USED FOR:
   A. STRANDED COPPER WIRE ONLY
   B. 221°F [105°C] MAX. OPERATING TEMPERATURE (CSA)
   C. 257°F [125°C] MAX. OPERATING TEMPERATURE (UL)
   D. 600V. MAX. VOLTAGE RATING
2. MATERIAL:
   A. STAMPING: CDA 260 BRASS, TIN PLATED
   B. HOUSING: TYPE 66 NYLON
3. INSTALLATION TOOLS:
   A. UL LISTED AND CSA CERTIFIED:
      CT-1525, CT-2500 (CT-2520CH)
   B. PANDUIT APPROVED: CT-100A, CT-160, CT-260, CT-600A (CT-520CH)
3. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
4. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
5. COLORS ARE TRANSLUCENT.
6. DNF10-250FIB IS UL APPROVED FOR USE WITH THE FOLLOWING WIRE COMBINATIONS: (2) #14, (2) #16, (2) #18 TWIST WIRES TOGETHER BEFORE CRIMPING
7. INITIAL INSERTION/WITHDRAW FORCE: 6-12 Lb [27-32 N]

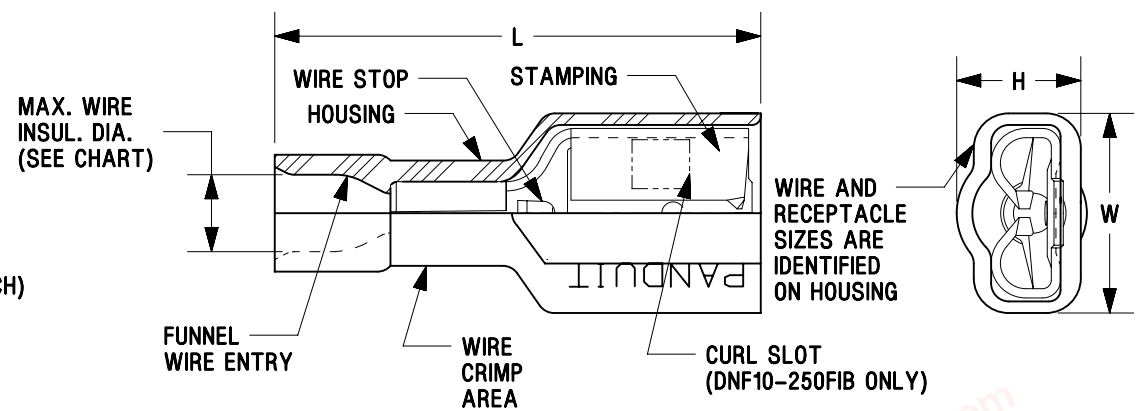

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
20	10/17/2019	HPR	CLN	JADE	Tab Sizes corrected for – DNF14-250FIB, DNF14-205FIB, DNF14-206FIB	053133
19	05-22-19	HPR	DC	JADE	Tab sizes added for – DNF18-206FIB, DNF18-188FIB, DNF14-250FIB, DNF14-206FIB, DNF14-187FIB	046833
18	3-19-19	JEH	SKB	JADE	WAS: (A) DNF18-205FIBR	045190
17	10.19.12	JBN	LCA	VMB	ADDED METRIC EQUIVALENT. UPDATED DRAWING TO CURRENT STANDARDS.	A41196

TITLE
FEMALE DISCONNECTS, NYLON FULLY INSULATED, FUNNEL ENTRY
CUSTOMER DRAWING

ITEM REVISION NAME: N10923BA/20

DATASET FILE NAME: N10923BA_DC/20A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.x ± .1 [2.54] .xxx ± .005 [.127]
.xx ± .01 [.25] ANGLES ± 5 °
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: A41196

DRAWN BY	DATE	CHK	SCALE	SHEET	SIZE
WJB	01.06.99	–	N.T.S.	SHEET 1 OF 1	A