
chanhvinh.com


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	TAB SIZE	WIRE RANGE ENGLISH	WIRE RANGE METRIC	COLOR	MAX. WIRE INSULATION DIAMETER	DIMENSIONS in. [mm] L ± .03 [0,8]	DIMENSIONS in. [mm] W ± .02 [0,5]	DIMENSIONS in. [mm] H ± .02 [0,5]	WIRE STRIP LENGTH	TOOL CHART
DNF18-250FIM	.250 X .032 [6,3 X 0,8]	22-18	0,5-1,0	RED	.13 [3,4]	.90 [22,9]	.42 [10,7]	.27 [6,9]	9/32 +1/32 -0 [7,1 +0,8 -0]	CT-100A (DNF18 ONLY) CT-600A W/CT-520CH CT-1525 CT-2500 W/CT-2525CH/CD-525
DNF14-250FIM	.250 X .032 [6,3 X 0,8]	16-14	1,5-2,5	BLUE	.16 [4,0]	.90 [22,9]	.42 [10,7]	.27 [6,9]		

NOTES:

1. USED FOR:
   A. STRANDED COPPER WIRE ONLY
   B. 221°F [105°C] MAX. OPERATING TEMPERATURE (CSA)
   C. 257°F [125°C] MAX. OPERATING TEMPERATURE (UL)
   D. 600V. MAX. BLDG WIRE
      (1000 V. MAX. IN SIGNS, FIXTURES & LUMINAIRES)
2. MATERIAL:
   A. STAMPING: CDA 260 BRASS, NICKEL PLATED
   B. HOUSING: TYPE 6/6 NYLON
3. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
4. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
5. NYLON HOUSING IS TRANSLUCENT

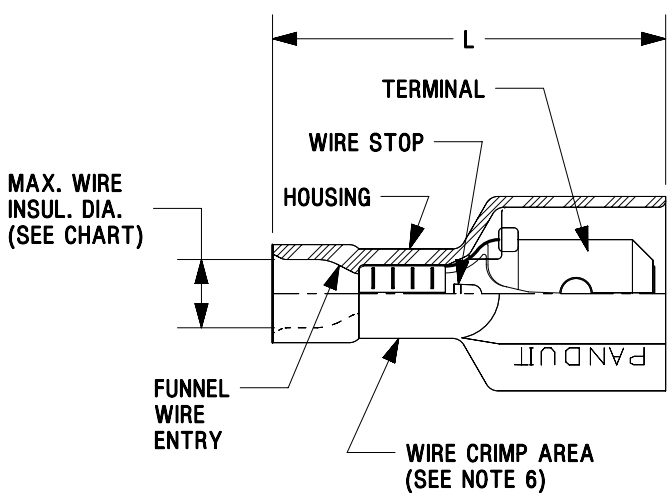

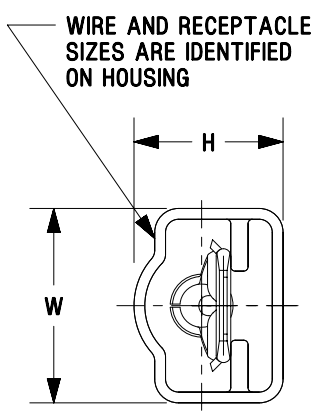

LISTED 20H3 E78522

CERTIFIED LR31212

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
11	11/14	JHNU	JHNU	RGB	REVISED PART NUMBER: DNF14-250FIM WAS PNF14-250FIM	N41235BA-DC
10	09.	BDK	LCA	VMB	CRIMP TOOL CHART: REMOVED CT-520 ADDED W/CT-520CH AND W/CT-2525CH/CD-525 BROUGHT DRAWING TO CURRENT STANDARDS	A41325

TITLE: LOOSE PIECE FULLY INSULATED MALE DISCONNECT .250 X .032

CUSTOMER DRAWING

ITEM REVISION NAME: N41325BA/11

DATASET FILE NAME: N41325BA_DC/11A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.x ± .1 [2.54] .xxx ± .005 [.127]

.xx ± .01 [.25] ANGLES ± 5 °

THIRD ANGLE PROJECTION

PANDUIT™

MATERIAL: SEE NOTES

DRAWING NUMBER: A41325

DRAWN BY	DATE	CHK	SCALE	SIZE
JV	-	LM	N.T.S.	A

SHEET 1 OF 1

D10100DA/12